

2018 FACTOLED  
CATALOGUE  
LED LIGHTING

[WWW.FACTOLED.COM](http://WWW.FACTOLED.COM)

[HTTP://FACTOLED.EN.ALIBABA.COM](http://FACTOLED.EN.ALIBABA.COM)

# NEW GENERATION


FREE CUTSIZE LED PANEL LIGHT



# LED FREE CUT SIZE PANEL LIGHT



MODEL	LDY8011	LDY16011	LDY20011
Power:	8W	16W	20W
Luminous:	500lm	1200lm	1600lm
Input Voltage:	170-265V	170-265V	170-265V
PF:	0.5	0.5	0.5
Material:	Aluminum+PC	Aluminum+PC	Aluminum+PC
Lamp size:	ø120mm	ø175mm	ø225mm
Cut size:	ø55-105mm	ø55-155mm	ø55-200mm
Light source:	SMD2835	SMD2835	SMD2835
CRI:	75	75	75

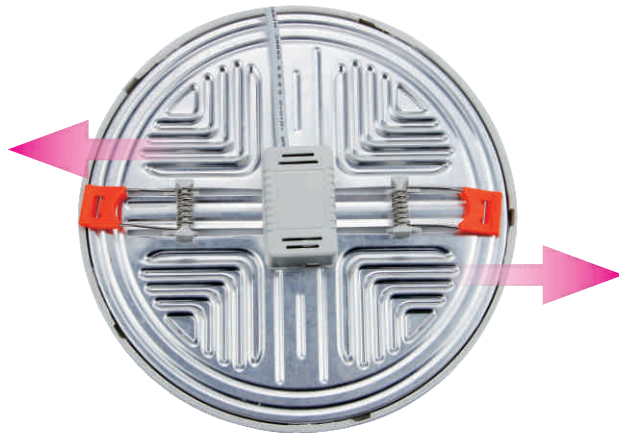

## FEATURE:

- FREE CUT HOLE DESIGN
- ROUND AND SQUARE AVAILABLE
- ALUMINUM + PC BODY
- High transmittance Polycarbonate cover
- HIGH LUMEN LED SMD 2835
- Recessed, easy to install
- Separated and Integrated driver selectable

# LED RIMLESS PANEL LIGHT



## FEATURE:

- Rimless frame design, modern and elegant
- Body paint with white or black aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



## MODEL

	<b>LDY16008M</b>	<b>LDY24008M</b>	<b>LDY30008M</b>
<b>Power:</b>	16W	24W	30W
<b>Luminous:</b>	1200lm	2100lm	2600lm
<b>Input Voltage:</b>	85-265V	85-265V	85-265V
<b>PF:</b>	0.5	0.5	0.5
<b>Material:</b>	Aluminum+PC	Aluminum+PC	Aluminum+PC
<b>Lamp size:</b>	ø120mm	ø175mm	ø225mm
<b>Light source:</b>	SMD2835	SMD2835	SMD2835
<b>CRI:</b>	85	85	85



## FEATURE:

- Rimless frame design, modern and elegant
- Body paint with white or black aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



## MODEL

	<b>LDF16008M</b>	<b>LDF24008M</b>	<b>LDF30008M</b>
<b>Power:</b>	16W	24W	30W
<b>Luminous:</b>	1200lm	2100lm	2600lm
<b>Input Voltage:</b>	85-265V	85-265V	85-265V
<b>PF:</b>	0.5	0.5	0.5
<b>Material:</b>	Aluminum+PC	Aluminum+PC	Aluminum+PC
<b>Lamp size:</b>	120x120mm	175x175mm	225x225mm
<b>Light source:</b>	SMD2835	SMD2835	SMD2835
<b>CRI:</b>	75	75	75



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com

# DOUBLE COLOR SLIM PANEL LIGHT



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Recessed
- Separated driver, AC85-265V
- Different color for your selection



MODEL	LDY6012/3+3	LDY9012/6+3	LDY16012/12+4	LDY24012/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	400lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	ø105mm	ø145mm	ø190mm	ø240mm
Cut size:	ø75mm	ø110mm	ø160mm	ø210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Recessed
- Separated driver, AC85-265V
- Different color for your selecton



MODEL	LDF6012/3+3	LDF9012/6+3	LDF16012/12+4	LDF24012/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	400lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	105x105mm	145x145mm	190x190mm	240x240mm
Cut size:	75x75mm	110x110mm	160x160mm	210x210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



# DOUBLE COLOR SLIM PANEL LIGHT



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Recessed
- Separated driver, AC85-265V
- Different color for your selection



MODEL	LDY6011-1	LDY9011-1	LDY16011-1	LDY24011-1
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	480lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	ø115mm	ø155mm	ø190mm	ø250mm
Cut size:	ø80mm	ø120mm	ø175mm	ø210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Recessed
- Separated driver, AC85-265V
- Different color for your selection



MODEL	LDY6011-2	LDY9011-2	LDY16011-2	LDY24011-2
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	480lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	ø115mm	ø155mm	ø190mm	ø250mm
Cut size:	ø80mm	ø120mm	ø175mm	ø210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



# DOUBLE COLOR SURFACE PANEL LIGHT



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Surface mounted
- Different color for your selection



MODEL	LDY5012M/3+3	LDY9012M/6+3	LDY16012M/12+4	LDY24012M/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	400lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	ø105mm	ø145mm	ø190mm	ø240mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Surface mounted
- Different color for your selection



MODEL	LDF5012M/3+3	LDF9012M/6+3	LDF16012M/12+4	LDF24012M/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	400lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	105x105mm	145x145mm	190x190mm	240x240mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



# DOUBLE COLOR SLIM PANEL LIGHT



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Recessed
- Separated driver, AC85-265V
- Different color for your selection



MODEL	LDY6012Q/3+3	LDY9012Q/6+3	LDY16012Q/12+4	LDY24012Q/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	480lm	720lm	1520lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	ø105mm	ø145mm	ø195mm	ø245mm
Cut size:	ø75mm	ø105mm	ø155mm	ø210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Recessed
- Separated driver, AC85-265V
- Different color for your selection



MODEL	LDF6012Q/3+3	LDF9012Q/6+3	LDF16012Q/12+4	LDF24012Q/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	480lm	720lm	1520lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	105x105mm	145x145mm	195x195mm	245x245mm
Cut size:	75x75mm	105x105mm	155x155mm	210x210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com [5]



# BUBBLE DOUBLE COLOR SURFACE PANEL



## FEATURE:

- Bubble effect
- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Surface mounted
- Different color for your selection



MODEL	LDY6012MQ/3+3	LDY9012MQ/6+3	LDY16012MQ/12+4	LDY24012MQ/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	400lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	ø105mm	ø145mm	ø195mm	ø245mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Bubble effect
- Double color Panel series
- Aluminum+PC body
- PMMA cover, High transmittance
- LED SMD 2835 luminous mode
- Surface mounted
- Different color for your selection



MODEL	LDF6012MQ/3+3	LDF9012MQ/6+3	LDF16012MQ/12+4	LDF24012MQ/18+6
Power:	3+3W	6+3W	12+4W	18+6W
Luminous:	400lm	720lm	1200lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	AL+PC	AL+PC	AL+PC	AL+PC
Lamp size:	105x105mm	145x145mm	195x195mm	245x245mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



# LED SLIM PANEL LIGHT



## FEATURE:

- Economic LED Panel series
- Aluminum Body paint with white or black
- High transmittance PS cover
- PMMA/PS Light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDY6001-1	LDY12001-1	LDY18001-1	LDY24001-1
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø120mm	ø170mm	ø220mm	ø300mm
Cut size:	ø105mm	ø155mm	ø205mm	ø285mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Economic LED Panel series
- Aluminum Body paint with white or black
- High transmittance PS cover
- PMMA/PS Light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDF6001-1	LDF12001-1	LDF18001-1	LDF24001-1
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	120x120mm	170x170mm	220x220mm	300x300mm
Cut size:	120x105mm	155x155mm	205x205mm	285x285mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com

# LED GLASS PANEL LIGHT



## FEATURE:

- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable



MODEL	LDY6001G	LDY8001G	LDY12001G	LDY18001G	LDY32001G
Power:	6W	8W	12W	18W	32W
Luminous:	480lm	640lm	960lm	1440lm	2600lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass	AL+Glass	AL+Glass
Lamp size:	ø100mm	ø110mm	ø160mm	ø200mm	ø260mm
Cut size:	ø75mm	ø75mm	ø125mm	ø160mm	ø240mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70



## FEATURE:

- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable



MODEL	LDF6001G	LDF8001G	LDF12001G	LDF18001G	LDF32001G
Power:	6W	8W	12W	18W	32W
Luminous:	480lm	640lm	960lm	1440lm	2600lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass	AL+Glass	AL+Glass
Lamp size:	100x100mm	110x110mm	160x160mm	200x200mm	260x260mm
Cut size:	75x75mm	75x75mm	125x125mm	160x160mm	240x240mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70



# COB GLASS PANEL LIGHT



## FEATURE:

- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED COB backlight luminous mode
- Recessed
- Separated driver, AC85-265V




MODEL	LDY6001G-COB	LDY12001G-COB	LDY18001G-COB
Power:	6W	12W	18W
Luminous:	480lm	960lm	1440lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass
Lamp size:	100mm	160mm	200mm
Cut size:	75mm	125mm	160mm
Light source:	COB	COB	COB
CRI:	70	70	70



## FEATURE:

- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED COB backlight luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDF6001G-COB	LDF12001G-COB	LDF18001G-COB
Power:	6W	12W	18W
Luminous:	480lm	960lm	1440lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass
Lamp size:	100x100mm	160x160mm	200x200mm
Cut size:	75x75mm	125x125mm	160x160mm
Light source:	COB	COB	COB
CRI:	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com

# LED GLASS PANEL LIGHT



## FEATURE:

- **Tri-color dimmable**
- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V



## MODEL

	<b>LDY6001G-Tri</b>	<b>LDY12001G-Tri</b>	<b>LDY18001G-Tri</b>
Power:	6W	12W	18W
Luminous:	480lm	960lm	1440lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass
Lamp size:	ø100mm	ø160mm	ø200mm
Cut size:	ø75mm	ø125mm	ø160mm
Light source:	SMD2835	SMD2835	SMD2835
CRI:	70	70	70



## FEATURE:

- **Tri-color dimmable**
- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V



## MODEL

	<b>LDF6001G-Tri</b>	<b>LDF12001G-Tri</b>	<b>LDF18001G-Tri</b>
Power:	6W	12W	18W
Luminous:	480lm	960lm	1440lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass
Lamp size:	100x100mm	160x160mm	200x200mm
Cut size:	75x75mm	125x125mm	160x160mm
Light source:	SMD2835	SMD2835	SMD2835
CRI:	70	70	70



# LED GLASS PANEL LIGHT



## FEATURE:

- **Remote control dimmable**
- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V



## MODEL

	LDY6001G-RC	LDY12001G-RC	LDY18001G-RC
Power:	6W	12W	18W
Luminous:	480lm	960lm	1440lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass
Lamp size:	ø100mm	ø160mm	ø200mm
Cut size:	ø75mm	ø125mm	ø160mm
Light source:	SMD2835	SMD2835	SMD2835
CRI:	70	70	70



## FEATURE:

- **Remote control dimmable**
- LED Glass Panel series
- Aluminum Frame or Plastic available
- Tempered Glass, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V



## MODEL

	LDF6001G-RC	LDF12001G-RC	LDF18001G-RC
Power:	6W	12W	18W
Luminous:	480lm	960lm	1440lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	AL+Glass	AL+Glass	AL+Glass
Lamp size:	100x100mm	160x160mm	200x200mm
Cut size:	75x75mm	125x125mm	160x160mm
Light source:	SMD2835	SMD2835	SMD2835
CRI:	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com 

# LED BACKLIT PANEL LIGHT



## FEATURE:

- LED Backlit Panel series
- Aluminum body paint with white or black
- PMMA cover, High transmittance
- LED SMD 5730 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable




## MODEL

	LDY12002	LDY18002
Power:	12W	18W
Luminous:	960lm	1440lm
Input Voltage:	85-265V	85-265V
PF:	0.5	0.5
Material:	Aluminum+PMMA	Aluminum+PMMA
Lamp size:	ø160mm	ø180mm
Cut size:	ø130mm	ø160mm
Light source:	SMD5730	SMD5730
CRI:	70	70



## FEATURE:

- LED Backlit Panel series
- Aluminum Body paint with white or black
- PMMA cover, High transmittance
- LED SMD 5730 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable



## MODEL

	LDF12002	LDF18002
Power:	12W	18W
Luminous:	960lm	1440lm
Input Voltage:	85-265V	85-265V
PF:	0.5	0.5
Material:	Aluminum+PMMA	Aluminum+PMMA
Lamp size:	160x160mm	180x180mm
Cut size:	130x130mm	160x160mm
Light source:	SMD5730	SMD5730
CRI:	70	70



# LED BACKLIT PANEL LIGHT



## FEATURE:

- **Tri-color dimmable**
- LED Backlit Panel series
- Aluminum body paint with white or black
- PMMA cover, High transmittance
- LED SMD 5730 backlight luminous mode
- Recessed
- Separated driver, AC85-265V




## MODEL

	<b>LDY12002-Tri</b>	<b>LDY18002-Tri</b>
Power:	12W	18W
Luminous:	960lm	1440lm
Input Voltage:	85-265V	85-265V
PF:	0.5	0.5
Material:	Aluminum+PMMA	Aluminum+PMMA
Lamp size:	ø160mm	ø180mm
Cut size:	ø130mm	ø160mm
Light source:	SMD5730	SMD5730
CRI:	70	70



## FEATURE:

- **Tri-color dimmable**
- LED Backlit Panel series
- Aluminum Body paint with white or black
- PMMA cover, High transmittance
- LED SMD 5730 backlight luminous mode
- Recessed
- Separated driver, AC85-265V



## MODEL

	<b>LDF12002-Tri</b>	<b>LDF18002-Tri</b>
Power:	12W	18W
Luminous:	960lm	1440lm
Input Voltage:	85-265V	85-265V
PF:	0.5	0.5
Material:	Aluminum+PMMA	Aluminum+PMMA
Lamp size:	160x160mm	180x180mm
Cut size:	130x130mm	160x160mm
Light source:	SMD5730	SMD5730
CRI:	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com 



# LED BACKLIT PANEL LIGHT



## FEATURE:

- **Remote control dimmable**
- LED Backlit Panel series
- Aluminum body paint with white or black
- PMMA cover, High transmittance
- LED SMD 5730 backlight luminous mode
- Recessed
- Separated driver, AC85-265V




## MODEL

	LDY12002-RC	LDY18002-RC
Power:	12W	18W
Luminous:	960lm	1440lm
Input Voltage:	85-265V	85-265V
PF:	0.5	0.5
Material:	Aluminum+PMMA	Aluminum+PMMA
Lamp size:	ø160mm	ø180mm
Cut size:	ø130mm	ø160mm
Light source:	SMD5730	SMD5730
CRI:	70	70



## FEATURE:

- **Remote control dimmable**
- LED Backlit Panel series
- Aluminum Body paint with white or black
- PMMA cover, High transmittance
- LED SMD 5730 backlight luminous mode
- Recessed
- Separated driver, AC85-265V



## MODEL

	LDF12002-RC	LDF18002-RC
Power:	12W	18W
Luminous:	950lm	1440lm
Input Voltage:	85-265V	85-265V
PF:	0.5	0.5
Material:	Aluminum+PMMA	Aluminum+PMMA
Lamp size:	160x160mm	180x180mm
Cut size:	130x130mm	160x160mm
Light source:	SMD5730	SMD5730
CRI:	70	70




# LED BACKLIT PANEL LIGHT



## FEATURE:

- LED new backlit panel series
- Aluminum Body paint with white or black
- PC cover, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable



MODEL	LDY7005	LDY16005	LDY22005	LDY30005
Power:	7W	16W	22W	30W
Luminous:	540lm	1200lm	1760lm	2400lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø90mm	ø120mm	ø170mm	ø225mm
Cut size:	ø75mm	ø110mm	ø160mm	ø210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- LED new backlit panel series
- Aluminum Body paint with white or black
- PC cover, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable



MODEL	LDF7005	LDF16005	LDF22005	LDF30005
Power:	7W	16W	22W	30W
Luminous:	560lm	1200lm	1760lm	2400lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	90x90mm	120x120mm	170x170mm	225x225mm
Cut size:	75x75mm	110x110mm	160x160mm	210x210mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com [25]

# LED BACKLIT PANEL LIGHT



## FEATURE:

- LED new backlit panel series
- Aluminum Body paint with white or black
- PC cover, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable




MODEL	LDY6005	LDY9005	LDY12005	LDY15005	LDY18005	LDY24005
Power:	6W	9W	12W	15W	18W	24W
Luminous:	480lm	720lm	960lm	1200lm	1440lm	1920lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø100mm	ø120mm	ø145mm	ø160mm	ø180mm	ø220mm
Cut size:	ø75mm	ø90mm	ø115mm	ø135mm	ø150mm	ø190mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70	70



## FEATURE:

- LED new backlit panel series
- Aluminum Body paint with white or black
- PC cover, High transmittance
- LED SMD 2835 backlight luminous mode
- Recessed
- Separated driver, AC85-265V
- Triac-Dimmable or stepless dimmable



MODEL	LDF6005	LDF9005	LDF12005	LDF15005	LDF18005	LDF24005
Power:	6W	9W	12W	15W	18W	24W
Luminous:	480lm	720lm	960lm	1200lm	1440lm	1920lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	100x100mm	120x120mm	145x145mm	160x160mm	180x180mm	220x220mm
Cut size:	75x75mm	90x90mm	115x115mm	135x135mm	150x150mm	190x190mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com [15]

# LED RECESSED PANEL LIGHT



## FEATURE:

- Modern and elegant
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed , easy to install
- Separated driver, AC85-265V



MODEL	LDY6021	LDY12021	LDY18021	LDY24021
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø90mm	ø145mm	ø175mm	ø225mm
Cut size:	ø70mm	ø125mm	ø155mm	ø205mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



## FEATURE:

- Modern and elegant
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed , easy to install
- Separated driver, AC85-265V



MODEL	LDF60021	LDF12021	LDF18021	LDF24021
Power:	6W	12W	18W	24W
Luminous:	480lm	1200lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	90x90mm	145x145mm	175x175mm	225x225mm
Cut size:	70x70mm	125x125mm	155x155mm	205x205mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70



# LED SURFACE PANEL LIGHT



## FEATURE:

- Modern and elegant design
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- SMD2835chip with high efficiency.
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDY6021M	LDY12021M	LDY18021M	LDY24021M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Cut size:	ø90mm	ø145mm	ø175mm	ø225mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	75	75	75	75



## FEATURE:

- Modern and elegant design
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- SMD2835chip with high efficiency.
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDF6021M	LDF12021M	LDF18021M	LDF24021M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	90x90mm	145x145mm	175x175mm	225x225mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	75	75	75	75



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com

# LED PANEL LIGHT



## FEATURE:

- Ultra design, modern and elegant
- Body paint with satin nickle aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed, easy to install
- Separated driver, AC85-265V



MODEL	LDY6004M	LDY12004M	LDY18004M	LDY24004M	LDY36004M
Power:	6W	12W	18W	24W	36W
Luminous:	480lm	960lm	1440lm	2100lm	2880lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø90mm	ø120mm	ø180mm	ø220mm	ø300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White	White
CRI:	75	75	75	75	75



## FEATURE:

- Ultra design, modern and elegant
- Body paint with satin nickle aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed, easy to install
- Separated driver, AC85-265V



MODEL	LDF6004M	LDF12004M	LDF18004M	LDF24004M	LDF36004M
Power:	6W	12W	18W	24W	36W
Luminous:	480lm	960lm	1440lm	2100lm	2880lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø90mm	ø120mm	ø180mm	ø220mm	ø300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White	White
CRI:	75	75	75	75	75



# LED SURFACE PANEL LIGHT



## FEATURE:

- Modern and elegant
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDY6003M	LDY12003M	LDY18003M	LDY24003M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	110xH28mm	165xH28mm	210xH28mm	284xH28mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	75	75	75	75



## FEATURE:

- Modern and elegant
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDF6003M	LDF12003M	LDF18003M	LDF24003M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	110xH28mm	165xH28mm	210xH28mm	284xH28mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	75	75	75	75



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com [19]

# LED SURFACE PANEL LIGHT



## FEATURE:

- BIG size LED surface Panel series
- Aluminum Body paint with white or black
- High transmittance PS diffuser
- PMMA/PS light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDY40M	LDY50M	LDY60M
Power:	32W	40W	48W
Luminous:	2560lm	3200lm	3840lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.9	0.9	0.9
Material:	Aluminum	Aluminum	Aluminum
Lamp size:	ø400mm	ø500mm	ø600mm
Cut size:	/	/	/
Light source:	SMD2835	SMD2835	SMD2835
CRI:	70	70	70



## FEATURE:

- BIG size LED surface Panel series
- Aluminum Body paint with white or black
- High transmittance PS diffuser
- PMMA/PS light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDF3060M	LDF30120M	LDF4040M	LDF5050M	LDF6060M
Power:	32W	48/72W	32W	40W	48W
Luminous:	2560lm	3840/5760lm	2560lm	3200lm	3840lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.9	0.9	0.9	0.9	0.9
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	300x600mm	300x1200mm	400x400mm	500x500mm	600x600mm
Cut size:	/	/	/	/	/
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70





# LED SURFACE PANEL LIGHT



## FEATURE:

- Modern and elegant design
- Body paint with white aluminum or PC
- High transmittance Polycarbonate cover
- COB chip with high efficiency.
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LD5003	LD8003	LD10003
Power:	15W	30W	40W
Luminous:	1200lm	2400lm	3600lm
Input Voltage:	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5
Material:	Aluminum/PC	Aluminum/PC	Aluminum/PC
Lamp size:	170mm	220mm	300mm
Cut size:	/	/	/
Light source:	COB	COB	COB
CRI:	75	75	75



# FLAT PANEL LIGHT



## FEATURE:

- BIG size LED surface Panel series
- Aluminum Body paint with white or black
- High transmittance PS diffusor
- PMMA/PS light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDF6060/36W	LDF6060/48W
Power:	36W	48W
Luminous:	2880lm	3840lm
Input Voltage:	85-265V	85-265V
PF:	0.9	0.9
Material:	Aluminum	Aluminum
Lamp size:	595x595mm	595x595mm
Cut size:	595x595mm	595x595mm
Light source:	SMD2835	SMD2835
CRI:	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com

# LED PANEL LIGHT



## FEATURE:

- Modern and elegant design
- Body paint with white
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDY6002M	LDY12002M	LDY18002M	LDY24002M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø120mm	ø170mm	ø220mm	ø300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White
CRI:	75	75	75	75



## FEATURE:

- Modern and elegant design
- Body paint with white
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDF6002M	LDF12002M	LDF18002M	LDF24002M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	120x120mm	170x170mm	220x220mm	300x300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White
CRI:	75	75	75	75



# LED SLIM PANEL LIGHT



## FEATURE:

- Economic LED Panel series
- Aluminum Body paint with white or black
- High transmittance PS cover
- PMMA/PS Light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDY3002	LDY5002	LDY7002	LDY12002	LDY15002	LDY18002	LDY20002	LDY28002
Power:	3W	5W	7W	12W	15W	18W	20W	28W
Luminous:	240lm	400lm	560lm	960lm	1200lm	1440lm	1600lm	2240lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø85mm	ø95mm	ø120mm	ø145mm	ø170mm	ø190mm	ø225mm	ø240mm
Cut size:	ø70mm	ø80mm	ø105mm	ø125mm	ø155mm	ø165mm	ø205mm	ø215mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70	70	70	70



## FEATURE:

- Economic LED Panel series
- Aluminum Body paint with white or black
- High transmittance PS cover
- PMMA/PS Light guide plate
- LED SMD 2835 Side-light luminous mode
- Recessed
- Separated driver, AC85-265V



MODEL	LDF3002	LDF5002	LDF8002	LDF12002	LDF16002	LDF20002
Power:	3W	5W	8W	12W	16W	20W
Luminous:	240lm	400lm	640lm	960lm	1280lm	1600lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	85x85mm	100x100mm	120x120mm	150x150mm	180x180mm	217x217mm
Cut size:	70x70mm	85x85mm	105x105mm	133x133mm	165x165mm	195x195mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70	70



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com

# LED SURFACE PANEL LIGHT



## FEATURE:

- Modern and elegant design
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- SMD2835 chip with high efficiency.
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDY6001M	LDY12001M	LDY18001M	LDY24001M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	120mm	170mm	220mm	300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	75	75	75	75



## FEATURE:

- Modern and elegant design
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- SMD2835 chip with high efficiency.
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDF6001M	LDF12001M	LDF18001M	LDF24001M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	120x120mm	170x170mm	220x220mm	300x300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	75	75	75	75



# LED PANEL LIGHT



## FEATURE:

- Ultra design, modern and elegant
- Body paint with satin nickle aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed, easy to install
- Separated driver, AC85-265V



MODEL	LDY3001	LDY4001	LDY6001	LDY9001	LDY12001	LDY15001	LDY18001	LDY24001
Power:	3W	4W	6W	9W	12W	15W	18W	24W
Luminous:	240lm	560lm	540lm	720lm	960lm	1200lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø85mm	ø105mm	ø120mm	ø145mm	ø170mm	ø200mm	ø225mm	ø300mm
Cut size:	ø75mm	ø95mm	ø105mm	ø135mm	ø155mm	ø185mm	ø200mm	ø285mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Color:	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN
CRI:	75	75	75	75	75	75	75	75



## FEATURE:

- Ultra design, modern and elegant
- Body paint with satin nickle aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed, easy to install
- Separated driver, AC85-265V



MODEL	LDF3001	LDF4001	LDF6001	LDF9001	LDF12001	LDF15001	LDF18001	LDF24001
Power:	3W	4W	6W	9W	12W	15W	18W	24W
Luminous:	210lm	320lm	540lm	720lm	960lm	1200lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	85x85mm	105x105mm	120x120mm	145x145mm	170x170mm	200x200mm	225x225mm	300x300mm
Cut size:	75x75mm	95x95mm	105x105mm	135x135mm	155x155mm	185x185mm	200x200mm	285x285mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Color:	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN	WH/SN
CRI:	75	75	75	75	75	75	75	75



ZHONGSHAN

**FACTOLED LIGHTING**

TECHNOLOGY CO., LTD

TEL:0086-760-87556547

www.factoled.com 

# LED PANEL LIGHT



## FEATURE:

- Modern and elegant design
- Body paint with white
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDY6003M	LDY12003M	LDY18003M	LDY24003M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø120mm	ø170mm	ø225mm	ø300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White
CRI:	75	75	75	75



## FEATURE:

- Modern and elegant design
- Body paint with white
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDF6003M	LDF12003M	LDF18003M	LDF24003M
Power:	6W	12W	18W	24W
Luminous:	480lm	960lm	1440lm	2100lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	120x120mm	170x170mm	225x225mm	300x300mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White
CRI:	75	75	75	75



# LED PANEL LIGHT



## FEATURE:

- Modern and elegant design
- Body paint with white
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDY5020M	LDY8020M	LDY16020M	LDY22020M	LDY30020M
Power:	5W	8W	16W	22W	30W
Luminous:	400lm	640lm	1200lm	1760lm	2400lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø78mm	ø88mm	ø145mm	ø170mm	ø225mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White	White
CRI:	75	75	75	75	75



## FEATURE:

- Modern and elegant design
- Body paint with white
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Surface mounted, easy to install
- Separated driver, AC85-265V



MODEL	LDF5020M	LDF8020M	LDF16020M	LDF22020M	LDF30020M
Power:	5W	8W	16W	22W	30W
Luminous:	400lm	640lm	1200lm	1760lm	2400lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	78x78mm	88x88mm	145x145mm	170x170mm	225x225mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
Color:	White	White	White	White	White
CRI:	75	75	75	75	75



# LED PANEL LIGHT



## FEATURE:

- Modern and elegant
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed, easy to install
- Separated driver, AC85-265V




MODEL	LDY5020	LDY8020	LDY16020	LDY22020	LDY30020
Power:	5W	8W	16W	22W	30W
Luminous:	400lm	640lm	1200lm	1760lm	2400lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	ø78mm	ø88mm	ø145mm	ø170mm	ø225mm
Cut size:	ø65mm	ø70mm	ø125mm	ø155mm	ø195mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70



## FEATURE:

- Modern and elegant
- Body paint with white aluminum
- High transmittance Polycarbonate cover
- LED SMD 2835 Backlight luminous mode
- Recessed, easy to install
- Separated driver, AC85-265V



MODEL	LDF5020	LDF8020	LDF16020	LDF22020	LDF30020
Power:	5W	8W	16W	22W	30W
Luminous:	400lm	640lm	1200lm	1760lm	2400lm
Input Voltage:	85-265V	85-265V	85-265V	85-265V	85-265V
PF:	0.5	0.5	0.5	0.5	0.5
Material:	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Lamp size:	78x78mm	88x88mm	145x145mm	170x170mm	225x225mm
Cut size:	65x65mm	70x70mm	125x125mm	155x155mm	195x195mm
Light source:	SMD2835	SMD2835	SMD2835	SMD2835	SMD2835
CRI:	70	70	70	70	70







**Zhongshan Factoled Lighting Technology Co.,Ltd.**

No.5 QingJong Road, Sansha, Henglan Town,  
ZhongShan City, Guangdong Province, China

Tel: 0086-760-23757036

E-mail: [info@factoled.com](mailto:info@factoled.com)

website: [www.factoled.com](http://www.factoled.com)

Alibaba: [www.factoled.en.alibaba.com](http://www.factoled.en.alibaba.com)