





气动千斤顶 **BA-88**
Pneumatic Jack

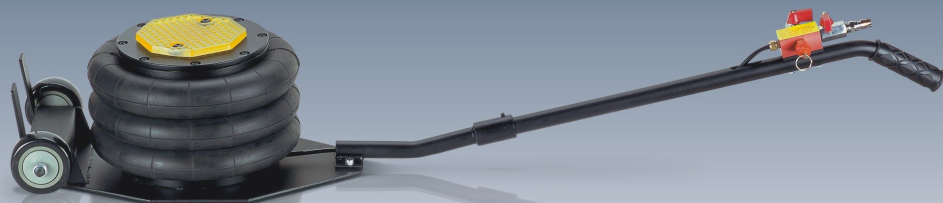


气动千斤顶 **BA-66**
Pneumatic Jack

气动千斤顶 **BA-88-D**
Pneumatic Jack

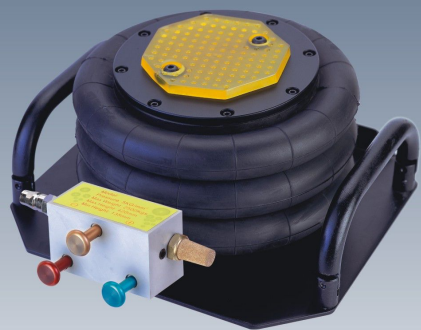



气动千斤顶 **BA-66-D**
Pneumatic Jack

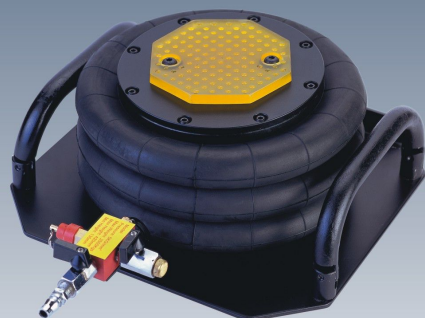


产品以实物为准，如有技术改进恕不另行通知。
If The Objects Disaccord To The Material,
Please Refer To Real Objects Finally .
Any Technical Improvements To The Products,
We Will Not Give A Further Notice.

气动千斤顶

Pneumatic Jack

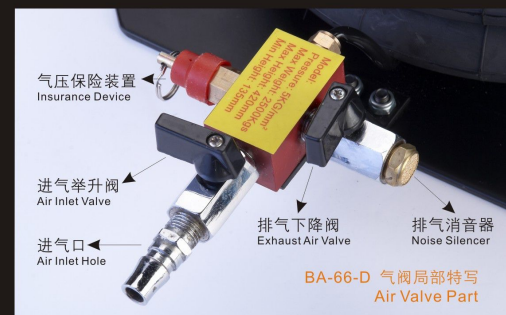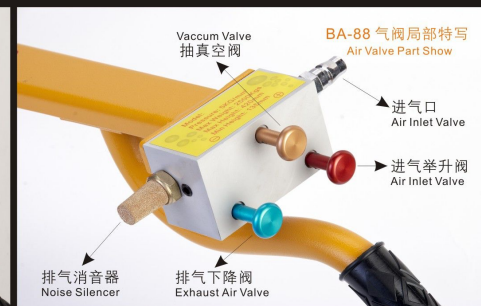

优质牛筋橡胶护车垫
Rubber Cushion

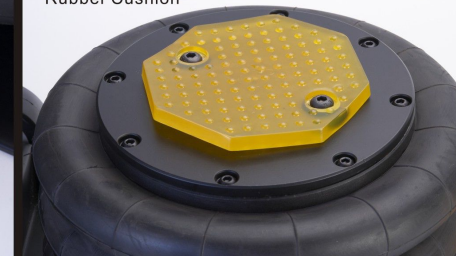

气动千斤顶

Pneumatic Jack

BA-66
BA-88
高耐磨滚轮特写
High Durable Wheels



斜坡环境同样正常工作
Slope Place workable Also

BA-88 最高举升状态
BA-88 Max Lifting State



军工级定心钢套

Military Grade Centering Steel Bushing



防脱掉装置坚决不用卡环,采用整体钢管车出台阶,安全耐用
Never Use Clasp. The Whole Steel Tube Step Turns Off By Lathe, Safe And Durable.

千斤顶的技术参数 Technology Data

总举重 Lift Weight	2500KG
供气压力 Air Pressure	5-10KG/cm ² 145Psi/10Bar/0.5-1Mpa
最低高度 Min Lift Height	135mm/5.3'
最高高度 Max Lift Height	450mm/17.7'
进气连接尺寸 Inlet size	G 1/4
举升时间 Lift Time	25s
工作温度 Work Temperature	-30°C-70°C
净重 Net Weight	20Kg
毛重 Gross Weight	22Kg
装箱尺寸 Packing Size	1530×330×330mm



部份用户
Some of customer