
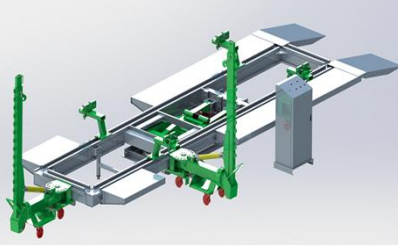

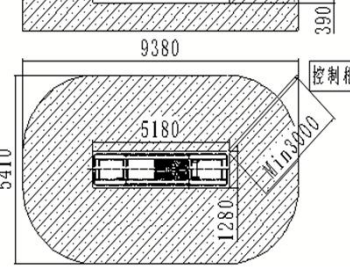






Bench Equipment

No	Item	Specification	
		SY-T 2	SY-T7
1	Product Picture		
2	Working Space Range		
3	Surface Paint	Powder coated	Powder coated
4	Bench dimension (L*W*H) mm	3140*940* (120~1600)	5000*1180* (380~1200)
5	Max. Loading capacity(kg)	2500	4500
6	Cylinder capacity (KN)	100	100
7	Draw Aligner working range	 Multi angle draw aligner, easy security lock	 Multi angle draw aligner for different point straightening
8	Down Pulling system	 Down pulling accessories	 Down puller on bench for easy damaged car anchoring

No	Item	Specification	
		SY-T 2	SY-T7
9	Bench Arm	 <p>Bench arm is helpful for car lifting</p>	 <p>Pillar jack kit is very useful for quick anchoring of the damaged car</p>
10	Clamp specification(mm)	 <p>L: 450 W: 182 H: 158-278</p>	 <p>L: 493 W: 256 H: 341</p>
11	Lowest torque force of clamp	25KN.M	25KN.M
12	Clamp installation	 <p>Single bolt lock for easy and efficient anchoring</p>	 <p>Lock pad fixing for quick installation</p>
13	Bench cylinder lifting capacity(KN)	100 KN	200 KN
14	Drive on system	 <p>Wheel stand</p>	 <p>Removable Ramp on both side of the bench for easy</p>
15	Electrical pump power(KW)	3.0	3.0
16	Voltage	380	380
17	Air pressure range	0.5-0.8MPa	0.5-0.8MPa
18	Equipment weight(kg)	1600	2500