



CRDLIGHT[®]
AN EXPERT IN LED BULB LAMP
LED球泡灯专家

GUANGDONG YANYANG LIGHTING CO.,LTD.
CRDLIGHT OPTOELECTRONICS TECHNOLOGY CO., LTD.

 NO.,105#,NanshanRoad,Jianghai District,Jiangmen City,
Guangdong Province,China

 Tel: +86-750-3808355 Fax:+86-750-3808345

 [Http://www.yanyanglighting.com](http://www.yanyanglighting.com) Zip code: 529000

 admin@yanyanglighting.com



CRDLIGHT[®]
AN EXPERT IN LED BULB LAMP
LED球泡灯专家
(2018-2019)



Yan Yang

GUANGDONG YANYANG LIGHTING CO.,LTD.



About us

关于我们

CRDLIGHT is the company focusing on LED lighting product R&D, manufacturing and sales. The production base is located in Jiangmen City, Guangdong Province, it covers 50,000 square meters of factory area, have 15 sets of aging machines, more than 50 production line. With 20 engineers and over 1000 workers. Our Daily production capacity is 500,000 pcs LED Bulb. We have full LED development teams, including R&D Center, QC and test center. Our products have been exported to more than 30 countries over the world.

CRDLIGHT was founded in 2008, focusing on LED lighting R&D, manufacture and sales for almost 10 years. We own 28 key patents, also have INMETRO, BIS, CE, CB, ROHS, UL, ISO9001 certifications. Thus we are known as "LED BULB expert" in the filed.

卡迪光电科技有限公司，是一家专注于LED产品的设计、研发、制造和销售的企业。生产基地座落于广东省江门市，工厂占地面积超过5万平方米，15台老化测试仪器，50条生产线，拥有20多名工程人员和1000多名员工，日产量达到500000只。拥有完整的LED研发、测试和营销团队，产品出口全球30多个国家。

卡迪光电成立于2008年，经过10年的发展，专注于LED产品的设计、研发、制造和销售，拥有28项核心专利，产品拥有INMETRO, BIS, CE, CB, ROHS, UL, ISO9001等认证，对客户和市场上LED产品的需求了解更加透彻，从而被业内及客户称为“LED球泡专家”。





PRODUCT

Contents

☑ 产品目录

Shops and Household Bulb Series / 店铺和家居灯系列

Bowling series / 玉兰泡系列	P01-04
Handsome Series / 高护帅系列	P05-08
Handsome C Series / 高护帅C系列	P09-10
A bulb series / A泡系列	P11-12
Sound and light control series / 声光控球泡系列	P13-16
Radar sensor series / 雷达感应球泡系列	P17-20
WIFI smart colorful series / WIFI智能七彩系列	P21-24
C37 G45 series / C37 G45系列	P25-26
Calabash series / 金葫芦系列	P27-30
Dragon series / 小白系列	P31-34

Factory and Warehouse Bulb Series / 工厂和仓库灯系

High Power series / 大功率系列	P35-38
Torch series / 火炬系列	P39-40

Outdoor Floodlight series / 户外泛光灯系列

Floodlight series / 泛光灯系列	P41-42
---------------------------	--------

Wireless switch series / 无线开关系列

Wireless switch series / 无线开关系列	P43-44
---------------------------------	--------



Product Features / 产品特点

- Nice look like a bowling;
- Long and large alu-cup good for heat dissipation;
- Wide luminous area.
- 外形像保龄球，线条流畅；
- 导热铝杯长，导热面大；
- 发光面积大。

Applications / 应用场景

Shop ,exhibition, supermarket, household, small warehouse, small factory etc lighting area.
产品要应用在商店、展厅、超市、家居、小型仓库、小型厂房等空间照明。



Bowling series

玉兰泡系列

The new generation of plastic with aluminium material, IC driver.
The most competitive price based on the same quality!

新一代塑包铝材质、恒流恒压设计；
极具性价比！

PC cover: special shape with large luminous area, 90% light transmission rate

Chips: CRI>80 Ra, 120 lm/pc, pass LM80.

Driver: stable IC solution, over 8000hrs lifespan of capacitor

Alu+plastic base: big ratio of heigh/diameter, more slender and stronger heat conducting



180°angle type,20000hrs.
Aluminum with plastic material.

180°发光角度，20000小时寿命。
塑包铝材质工艺。



	6W	=	9W	45W
	12W	=	18W	90W
	20W	=	30W	150W
	30W	=	45W	225W
	40W	=	60W	300W
	50W	=	75W	375W

REPLACE / 替换

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外形尺寸	单箱体积
CRD-B8W	8W	AC100-240V	0.5	>80	680lm	180°	Φ45*120mm	-20~50℃	2 years	E14/E27/B22	47*24.5*26.6cm/100	0.031
CRD-B12W	12W	AC100-240V	0.5	>80	1020lm	180°	Φ58*145mm	-20~50℃	2 years	E27/B22	60*31*31.5cm/100	0.059
CRD-B20W	20W	AC100-240V	0.5	>80	1700lm	180°	Φ75*180mm	-20~50℃	2 years	E27/B22	39.5*39.5*39cm/50	0.061
CRD-B30W	30W	AC100-240V	0.5	>80	2400lm	180°	Φ90*208mm	-20~50℃	2 years	E27/B22	48*38.5*45cm/40	0.083
CRD-B40W	40W	AC100-240V	0.5	>80	3200lm	180°	Φ105*238mm	-20~50℃	2 years	E27	55.5*44.5*51cm/40	0.126
CRD-B50W	50W	AC100-240V	0.5	>80	4000lm	180°	Φ120*278mm	-20~50℃	2 years	E27	63*51*30.5cm/20	0.098



Handsome Series

高护帅系列

Different from traditional round bulb, bigger luminous area and heat dissipation space
 Plastic with aluminum, IC driver
 Great CRI performance, 80~85 Ra

与众不同，发光面及散热空间更大
 塑包铝材质，IC恒流驱动
 显色指数高达80~85 Ra

Product Features / 产品特点

- Cylindrical shape enlarge luminous area and heat dissipation area;
- Nice look match the old aluminum with plastic material;
- Light distribution, more concentrated and effective luminance in applications;
- Can be combined with the lamp and cover, which can control the beam angle, more wide-range in application.
- 柱形发光面积大，散热面大；
- 外观比传统塑包铝更出众；
- 照度更广；
- 灯跟灯罩可自由组合，只要加上灯罩，就能使光线聚集，使用用途更广。

Applications / 场景应用

Shop ,exhibition, supermarket, household, small warehouse, small factory etc lighting area.
 产品要应用在商店、展厅、超市、家居、小型仓库、小型厂房等空间照明。



PC cover: cylindrical shape enlarge luminous area, transmission > 90%

Chips: CRI>80 Ra, 120 lm/pc, pass LM80.
PCB: 1. Bigger PCB;

2. PCB connect with the aluminum cup directly which is better for heat conducting.

Driver: stable IC solution, over 8000hrs lifespan of capacitor

Alu+plastic base: bigger inner space reduce working temperature, longer lifespan



180° angle type, 20000hrs.

Aluminum with plastic material.

180°发光角度, 20000小时寿命。

塑+铝材质工艺。



5W =	8W	38W
9W =	14W	68W
13W =	20W	98W
18W =	27W	135W
28W =	42W	210W
38W =	57W	285W
48W =	72W	360W

REPLACE / 替代

CCT色温: 3000/4000/6500K


型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外箱尺寸	单箱体积
CRD-H5W	5W	AC100-240V	0.5	>80	450lm	180°	Φ50*99mm	-20~50℃	2 years	E14/E27/B22	52*26.5*22.5cm/100	0.031
CRD-H9W	9W	AC100-240V	0.5	>80	810lm	180°	Φ60*119mm	-20~50℃	2 years	E27/B22	62*31.5*26.5cm/100	0.052
CRD-H13W	13W	AC100-240V	0.5	>80	1170lm	180°	Φ70*129mm	-20~50℃	2 years	E27/B22	74*37*28.5cm/100	0.078
CRD-H18W	18W	AC100-240V	0.5	>80	1620lm	180°	Φ80*145mm	-20~50℃	2 years	E27/B22	43*43*31.5cm/50	0.058
CRD-H28W	28W	AC100-240V	0.5	>80	2520lm	180°	Φ100*185mm	-20~50℃	2 years	E27/B22	53.5*42.5*41.5cm/40	0.094
CRD-H38W	38W	AC100-240V	0.5	>80	3230lm	180°	Φ115*205mm	-20~50℃	2 years	E27	60.5*49*45.5cm/40	0.135
CRD-H48W	48W	AC100-240V	0.5	>80	4080lm	180°	Φ125*235mm	-20~50℃	2 years	E27	66*27.1*51cm/20	0.091

PC cover: special shape with large luminous area,
90% light transmission rate

Chips: CRI>80 Ra
120 lm/pc, pass LM80.

Die-casting aluminum,
fast heat dissipation,
lower led chip temperature

Driver: stable IC solution,
over 8000hrs lifespan of capacitor

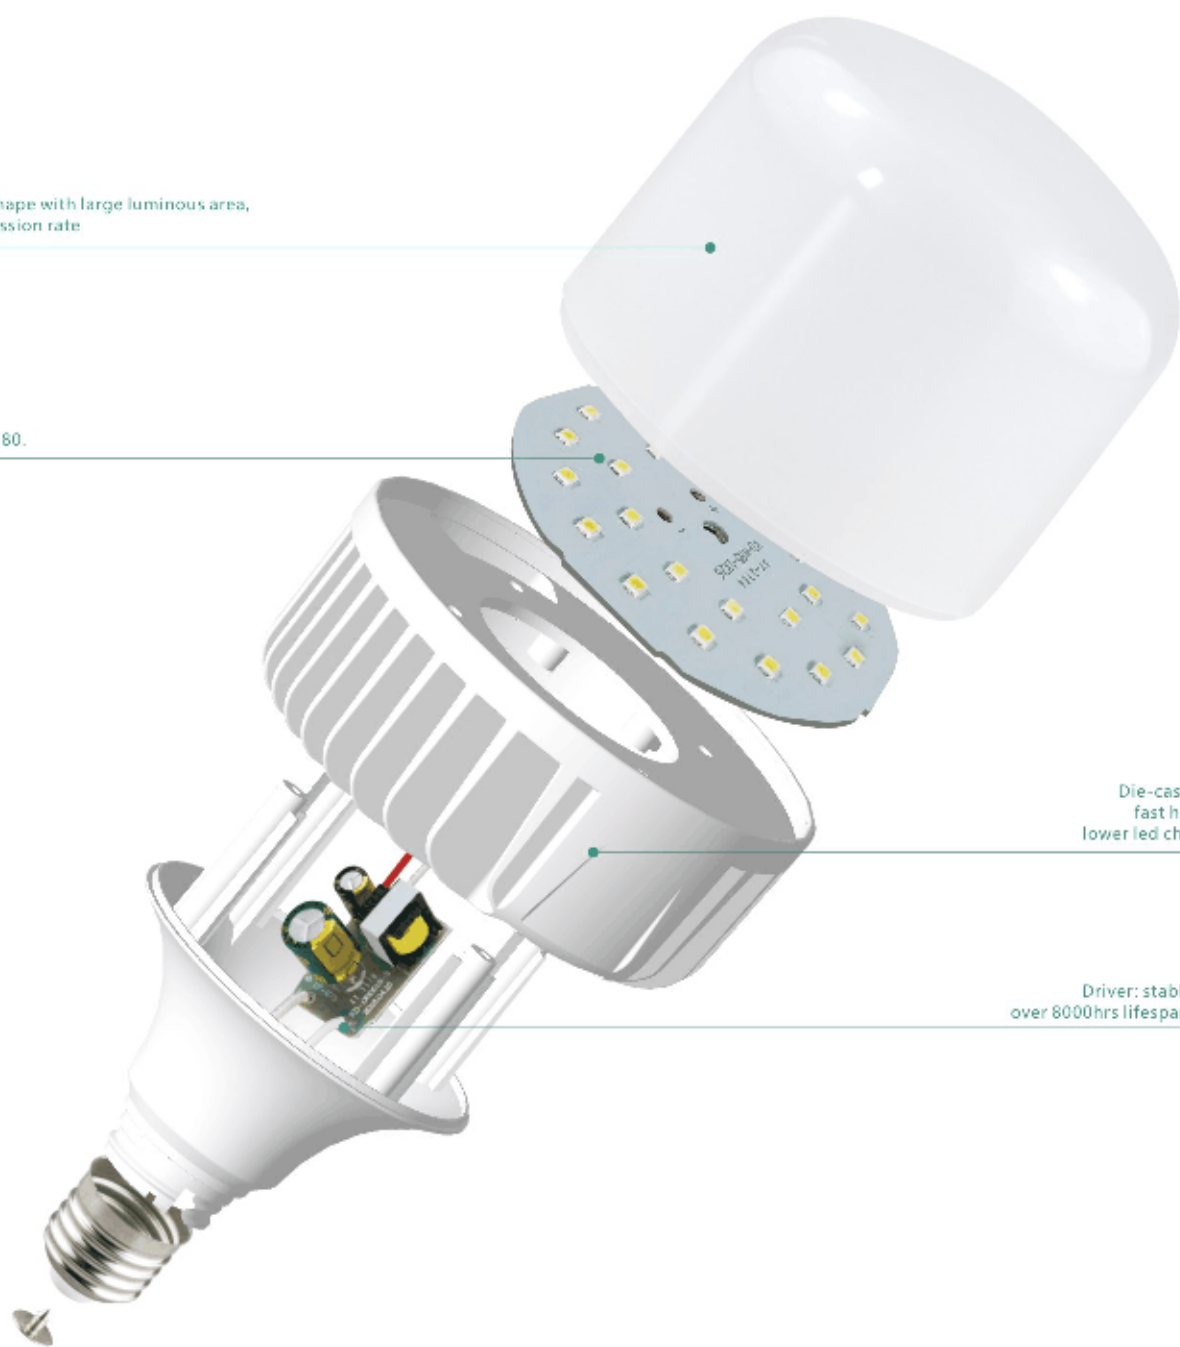

180° angle type, 20000hrs.
Die-cast aluminum material.

180°发光角度, 20000小时寿命。
压铸铝工艺。



	10W	=	18W	70W
	15W	=	25W	100W
	20W	=	35W	150W
	30W	=	50W	260W
	40W	=	60W	300W
	50W	=	80W	380W
	60W	=	90W	450W

REPLACE / 替代

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-HC10W	10W	AC100-220V	0.5	>80	900lm	180°	Φ61*116mm	-20~50°C	2 years	E27/B22	62*31.5*26.5cm/100	0.052
CRD-HC15W	15W	AC100-220V	0.5	>80	1350lm	180°	Φ71*128mm	-20~50°C	2 years	E27/B22	74*37*28.5cm/100	0.078
CRD-HC20W	20W	AC100-220V	0.5	>80	1800lm	180°	Φ81*180mm	-20~50°C	2 years	E27/B22	43*43*31.5cm/50	0.058
CRD-HC30W	30W	AC100-220V	0.5	>80	1800lm	180°	Φ101*178mm	-20~50°C	2 years	E27/B22	53.5*42.5*41.5cm/40	0.094
CRD-HC40W	40W	AC100-220V	0.5	>80	3500lm	180°	Φ116*201mm	-20~50°C	2 years	E27	61*49*43.5cm/40	0.130
CRD-HC50W	50W	AC100-220V	0.5	>80	4300lm	180°	Φ126*223mm	-20~50°C	2 years	E27	66*53*25cm/20	0.087
CRD-HC60W	60W	AC100-220V	0.5	>80	5200lm	180°	Φ143*236mm	-20~50°C	2 years	E27	74.5*60*26cm/20	0.116

PC cover: transmissinon >90%

Chips: CRI>80 Ra
120 lm/pc, pass LM80.

Driver: stable IC solution,
over 8000hrs lifespan of capacitor

Alu+plastic base: better heat conducting



Product Features / 产品特点

- No flicker, healthier and comfortable far eyes and the light environment;
- The life time is 30 times longer than incandescent lamp;
- 8-10 times energy saving than traditional incandescent lamp and CFLs;
- Full power, ultra brightness.
- 灯光无闪烁, 更护眼, 环境更舒适;
- 寿命是白炽灯的30倍;
- 比传统白炽灯节能8-10倍;
- 足功率, 亮度高。



270°angle type, 20000hrs.
Aluminum with plastic material.
270°发光角度, 20000小时寿命。
铝包塑料工艺。

5W	=	8W	35W
7W	=	11W	49W
9W	=	14W	63W
12W	=	18W	84W
15W	=	23W	105W
18W	=	27W	126W
22W	=	33W	154W

REPLACE / 替换

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外箱尺寸	单箱体积
CRD-A5W	5W	AC100-240V	0.5	>80	450lm	270°	Φ53*103mm	-20~50°C	2 years	E27/B22	56*28.5*23cm/100	0.037
CRD-A7W	7W	AC100-240V	0.5	>80	630lm	270°	Φ59*112mm	-20~50°C	2 years	E27/B22	62*31.5*25cm/100	0.049
CRD-A9W	9W	AC100-240V	0.5	>80	810lm	270°	Φ59*112mm	-20~50°C	2 years	E27/B22	62*31.5*25cm/100	0.049
CRD-A12W	12W	AC100-240V	0.5	>80	1080lm	270°	Φ59*118mm	-20~50°C	2 years	E27/B22	62*31.5*26.5cm/100	0.052
CRD-AB12W	12W	AC100-240V	0.5	>80	1080lm	270°	Φ65*125mm	-20~50°C	2 years	E27/B22	62*31.5*26.5cm/100	0.052
CRD-A15W	15W	AC100-240V	0.5	>80	1350lm	270°	Φ70*130mm	-20~50°C	2 years	E27/B22	72*36.5*29cm/100	0.076
CRD-A18W	18W	AC100-240V	0.5	>80	1620lm	270°	Φ80*145mm	-20~50°C	2 years	E27/B22	41.5*41.5*32cm/50	0.055
CRD-A22W	22W	AC100-240V	0.5	>80	1980lm	270°	Φ94*169mm	-20~50°C	2 years	E27/B22	49*49*36.5cm/50	0.064

Product Features / 产品特点

Automatically turn on /off with sound and light;
Energy saving, environmental protection, safety and reliability.
根据光线的变化和声音来控制灯泡的开启/关闭;
节能环保, 安全、可靠。

Applications / 场景应用

External porches, walkways, paths and patios etc lighting area.
产品要应用在外部门廊、走道、小径和天井等空间照明。



Sound and light control series
声光控球泡系列

PC cover: transmisssion >90%


Chips: CRI>80 Ra
120 lm/pc, pass LM80.

Sound sensor

Light sensitive resistance

Driver: stable IC solution,
over 8000hrs lifespan of capacitor

Alu+plastic base: better heat conducting

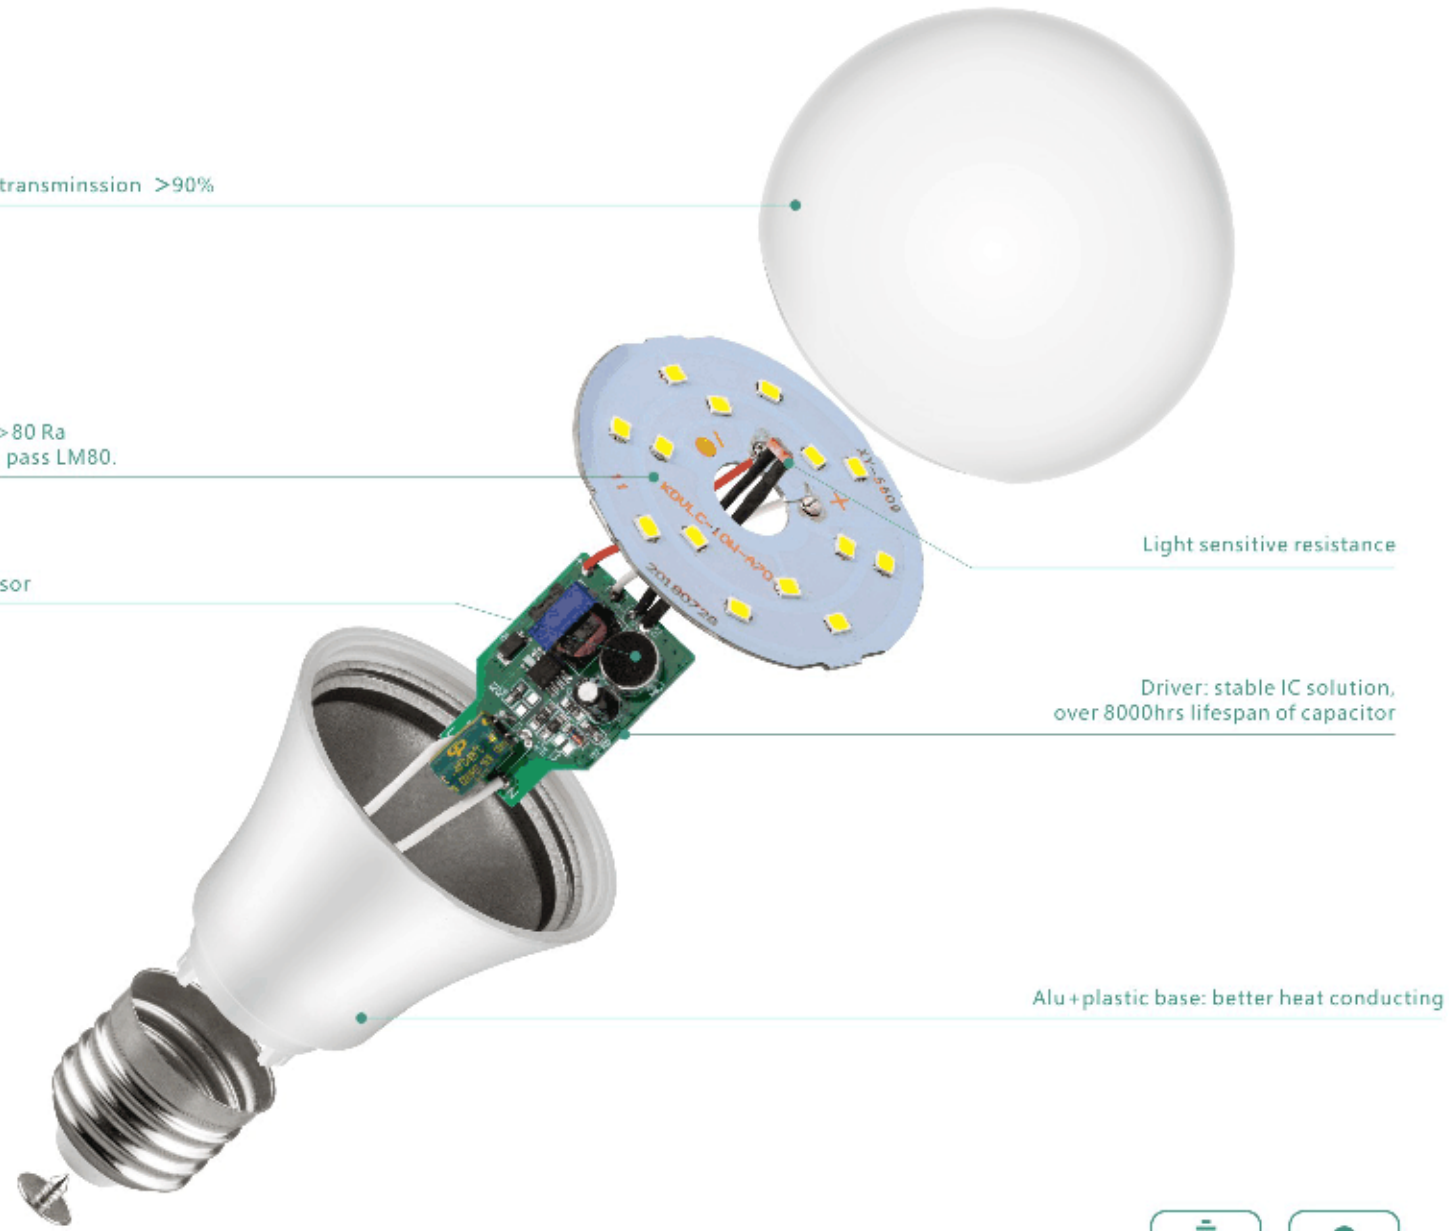

5W	=	8W	35W
10W	=	14W	63W

REPLACE / 替换

270° angle type, 20000hrs.
Aluminum with plastic material.
270°发光角度, 20000小时寿命。
塑包铝材质工艺。



CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-AS5W	5W	AC100-240V	0.5	>80	500lm	270°	Φ60*112mm	-20~50℃	2 years	E27/B22	62*31.5*25cm/100	0.049
CRD-AS10W	10W	AC100-240V	0.5	>80	1000lm	270°	Φ70*130mm	-20~50℃	2 years	E27/B22	72*36.5*29cm/100	0.076

Product Features / 产品特点

Automatic on when someone moves in detection range, turn off after 30 seconds when there is no movement;

Energy saving, environmental protection, safety and reliability.

当有人在探测范围内移动时，自动开启；当没有移动时，30秒后熄火；

节能环保，安全、可靠。


Applications / 场景应用

External porches, walkways, paths and patios etc lighting area.

产品要应用在外部门廊、走道、小径和天井等空间照明。



Radar sensor series
雷达感应球泡系列

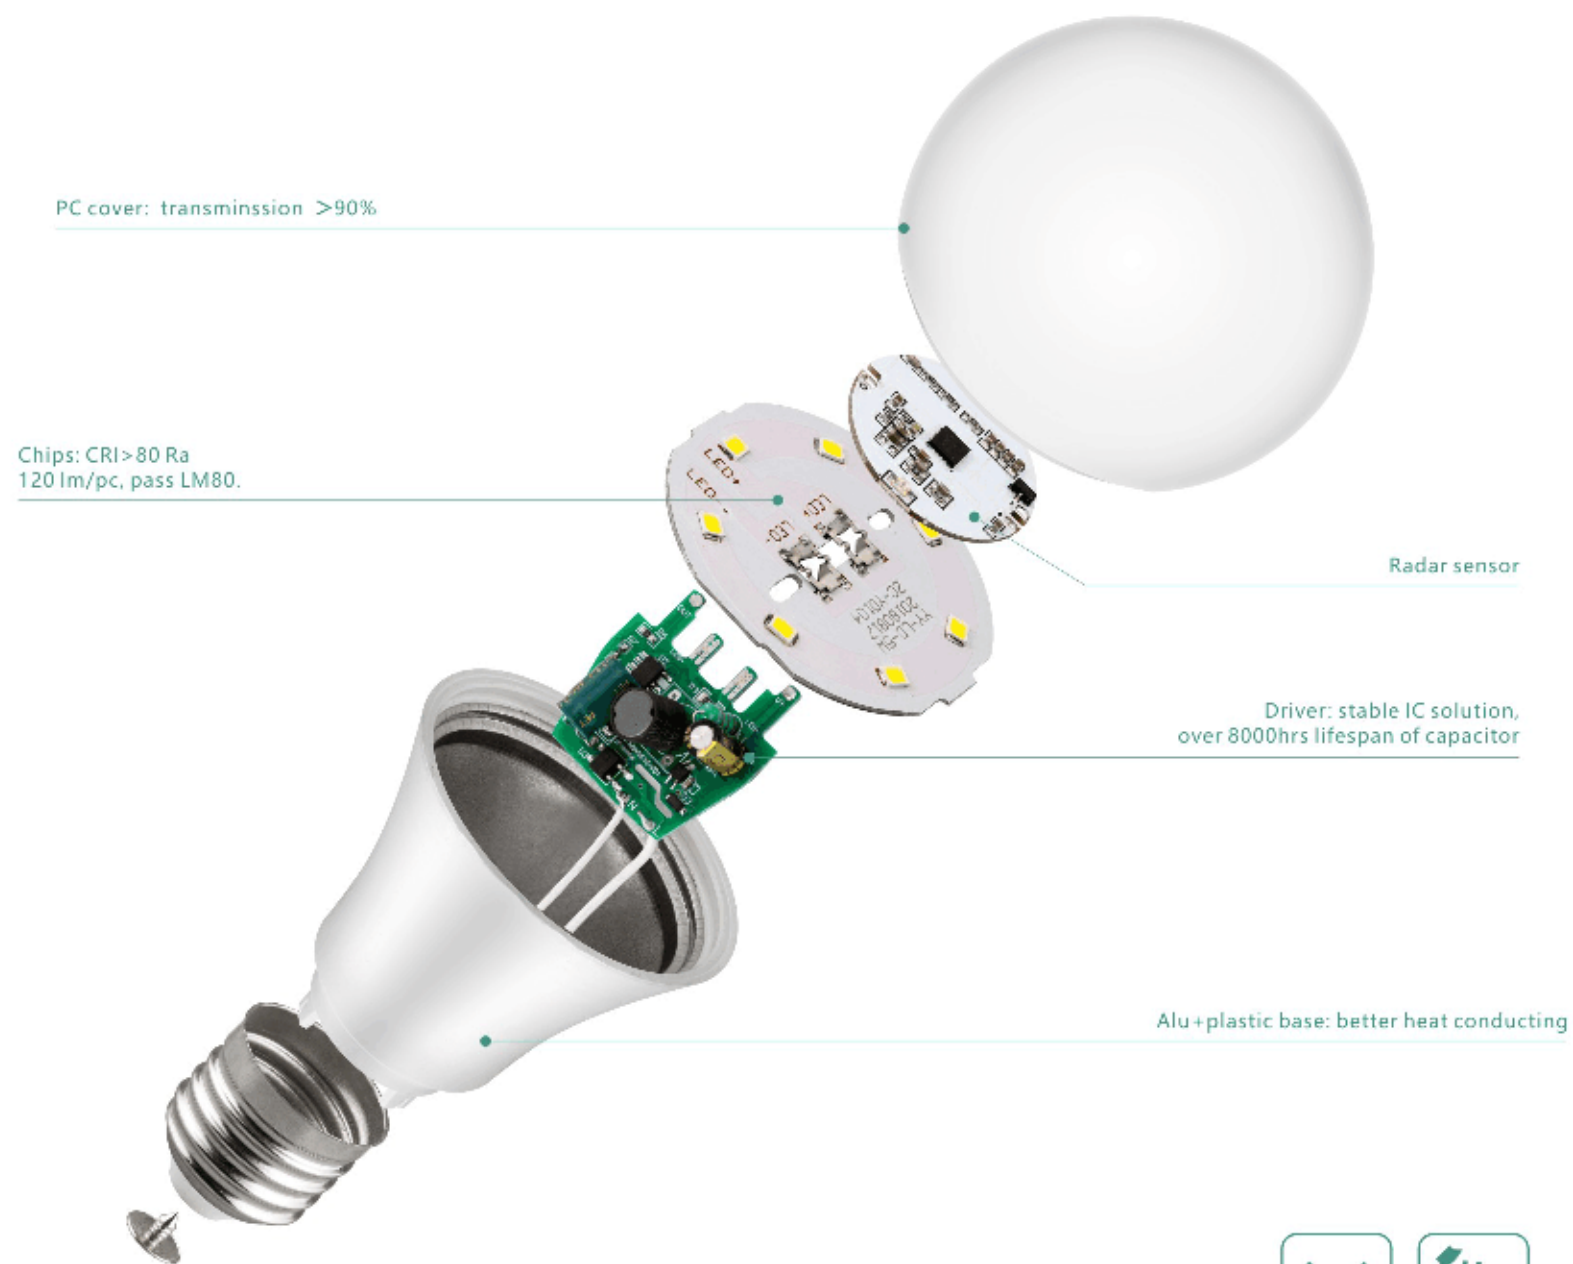

5W	=	8W	35W
10W	=	14W	63W

REPLACE / 替换

270° angle type, 20000hrs.

Aluminum with plastic material.

270°发光角度，20000小时寿命。

塑包铝材质工艺。



CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-AR5W	5W	AC100-240V	0.5	>80	500lm	270°	Φ60*112mm	-20~50°C	2 years	E27/B22	62*31.5*25cm/100	0.049
CRD-AR10W	10W	AC100-240V	0.5	>80	1000lm	270°	Φ70*130mm	-20~50°C	2 years	E27/B22	72*36.5*29cm/100	0.076



WiFi smart colorful series

WiFi智能七彩球泡系列



Product Features / 产品特点

Smart LED bulbs can be controlled by your smart phone, using a free app(App:SMART LIFE); Support all kind of colors adjust with your smart phone.
智能LED灯泡可以通过你的智能手机控制，可以使用免费的应用程序(App:智能生活); 支持手机变换七彩。

Applications / 场景应用

Household lighting area.
产品要应用在家居照明。



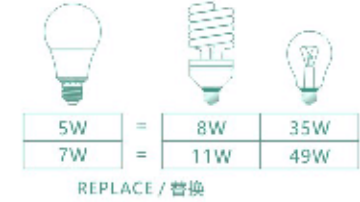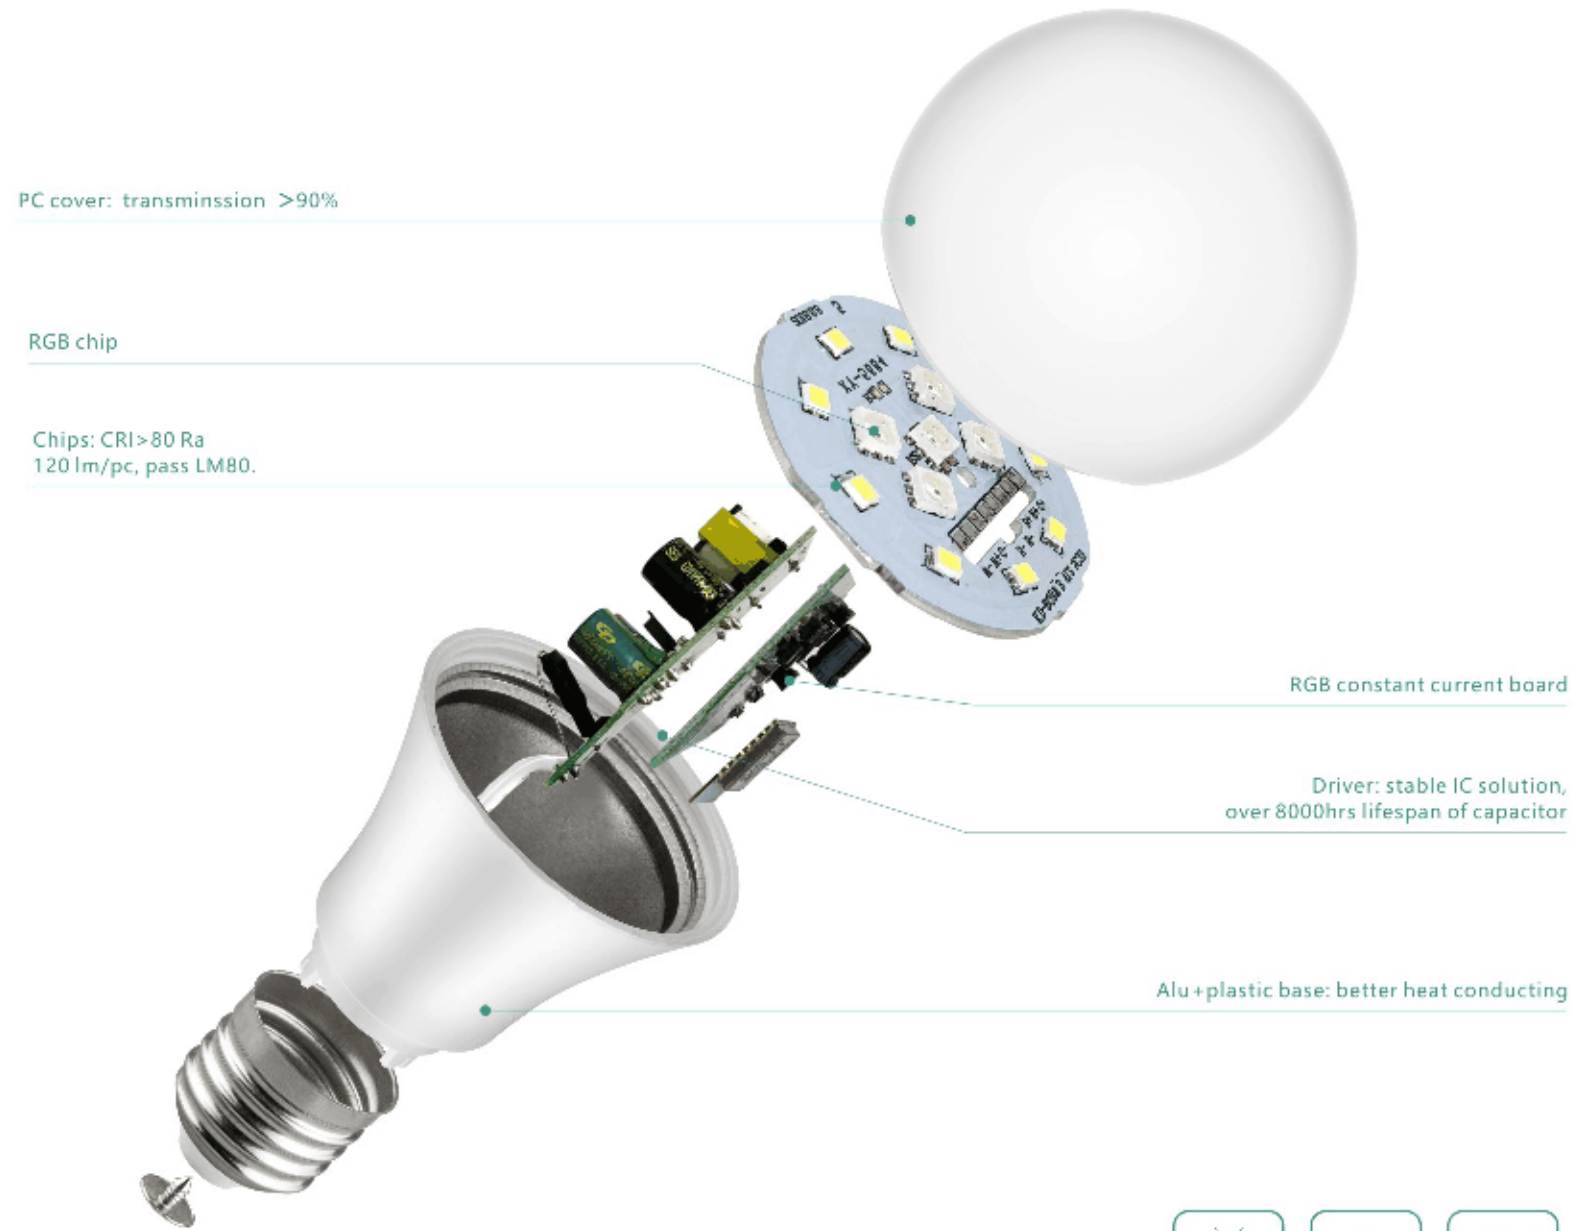

270°angle type,20000hrs.
Aluminum with plastic material.
270°发光角度，20000小时寿命。
塑包铝材质工艺。



CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-AW5W	5W	AC100-240V	0.5	>80	450lm	270°	Φ60*118mm	-20~50℃	2 years	E27/B22	62*31.5*26.5cm/100	0.052
CRD-AW7W	7W	AC100-240V	0.5	>80	580lm	270°	Φ60*118mm	-20~50℃	2 years	E27/B22	62*31.5*26.5cm/100	0.052

PC cover with more than 90% reflection


Chips: CRI > 80 Ra
120 lm/pc, pass LM80.

Stable IC solution driver

Anti-fire PP



C37/G45 series
C37/G45系列

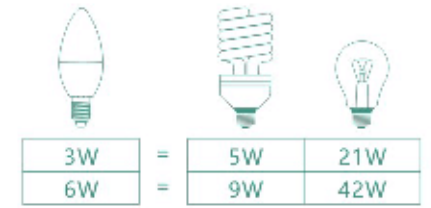

REPLACE / 替换



180° angle type, 20000hrs.
Aluminum with plastic material.
180°发光角度, 20000小时寿命。
塑包铝材质工艺。

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外箱尺寸	单箱体积
CRD-AC3W	3W	AC100-240V	0.5	>80	270lm	180°	Φ37*100mm Φ37*125mm	-20~50°C	2 years	E27/B22/E14	39*20.5*22.5cm/100 39*20.5*28cm/100	0.040
CRD-AC6W	6W	AC100-240V	0.5	>80	540lm	180°	Φ37*100mm Φ37*125mm	-20~50°C	2 years	E27/B22/E14	39*20.5*22.5cm/100 39*20.5*28cm/100	0.040
CRD-AG3W	3W	AC100-240V	0.5	>80	270lm	180°	Φ45*82mm	-20~50°C	2 years	E27/B22/E14	48*25*18.5cm/100	0.049
CRD-AG6W	6W	AC100-240V	0.5	>80	540lm	180°	Φ45*82mm	-20~50°C	2 years	E27/B22/E14	48*25*18.5cm/100	0.049



Calabash series

金葫芦系列

Blow PC molding design, upgraded version compared with glass design
Air convection heat dissipation system
吹罩设计,秒杀市场同类产品
管道空气对流散热设计

Product Features / 产品特点

- Driver is separated from chip, chip's heat can't affect the driver;
- Square-round cover design enlarge luminous area(+12%);
- Special heat conduction system reduce the working temperature, makes the temperature of lamp lower,ensure the longer lifetime of product.
- 驱动独立,整灯的温度控制效果更佳
- 方圆罩,发光面增加12%
- 专门的导热通道(中间铝件热对流),降低整灯的工作温度,确保产品使用寿命长

Applications / 应用场景

Shop ,exhibition, supermarket, household, small warehouse, small factory etc lighting area.
产品要应用在商店、展厅、超市、家居、小型仓库、小型厂房等空间照明。




PC cover: Round-square shape increase 12% luminous area, transmission > 90%

Chips: CRI > 80 Ra, 120 lm/pc, pass LM80.

Heat sink: Aluminum with special channel design, better for heat conduction

Driver: stable IC solution, over 8000hrs lifespan of capacitor

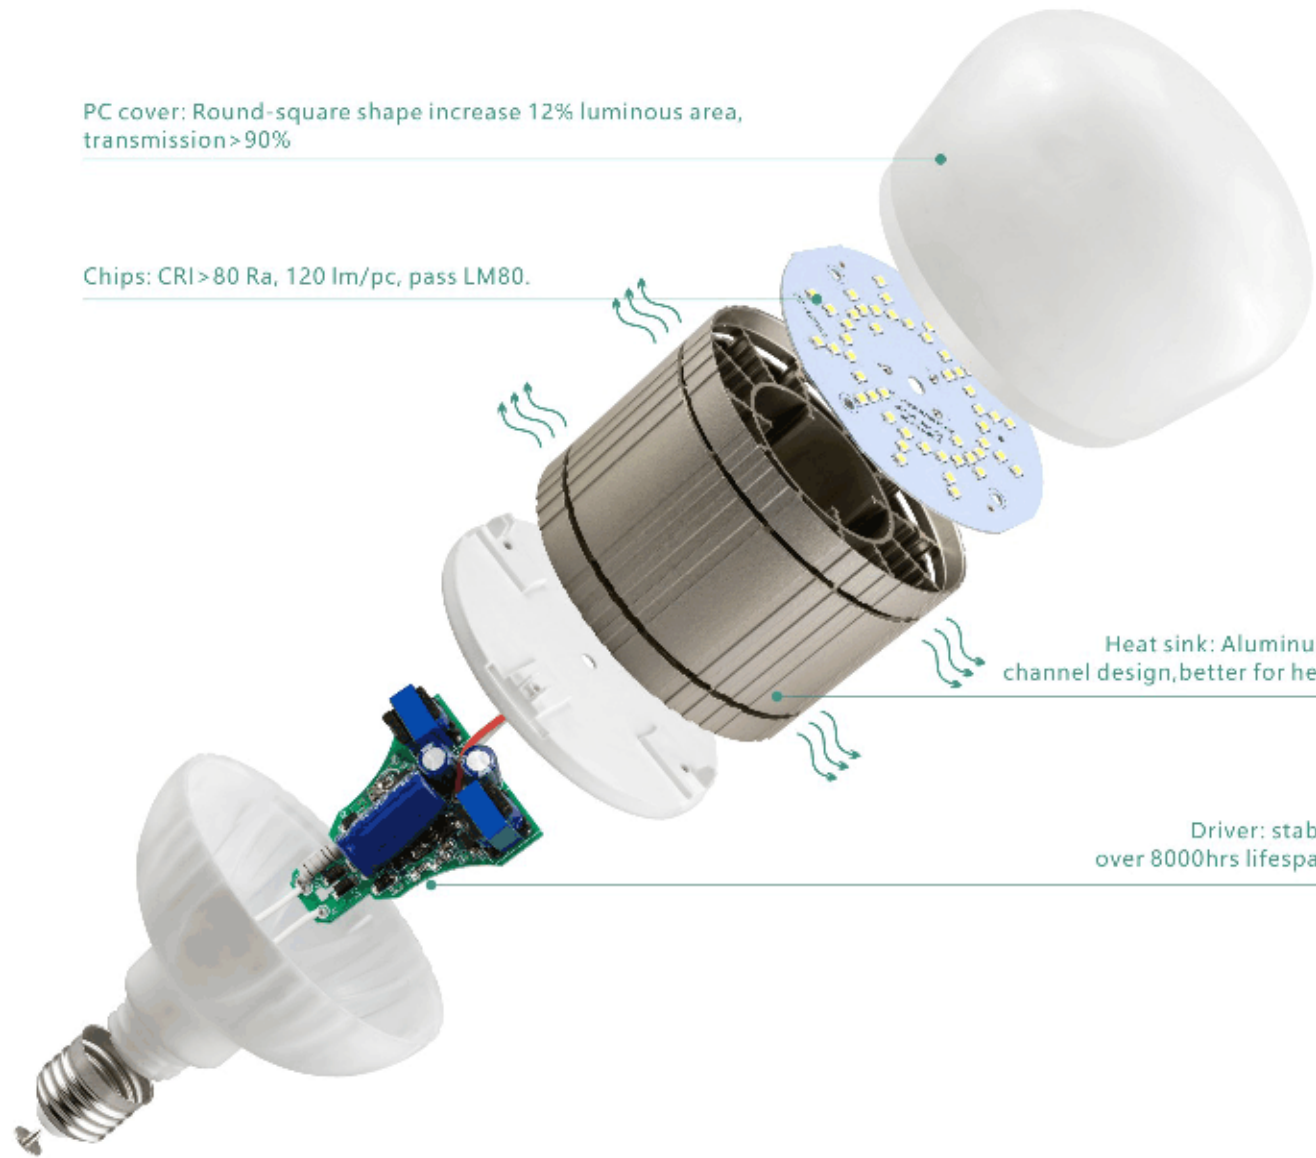

230° angle type, 20000hrs.
230°发光角度, 20000小时寿命。



13W =	19W	96W
18W =	27W	135W
24W =	36W	180W
30W =	45W	225W
40W =	60W	300W
50W =	75W	375W

REPLACE / 替换

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-C13W	13W	AC100-240V	0.5	>80	1170lm	230°	Φ84*146mm	-20~50°C	2 years	E27/B22	84.5*43*32cm/100	0.116
CRD-C18W	18W	AC100-240V	0.5	>80	1620lm	230°	Φ84*159mm	-20~50°C	2 years	E27/B22	84.5*43*34.5cm/100	0.125
CRD-C24W	24W	AC100-240V	0.5	>80	2160lm	230°	Φ94*180mm	-20~50°C	2 years	E27/B22	50*50*40.5cm/50	0.101
CRD-C30W	30W	AC100-240V	0.5	>80	2700lm	230°	Φ94*202mm	-20~50°C	2 years	E27/B22	50*50*44cm/50	0.11
CRD-C40W	40W	AC100-240V	0.5	>80	3600lm	230°	Φ105*224mm	-20~50°C	2 years	E27	66.5*55.5*25.5cm/30	0.094
CRD-C50W	50W	AC100-240V	0.5	>80	4500lm	230°	Φ105*244mm	-20~50°C	2 years	E27	66.5*55.5*27cm/30	0.1



Dragon series

小白系列

The new generation of plastic with aluminium material, IC driver.
The most competitive price based on the same quality!

新一代塑包铝材质、恒流恒压设计；
极具性价比！

Product Features / 产品特点

- Wide application with mini-size;
- Its mini-size shape replace 2U energy-saving lamp, incandescent lamp, halogen lamp;
- With heat conductive plastic which can achieve the purpose of lowering the temperature and effectively ensure the lamp's life time.
- 外形小巧，应用范围广；
- 小巧的外形替代2U节能灯，白炽灯，卤素；
- 导热塑料，达到降低温度的目的，有效地保证了整灯的寿命。

Applications / 应用场景

Shop ,exhibition, supermarket, household, small warehouse, small factory etc lighting area.
产品要应用在商店、展厅、超市、家居、小型仓库、小型厂房等空间照明。



PC cover: long column shape enlarge luminous area, transmission > 90%

Chips: CRI > 80 Ra, 120 lm/pc, pass LM80.

Driver: stable IC solution, over 8000hrs lifespan of capacitor

Alu+plastic base: Heat conducting PBT, lower working temperature, longer lifespan.

180° angle type, 20000hrs.

Aluminum with plastic material.

180°发光角度, 20000小时寿命。

塑包铝材质工艺。



	6W	=	9W	45W
	9W	=	14W	68W
	12W	=	18W	90W
	15W	=	23W	113W

REPLACE / 替换

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-D6W	6W	AC100-240V	0.5	>80	540lm	180°	Φ37*123mm	-20~50℃	2 years	E27/B22	39*39*14.5cm/100	0.022
CRD-D9W	9W	AC100-240V	0.5	>80	900lm	180°	Φ37*123mm	-20~50℃	2 years	E27/B22	39*39*14.5cm/100	0.022
CRD-D12W	12W	AC100-240V	0.5	>80	1080lm	180°	Φ45*142mm	-20~50℃	2 years	E27/B22	47*47*16.5cm/100	0.036
CRD-D15W	15W	AC100-240V	0.5	>80	1350lm	180°	Φ45*142mm	-20~50℃	2 years	E27/B22	47*47*16.5cm/100	0.036



High Power series

大功率系列

Warehouse category pioneer and founder.
Fans temperature control device.
Suitable for 6 to 8 meters area like street stores,shops.
Can replace the 120W/150W/225W/300W CFLs.


厂房灯品类开创者；
内置自降温风扇装置；
适用于6-8米的沿街店面、商铺等照明场所；
完全替代120W、150W、225W、300W节能灯。

Product Features / 产品特点

- Cylindrical shape enlarge luminous area and heat dissipation area;
- Nice look match the old aluminum with plastic material;
- Light distribution,more concentrated and effective luminance in applications;
- Can be combined with the lamp and cover ,which can control the beam angle,more wide-range in application.
- 柱形发光面积大，散热面大；
- 外观比传统塑包铝更出众；
- 照度更广；
- 灯跟灯罩可自由组合，只要加上灯罩，就能使光线聚集，使用用途更广。

Applications / 场景应用

Workshop,warehouse,mine,supermarket,exhibition hall,garage,gasoline station,design park and other large space lighting.
产品主要应用在厂房、仓库、矿场、展厅、车库、加油站、超市、设计园区等大型空间照明。

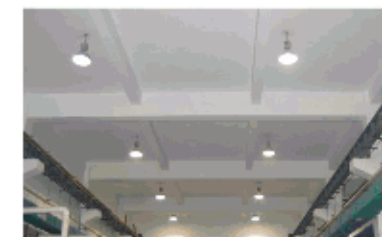

PC cover with more than 90% reflection


Chips with CRI>80 Ra, 120 lm/pc, pass LM80

Alu Heatsink

Fans

Stable IC solution driver

Anti-fire PP

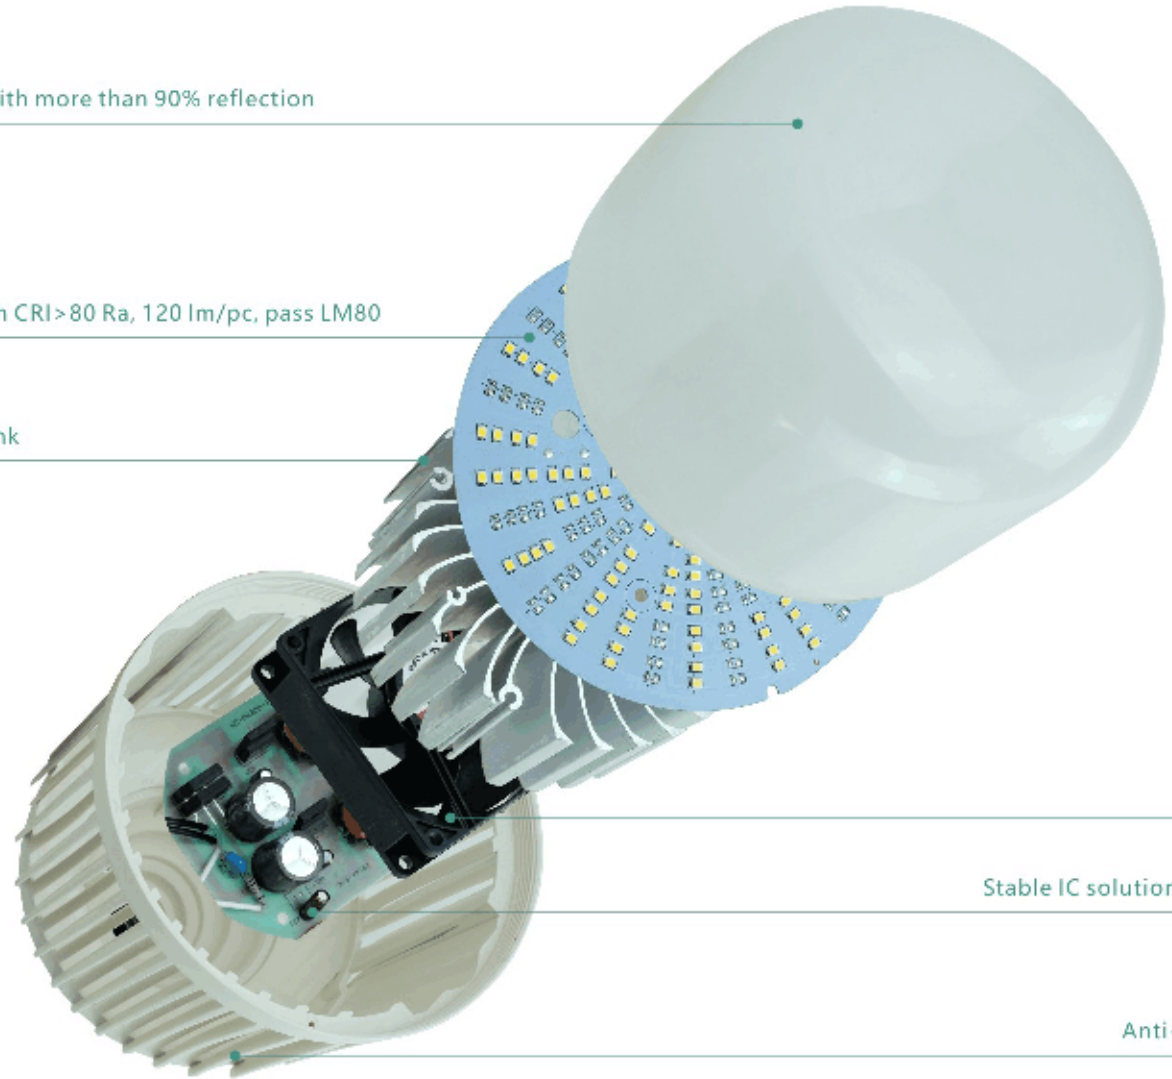

180° angle type, 20000hrs.
Aluminum with plastic material.

180°发光角度, 20000小时寿命。
塑+铝材质工艺。



80W	120W	600W
100W	150W	750W
150W	225W	1125W
200W	300W	1500W

REPLACE / 替代



CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外箱尺寸	单箱体积
CRD-HP80W	80W	AC100-240V	0.7	>80	6160lm	180°	142*296mm	-20~50°C	2 years	E27/E40	74*60.5*30cm/20	0.134
CRD-HP100W	100W	AC100-240V	0.7	>80	7700lm	180°	142*296mm	-20~50°C	2 years	E27/E40	74*60.5*30cm/20	0.134
CRD-HP150W	150W	AC100-240V	0.7	>80	11550lm	180°	160*323mm	-20~50°C	2 years	E27/E40	84.5*51.5*33cm/15	0.144
CRD-HP200W	200W	AC100-240V	0.7	>80	15400lm	180°	160*323mm	-20~50°C	2 years	E27/E40	84.5*51.5*33cm/15	0.144

PC cover: special shape with large luminous area,
90% light transmission rate

Chips: CRI > 80 Ra
120 lm/pc, pass LM80.

Alu Heatsink

Anti-fire PBT

E40



180° angle type, 20000hrs.

Aluminum with plastic material.

180°发光角度, 20000小时寿命。

塑+铝材质工艺。



50W	90W	300W
80W	120W	380W
100W	200W	450W

REPLACE / 替代

E40

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	灯头	外包装尺寸	单箱体积
CRD-HT50W	50W	AC100-220V	0.5	>80	4300lm	180°	Φ145*220mm	-20~50℃	2 years	E27/E40	14.8*14.8*22.8cm/20	0.113
CRD-HT80W	80W	AC100-220V	0.5	>80	6500lm	180°	Φ165*245mm	-20~50℃	2 years	E27/E40	16.8*16.8*25.3cm/20	0.159
CRD-HT100W	100W	AC100-220V	0.5	>80	8000lm	180°	Φ195*266mm	-20~50℃	2 years	E27/E40	19*19*27.4cm/12	0.144




FLOODLIGHT series

泛光灯系列

Product Features / 产品特点

- High brightness, low consumption, environment protection;
- Lighting protection, surge resistance;
- Diamond lenses are eye proof;
- Double glue sink, pour into glue, better for waterproof, which can reach to be IP66;
- Unique design, patented product.
- 高亮度、低能耗，绿色环保；
- 防雷击，抗浪涌；
- 钻石透镜防炫目；
- 双胶槽，灌胶工艺，更好的防水，可达到IP66；
- 外形独特，专利产品。

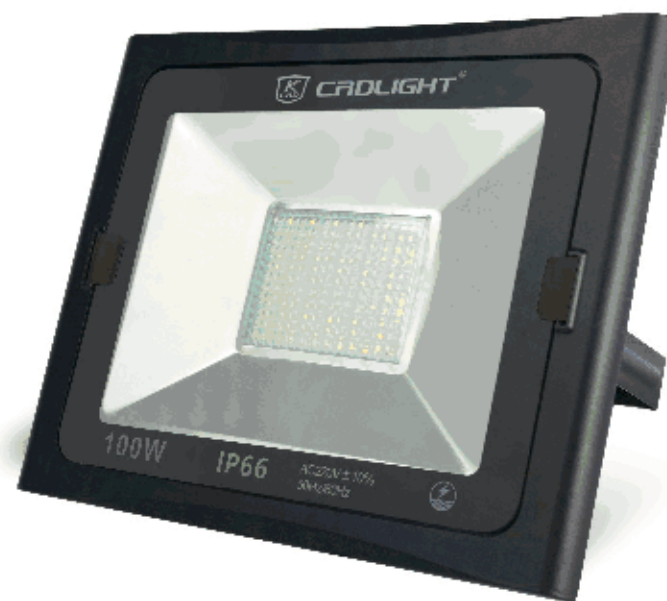

102° angle type, 20000hrs.

Aluminum with plastic material.

102°发光角度，20000小时寿命。



Applications/场景应用

Mainly used in Highway, supermarkets, gymnasium, parking lot, large scale squares and other large space lighting.

主要用于公路、超市、体育馆、停车场、大型广场等大型空间照明。

CCT色温: 3000/4000/6500K

型号	功率	输入电压	功率因数	显色指数	光通量	发光角度	产品尺寸	工作温度	质保	外箱尺寸	单箱体积
CRD-F30W	30W	AC100-240V	0.9	>80	2400lm	102°	180*140*37mm	-20~45℃	2 years	50.5*47.5*21.5cm/30	0.052
CRD-F50W	50W	AC100-240V	0.9	>80	4000lm	102°	220*170*37mm	-20~45℃	2 years	47.5*37*27.5cm/20	0.048
CRD-F100W	100W	AC100-240V	0.9	>80	8000lm	102°	282*220*41.5mm	-20~45℃	2 years	60*30.5*26.5cm/12	0.048
CRD-F150W	150W	AC100-240V	0.9	>80	12000lm	102°	322*250*46.5mm	-20~45℃	2 years	34*29*35.5cm/6	0.035
CRD-F200W	200W	AC100-240V	0.9	>80	16000lm	102°	383*300*46.5mm	-20~45℃	2 years	34*32.5*41cm/6	0.045



Wireless switch series 无线开关系列

Wireless switch series / 无线开关系列



Receiver / 接收器



Switch Transmitter / 开关发射器

Product Features / 产品特点

Wireless connection. Installation not need wire, saving wire and labor costs. Free passive and battery, using the self-generating; Technology of mechanical energy conversion to electric energy, energy saving, environmental protection, safety and reliability.
无线连接，安装不需要布线，节约电线成本及人力成本；
无源，无电池，使用机械能转电能的自发电技术，节能环保，安全、可靠。

Applications / 场景应用

Household lighting area.
产品要应用在家居照明。

Shops and Household Bulb Series
店铺和家居灯系列



Factory and Warehouse Bulb Series
工厂和仓库灯系列



OUTDOOR FLOODLIGHT series
户外泛光灯系列

