

www.cxguanhong.com



**GUANHONG ELECTRONICS**  
www.cxguanhong.com

Cixi  
**GUANHONG**  
**ELECTRONICS**  
Co.,Ltd.

GUANHONG



Add: XinLian Road, SanBei Industry Zone(315331), Cixi, Ningbo, Zhejiang, China.  
Tel: 86-574-63752880 Fax: 86-574-63752881  
Mobile: 86-13906620680 Manager: Nell Rong  
Web: www.cxguanhong.com E-mail: sales@cxguanhong.com nlrong@163.com

# Cixi GUANHONG ELECTRONICS Co.,Ltd.

## Brief introduction

Cixi Guan hong Electronics Co.,Ltd. is a professional manufacturer in car alarm siren, auto accessories and home security fittings. The main products of our enterprise are piezo siren, battery back up siren, electronic siren, horn speaker, strobe light and magnetic switches. They are widely used in car alarm system, home security, police alarm system, etc. The location of our company is ascendant. You can enjoy convenient transportation and excellent communication. Our company has a rich technical force, advanced technological equipment and complete test facilities. We strictly carry out the requirement of ISO9001 quality system.

Our company upholds the operation principle "Quality for existence, Prestige for marketing", and sincerely provides quality products.

We sincerely welcome customers home and abroad to our company.

## Item explanation

P1-P2 Backup Alarm  
P3-P4 Piezo Siren  
P5-P8 Electronic Siren

P9-P10 Battery Backup Alarm  
P11-P12 Driver Unit  
P13-P14 Central Door Lock System


P15-P17 Magnetic Switch  
P18 Pir Sensor For Light  
P19-P20 Strobe Light



## Certificate



GUANHONG

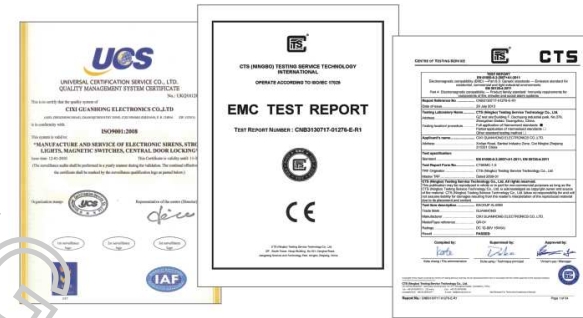

Quality for existence, Prestige for marketing






◆DC12-80V ◆Sturdy and durable ◆Anti-seismic ◆Loud ◆Waterproof  
◆Self-preservation function ◆Easy installation


## BACKUP ALARM

The product is specialized in doing excavator, construction machinery and other special vehicle, container vehicle, large vehicle. These products all kinds of performance is stable and reliable, which compare favorably with part of import products.



## BACKUP ALARM


GR-04

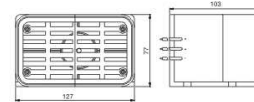

*Technical parameters*

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	112dB±3dB
Material	Nylon
Color	Black
Outer packing	24PCS/45*27*29cm
N.W/G.W	17.5kgs/18.5kgs
Waterproof grade	IP67


GR-05



*Technical parameters*

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB
Material	Nylon
Color	Black
Outer packing	80PCS/42*23*29cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67


GR-06



*Technical parameters*

Power	10W
Voltage	DC 12-24V
Current	120mA
Sound	Beep-beep sound
dB/M	108dB
Material	ABS
Color	Black
Outer packing	200PCS/47*38*31cm
N.W/G.W	13.5kgs/14.5kgs
Waterproof grade	IP67


GR-01



*Technical parameters*

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB±3dB
Material	Nylon
Color	Black
Outer packing	60PCS/44*25*26cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67


GR-02



*Technical parameters*

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB±3dB
Material	Nylon
Color	Black
Outer packing	60PCS/44*25*26cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67


GR-03



*Technical parameters*

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	112dB±3dB
Material	Nylon
Color	Black
Outer packing	48PCS/43.5*24.5*30.5cm
N.W/G.W	18kgs/19kgs
Waterproof grade	IP67


GR-07



*Technical parameters*

Power	10W
Voltage	DC 12-24V
Current	120mA
Sound	Beep-beep sound
dB/M	108dB
Material	PP
Color	Black
Outer packing	100PCS/42*36*40cm
N.W/G.W	7.5kgs/8.5kgs
Waterproof grade	IP65


GR-09



*Technical parameters*

Power	15W
Voltage	DC 12-80V
Current	250mA
Sound	Beep-beep sound/ White noise
dB/M	102dB±3dB
Material	Nylon
Color	Black
Outer packing	60PCS/44*25*26cm
N.W/G.W	15kgs/16kgs
Waterproof grade	IP67

GR-10

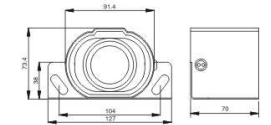

*Technical parameters*

Power	20W
Voltage	DC 12-80V
Current	500mA
Sound	Beep-beep sound/ White noise
dB/M	112dB±3dB
Material	Steel
Color	Black
Outer packing	24PCS/32*27*28cm
N.W/G.W	18kgs/19kgs
Waterproof grade	IP67

**PIEZO SIREN**

**GP-01**




*Technical parameters*

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black/White
Packing	200PCS/0.032CBM


**GP-02**




*Technical parameters*

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or Car back, Melodic
dB/M	110/115dB
Material	ABS
Color	Black/White
Packing	200PCS/0.084CBM

**GP-03**




*Technical parameters*

Power	10/15W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	105/110dB
Material	ABS
Color	Black/White
Packing	100PCS/0.039CBM



**GP-04**




*Technical parameters*

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black
Packing	200PCS/0.033CBM



**GP-05**

*Technical parameters*

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	108dB
Material	ABS
Color	White
Packing	100PCS/0.055CBM

**GP-06**

*Technical parameters*

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black/Red/White
Packing	200PCS/0.049CBM

**PIEZO SIREN**



**GP-07**




*Technical parameters*

Power	10/15W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	110dB
Material	ABS
Color	Black/Red
Packing	100PCS/0.062CBM



**GP-09**

*Technical parameters*

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	150mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black/White
Packing	200PCS/0.02CBM



**GP-12**

*Technical parameters*

Power	10W
Freq.	4.3K
Voltage	DC 6-15V/24V
Current	180mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black
Packing	100PCS/0.028CBM

**GP-15**

*Technical parameters*

Power	10W
Freq.	2.6K
Voltage	DC 6-15V/24V
Current	120mA
Sound	1 or 6 Tone, Melodic
dB/M	105dB
Material	ABS
Color	Black
Packing	-

**GP-16**




*Technical parameters*

Power	5W
Freq.	2.6K
Voltage	DC 6-24V
Current	120mA
Sound	1 or Bebe
dB/M	105dB
Material	ABS
Color	Black/White
Packing	500PCS/0.02CBM


**GP-17**




*Technical parameters*

Power	5W
Freq.	2.6K
Voltage	DC 6-24V
Current	150mA
Sound	1 or Bebe
dB/M	95/100dB
Material	ABS
Color	Black/White
Packing	500PCS/0.03CBM



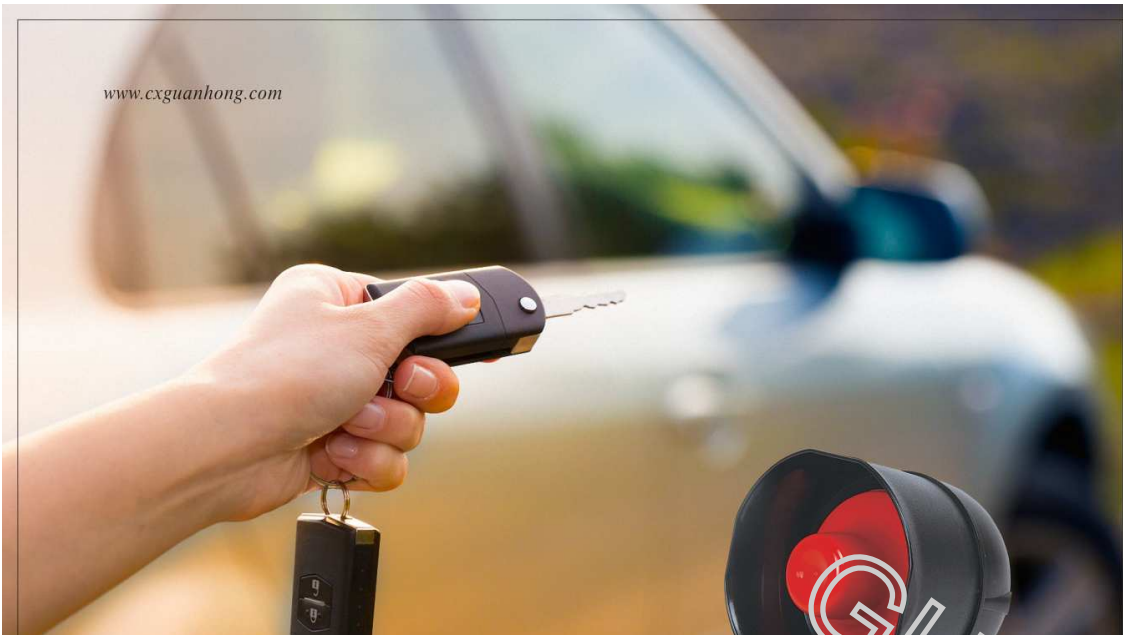


## ELECTRONIC SIREN

Cixi GUANHONG ELECTRONICS Co.,Ltd.



## ELECTRONIC SIREN


GS-25



*Technical parameters*

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	113/118dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM


GS-27



*Technical parameters*

Power	15/20W
Imped.	6/10 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	113/118dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM


GS-35



*Technical parameters*

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	PP
Color	Black
Packing	50PCS/0.06CBM


GS-18



*Technical parameters*

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 2 Tone
dB/M	119dB
Material	ABS
Color	Black
Packing	-


GS-20



*Technical parameters*

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM



GS-23

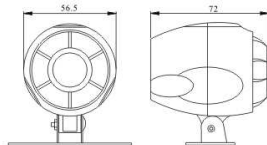

*Technical parameters*

Power	15/20W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	113/118dB
Material	ABS
Color	Black
Packing	60PCS/0.048CBM


GS-36



*Technical parameters*

Power	15W
Imped.	6 ohm
Voltage	DC 6-15V
Current	600mA
Sound	1 or 2 Tone
dB/M	115dB
Material	ABS
Color	White
Packing	40PCS/0.039CBM


GS-38

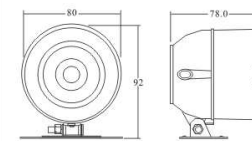

*Technical parameters*

Power	15/20W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black/Red
Packing	50PCS/0.042CBM

GS-39

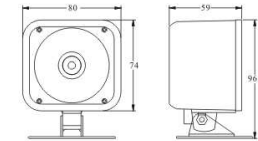

*Technical parameters*

Power	15/20W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115dB
Material	ABS
Color	Black
Packing	50PCS/0.04CBM

## ELECTRONIC SIREN

**GS-44**




*Technical parameters*

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	PP
Color	Black
Packing	40PCS/0.058CBM

**GS-48**




*Technical parameters*

Power	15/20/25W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	110/115/120dB
Material	ABS
Color	Black
Packing	40PCS/0.06CBM

**GH-50**




*Technical parameters*

Power	25W
Imped.	6 ohm
Freq	400-7.5KHz
dB/M	120dB
Material	PP
Color	Green



**GH-53**




*Technical parameters*

Power	12/20/25W
Imped.	4/6/8 ohm
Freq	400-7.5KHz
Material	PP
Color	Red/Black
Packing	24PCS/0.07CBM

**GS-55**

*Technical parameters*

Power	20/25/30W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120/125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.08CBM

**GS-55-F**




*Technical parameters*

Power	25/30W
Voltage	DC 6-15V
Current	1200/1500mA
Sound	4 Tone with buttons
	Fire/Police/Ambulance/Engineering truck
dB/M	125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.08CBM

## ELECTRONIC SIREN

**GS-55-T3**




*Technical parameters*

Power	30W
Voltage	DC 6-15V
Current	1200mA
Sound	3 Tone with buttons
	Fire engine/Police siren/Ambulance
dB/M	125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.08CBM


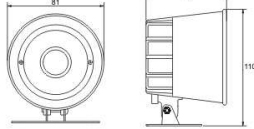
**GS-57**




*Technical parameters*

Power	20/25/30W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120/125dB
Material	ABS
Color	Black/White
Packing	24PCS/0.1CBM


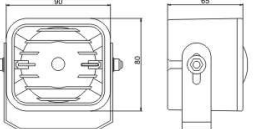
**GS-62**

*Technical parameters*

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 6 Tone, Melodic
dB/M	118dB
Material	PP
Color	Black
Packing	-

**GS-68**

*Technical parameters*

Power	20W
Imped.	6 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 2 Tone
dB/M	119dB
Material	ABS
Color	Black
Packing	-


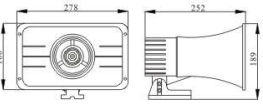
**GS-85**




*Technical parameters*

Power	20/25/30W
Imped.	4/6/8 ohm
Voltage	DC 6-15V/AC 100-220V
Current	600/800/1200mA
Sound	1 or 6 Tone, Melodic
dB/M	115/120/125dB
Material	ABS
Color	White
Packing	12PCS/0.1CBM

**GH-711**

*Technical parameters*


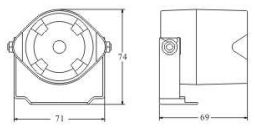

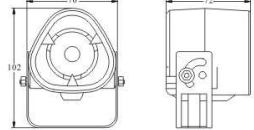

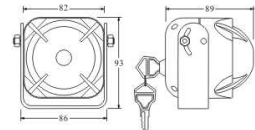

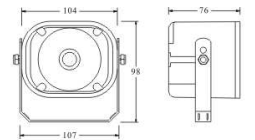

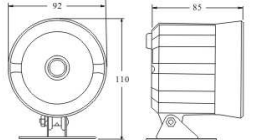

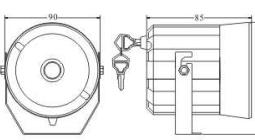
Power	40W
Imped.	4/6/8 ohm
Voltage	DC 6-15V
Current	1200mA
Sound	1 or 6 Tone, Melodic
dB/M	125dB
Material	ABS
Color	White
Packing	12PCS/0.15CBM



## BATTERY BACKUP ALARM

GB-19	GB-21	GB-22																																																								
  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>20W</td></tr> <tr><td>Imped.</td><td>6 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>119dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>N.W/G.W</td><td>16.5kgs/17.5kgs</td></tr> <tr><td>Packing</td><td>60PCS/0.042CBM</td></tr> </table>	Power	20W	Imped.	6 ohm	Voltage	DC 6-15V	Current	1200mA	Sound	1 or 6 Tone, Melodic	dB/M	119dB	Material	ABS	Color	Black	N.W/G.W	16.5kgs/17.5kgs	Packing	60PCS/0.042CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>100PCS/0.055CBM</td></tr> </table>	Power	15/20W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	100PCS/0.055CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>100PCS/0.055CBM</td></tr> </table>	Power	15/20W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	100PCS/0.055CBM
Power	20W																																																									
Imped.	6 ohm																																																									
Voltage	DC 6-15V																																																									
Current	1200mA																																																									
Sound	1 or 6 Tone, Melodic																																																									
dB/M	119dB																																																									
Material	ABS																																																									
Color	Black																																																									
N.W/G.W	16.5kgs/17.5kgs																																																									
Packing	60PCS/0.042CBM																																																									
Power	15/20W																																																									
Imped.	6/10 ohm																																																									
Voltage	DC 6-15V																																																									
Current	600/1200mA																																																									
Sound	1 or 6 Tone, Melodic																																																									
dB/M	115/120dB																																																									
Material	ABS																																																									
Color	Black																																																									
Packing	100PCS/0.055CBM																																																									
Power	15/20W																																																									
Imped.	6/10 ohm																																																									
Voltage	DC 6-15V																																																									
Current	600/1200mA																																																									
Sound	1 or 6 Tone, Melodic																																																									
dB/M	115/120dB																																																									
Material	ABS																																																									
Color	Black																																																									
Packing	100PCS/0.055CBM																																																									
GB-24	GB-26	GB-28																																																								
  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>100PCS/0.055CBM</td></tr> </table>	Power	15/20W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	100PCS/0.055CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>100PCS/0.055CBM</td></tr> </table>	Power	15/20W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	100PCS/0.055CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>100PCS/0.055CBM</td></tr> </table>	Power	15/20W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	100PCS/0.055CBM		
Power	15/20W																																																									
Imped.	6/10 ohm																																																									
Voltage	DC 6-15V																																																									
Current	600/1200mA																																																									
Sound	1 or 6 Tone, Melodic																																																									
dB/M	115/120dB																																																									
Material	ABS																																																									
Color	Black																																																									
Packing	100PCS/0.055CBM																																																									
Power	15/20W																																																									
Imped.	6/10 ohm																																																									
Voltage	DC 6-15V																																																									
Current	600/1200mA																																																									
Sound	1 or 6 Tone, Melodic																																																									
dB/M	115/120dB																																																									
Material	ABS																																																									
Color	Black																																																									
Packing	100PCS/0.055CBM																																																									
Power	15/20W																																																									
Imped.	6/10 ohm																																																									
Voltage	DC 6-15V																																																									
Current	600/1200mA																																																									
Sound	1 or 6 Tone, Melodic																																																									
dB/M	115/120dB																																																									
Material	ABS																																																									
Color	Black																																																									
Packing	100PCS/0.055CBM																																																									

## BATTERY BACKUP ALARM

GB-29	GB-30	GB-31																																																						
  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>100PCS/0.06CBM</td></tr> </table>	Power	15/20W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	100PCS/0.06CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20/25W</td></tr> <tr><td>Imped.</td><td>6/10 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>40PCS/0.05CBM</td></tr> </table>	Power	15/20/25W	Imped.	6/10 ohm	Voltage	DC 6-15V	Current	600/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	115/120dB	Material	ABS	Color	Black	Packing	40PCS/0.05CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20/25W</td></tr> <tr><td>Imped.</td><td>4/6/8 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/800/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>110/115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>40PCS/0.048CBM</td></tr> </table>	Power	15/20/25W	Imped.	4/6/8 ohm	Voltage	DC 6-15V	Current	600/800/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	110/115/120dB	Material	ABS	Color	Black	Packing	40PCS/0.048CBM
Power	15/20W																																																							
Imped.	6/10 ohm																																																							
Voltage	DC 6-15V																																																							
Current	600/1200mA																																																							
Sound	1 or 6 Tone, Melodic																																																							
dB/M	115/120dB																																																							
Material	ABS																																																							
Color	Black																																																							
Packing	100PCS/0.06CBM																																																							
Power	15/20/25W																																																							
Imped.	6/10 ohm																																																							
Voltage	DC 6-15V																																																							
Current	600/1200mA																																																							
Sound	1 or 6 Tone, Melodic																																																							
dB/M	115/120dB																																																							
Material	ABS																																																							
Color	Black																																																							
Packing	40PCS/0.05CBM																																																							
Power	15/20/25W																																																							
Imped.	4/6/8 ohm																																																							
Voltage	DC 6-15V																																																							
Current	600/800/1200mA																																																							
Sound	1 or 6 Tone, Melodic																																																							
dB/M	110/115/120dB																																																							
Material	ABS																																																							
Color	Black																																																							
Packing	40PCS/0.048CBM																																																							
GB-32	GB-33	GB-34																																																						
  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20/25W</td></tr> <tr><td>Imped.</td><td>4/6/8 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/800/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>110/115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>40PCS/0.048CBM</td></tr> </table>	Power	15/20/25W	Imped.	4/6/8 ohm	Voltage	DC 6-15V	Current	600/800/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	110/115/120dB	Material	ABS	Color	Black	Packing	40PCS/0.048CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20/25W</td></tr> <tr><td>Imped.</td><td>4/6/8 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/800/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>110/115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>40PCS/0.048CBM</td></tr> </table>	Power	15/20/25W	Imped.	4/6/8 ohm	Voltage	DC 6-15V	Current	600/800/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	110/115/120dB	Material	ABS	Color	Black	Packing	40PCS/0.048CBM	  <p><i>Technical parameters</i></p> <table border="1"> <tr><td>Power</td><td>15/20/25W</td></tr> <tr><td>Imped.</td><td>4/6/8 ohm</td></tr> <tr><td>Voltage</td><td>DC 6-15V</td></tr> <tr><td>Current</td><td>600/800/1200mA</td></tr> <tr><td>Sound</td><td>1 or 6 Tone, Melodic</td></tr> <tr><td>dB/M</td><td>110/115/120dB</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>Black</td></tr> <tr><td>Packing</td><td>40PCS/0.048CBM</td></tr> </table>	Power	15/20/25W	Imped.	4/6/8 ohm	Voltage	DC 6-15V	Current	600/800/1200mA	Sound	1 or 6 Tone, Melodic	dB/M	110/115/120dB	Material	ABS	Color	Black	Packing	40PCS/0.048CBM
Power	15/20/25W																																																							
Imped.	4/6/8 ohm																																																							
Voltage	DC 6-15V																																																							
Current	600/800/1200mA																																																							
Sound	1 or 6 Tone, Melodic																																																							
dB/M	110/115/120dB																																																							
Material	ABS																																																							
Color	Black																																																							
Packing	40PCS/0.048CBM																																																							
Power	15/20/25W																																																							
Imped.	4/6/8 ohm																																																							
Voltage	DC 6-15V																																																							
Current	600/800/1200mA																																																							
Sound	1 or 6 Tone, Melodic																																																							
dB/M	110/115/120dB																																																							
Material	ABS																																																							
Color	Black																																																							
Packing	40PCS/0.048CBM																																																							
Power	15/20/25W																																																							
Imped.	4/6/8 ohm																																																							
Voltage	DC 6-15V																																																							
Current	600/800/1200mA																																																							
Sound	1 or 6 Tone, Melodic																																																							
dB/M	110/115/120dB																																																							
Material	ABS																																																							
Color	Black																																																							
Packing	40PCS/0.048CBM																																																							




## DRIVER UNIT

Cixi GUANHONG ELECTRONICS Co.,Ltd.



## DRIVER UNIT


**GD-76**



*Technical parameters*

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	19kgs/20kgs
Packing	48PCS/0.013CBM


**GD-77**



*Technical parameters*

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	48PCS/0.035CBM


**GD-78**



*Technical parameters*

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	48PCS/0.022CBM


**GD-33**



*Technical parameters*

Power	15/20W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	100PCS/0.015CBM


**GD-35**



*Technical parameters*

Power	15/20W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	60PCS/0.024CBM


**GD-55**



*Technical parameters*

Power	15/20W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	24# 10cm
dB/M	120dB
Material	ABS
Color	Black
Packing	60PCS/0.03CBM


**GD-79**



*Technical parameters*

Power	25W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	18# 20cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	15kgs/16kgs
Packing	36PCS/0.03CBM


**GD-80**



*Technical parameters*

Power	40W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	18# 20cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	14.5kgs/15.5kgs
Packing	16PCS/0.018CBM

**GD-81**



*Technical parameters*

Power	40W
Freq.	400-7.5kHz
Imped.	4/6/8 ohm
Wire	18# 20cm
dB/M	120dB
Material	ABS
Color	Black
N.W/G.W	14.5kgs/15.5kgs
Packing	16PCS/0.018CBM



## CENTRAL DOOR LOCK SYSTEM





*Technical parameters*

Operating voltage	12V or 24V DC
Operating temperature	-40°C~+80°C
Empty load power consumption	0.14mA
Stroke power consumption	6A
Traveling distance	17mm
Pulling power	>30N or >40N
Life cycle	100,000

- Ultrasonic welding 100% waterproof
- Packing 100PCS/0.035CBM
- Anti-block design
- With 360 degree rotatable head(Optional)

## CENTRAL DOOR LOCK SYSTEM

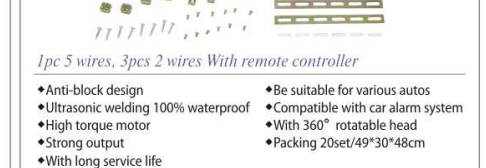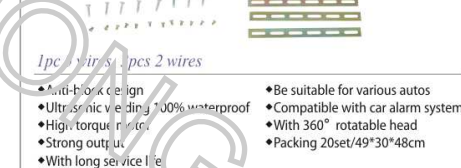

## MAGNETIC SWITCH

GM-01	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 15\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC200V</p> <p>Current 300mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 400PCS</p> <p>Meas 30*25*32cm</p>

GM-02	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 15\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC200V</p> <p>Current 100mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 800PCS</p> <p>Meas 30*25*32cm</p>

GM-03	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 15\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC200V</p> <p>Current 100mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 800PCS</p> <p>Meas 30*25*32cm</p>

GM-04	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 35\text{mm}, \leq 80\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material Metal</p> <p>Color Grey</p> <p>QTY 36PCS</p> <p>Meas 30*25*32cm</p>

GM-05	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 15\text{mm}, \leq 55\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 800PCS</p> <p>Meas 30*25*32cm</p>

## MAGNETIC SWITCH

GM-07	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O</p> <p>Active gap <math>\geq 14\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 1000PCS</p> <p>Meas 30*25*32cm</p>

GM-08	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O</p> <p>Active gap <math>\geq 15\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 1000PCS</p> <p>Meas 33*21*26cm</p>



GM-11	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 15\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 500PCS</p> <p>Meas 33*22*32cm</p>



GM-15	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 17\text{mm}, \leq 25\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material ABS</p> <p>Color White</p> <p>QTY 400PCS</p> <p>Meas 30*25*32cm</p>



GM-17	Drawing	Technical parameters
		<p>CON.Mode COM.,N/O, N/C</p> <p>Active gap <math>\geq 40\text{mm}, \leq 80\text{mm}</math></p> <p>Voltage DC100V</p> <p>Current 500mA</p> <p>Power 10W</p> <p>Material Metal</p> <p>Color Grey</p> <p>QTY 50PCS</p> <p>Meas 30*25*32cm</p>


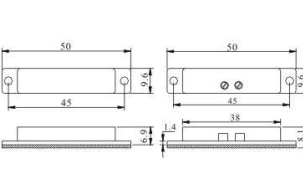



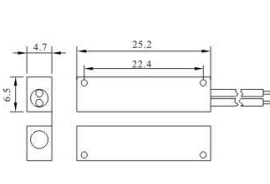
## MAGNETIC SWITCH

GM-18	Drawing	Technical parameters																		
		<table border="0"> <tr><td>CON.Mode</td><td>COM.,N/O, N/C</td></tr> <tr><td>Active gap</td><td>≥50mm, ≤90mm</td></tr> <tr><td>Voltage</td><td>DC100V</td></tr> <tr><td>Current</td><td>500mA</td></tr> <tr><td>Power</td><td>10W</td></tr> <tr><td>Material</td><td>Metal</td></tr> <tr><td>Color</td><td>Grey</td></tr> <tr><td>QTY</td><td>40PCS</td></tr> <tr><td>Meas</td><td>30*25*32cm</td></tr> </table>	CON.Mode	COM.,N/O, N/C	Active gap	≥50mm, ≤90mm	Voltage	DC100V	Current	500mA	Power	10W	Material	Metal	Color	Grey	QTY	40PCS	Meas	30*25*32cm
CON.Mode	COM.,N/O, N/C																			
Active gap	≥50mm, ≤90mm																			
Voltage	DC100V																			
Current	500mA																			
Power	10W																			
Material	Metal																			
Color	Grey																			
QTY	40PCS																			
Meas	30*25*32cm																			

GM-19	Drawing	Technical parameters																		
		<table border="0"> <tr><td>CON.Mode</td><td>COM.,N/O, N/C</td></tr> <tr><td>Active gap</td><td>≥42mm, ≤58mm</td></tr> <tr><td>Voltage</td><td>DC100V</td></tr> <tr><td>Current</td><td>500mA</td></tr> <tr><td>Power</td><td>10W</td></tr> <tr><td>Material</td><td>Metal</td></tr> <tr><td>Color</td><td>Grey</td></tr> <tr><td>QTY</td><td>20PCS</td></tr> <tr><td>Meas</td><td>30*25*32cm</td></tr> </table>	CON.Mode	COM.,N/O, N/C	Active gap	≥42mm, ≤58mm	Voltage	DC100V	Current	500mA	Power	10W	Material	Metal	Color	Grey	QTY	20PCS	Meas	30*25*32cm
CON.Mode	COM.,N/O, N/C																			
Active gap	≥42mm, ≤58mm																			
Voltage	DC100V																			
Current	500mA																			
Power	10W																			
Material	Metal																			
Color	Grey																			
QTY	20PCS																			
Meas	30*25*32cm																			

GM-20	Drawing	Technical parameters																		
		<table border="0"> <tr><td>CON.Mode</td><td>COM.,N/O, N/C</td></tr> <tr><td>Active gap</td><td>≥45mm, ≤80mm</td></tr> <tr><td>Voltage</td><td>DC100V</td></tr> <tr><td>Current</td><td>500mA</td></tr> <tr><td>Power</td><td>10W</td></tr> <tr><td>Material</td><td>ABS and Metal</td></tr> <tr><td>Color</td><td>Grey</td></tr> <tr><td>QTY</td><td>40PCS</td></tr> <tr><td>Meas</td><td>30*25*32cm</td></tr> </table>	CON.Mode	COM.,N/O, N/C	Active gap	≥45mm, ≤80mm	Voltage	DC100V	Current	500mA	Power	10W	Material	ABS and Metal	Color	Grey	QTY	40PCS	Meas	30*25*32cm
CON.Mode	COM.,N/O, N/C																			
Active gap	≥45mm, ≤80mm																			
Voltage	DC100V																			
Current	500mA																			
Power	10W																			
Material	ABS and Metal																			
Color	Grey																			
QTY	40PCS																			
Meas	30*25*32cm																			

GM-21	Drawing	Technical parameters																		
		<table border="0"> <tr><td>CON.Mode</td><td>COM.,N/O, N/C</td></tr> <tr><td>Active gap</td><td>≥15mm, ≤30mm</td></tr> <tr><td>Voltage</td><td>DC100V</td></tr> <tr><td>Current</td><td>500mA</td></tr> <tr><td>Power</td><td>10W</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>White</td></tr> <tr><td>QTY</td><td>1000PCS</td></tr> <tr><td>Meas</td><td>30*25*32cm</td></tr> </table>	CON.Mode	COM.,N/O, N/C	Active gap	≥15mm, ≤30mm	Voltage	DC100V	Current	500mA	Power	10W	Material	ABS	Color	White	QTY	1000PCS	Meas	30*25*32cm
CON.Mode	COM.,N/O, N/C																			
Active gap	≥15mm, ≤30mm																			
Voltage	DC100V																			
Current	500mA																			
Power	10W																			
Material	ABS																			
Color	White																			
QTY	1000PCS																			
Meas	30*25*32cm																			

GM-22	Drawing	Technical parameters																		
		<table border="0"> <tr><td>CON.Mode</td><td>COM.,N/O, N/C</td></tr> <tr><td>Active gap</td><td>≥15mm, ≤25mm</td></tr> <tr><td>Voltage</td><td>DC200V</td></tr> <tr><td>Current</td><td>100mA</td></tr> <tr><td>Power</td><td>10W</td></tr> <tr><td>Material</td><td>ABS</td></tr> <tr><td>Color</td><td>White</td></tr> <tr><td>QTY</td><td>1000PCS</td></tr> <tr><td>Meas</td><td>30*25*32cm</td></tr> </table>	CON.Mode	COM.,N/O, N/C	Active gap	≥15mm, ≤25mm	Voltage	DC200V	Current	100mA	Power	10W	Material	ABS	Color	White	QTY	1000PCS	Meas	30*25*32cm
CON.Mode	COM.,N/O, N/C																			
Active gap	≥15mm, ≤25mm																			
Voltage	DC200V																			
Current	100mA																			
Power	10W																			
Material	ABS																			
Color	White																			
QTY	1000PCS																			
Meas	30*25*32cm																			


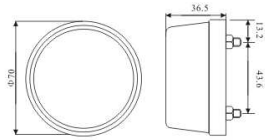

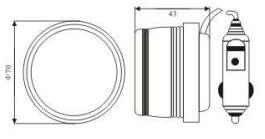

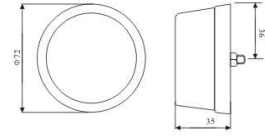

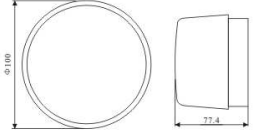

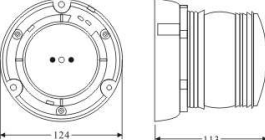


## PIR SENSOR FOR LIGHT

### Technical parameters

Detection angle	180°
Detection range	2-12m
Working voltage	DC24-51V/AC220V
Power rating	300W
Delay time	8s-12min
Illumination	2-2000LUX
Operating temperature	-20°C~+40°C
Operating humidity	Less than 93% RH
Installation height	1.8m-2.5m
Color	Black/Grey/White

## STROBE LIGHT

GL-01	Drawing	Technical parameters
		Voltage DC 12V Current 120mA Flashes 90/minute Install Two screws Color Red/Blue/Yellow QTY 120PCS Meas 45*29*37cm
		Voltage DC 12V Current 120mA Flashes 90/minute Install Magnet Color Red/Blue/Yellow QTY 48PCS Meas 61*43*45cm
		Voltage DC 12V Current 120mA Flashes 90/minute Install One screw Color Red/Blue/Yellow QTY 120PCS Meas 45*29*37cm
		Voltage DC 12V Current 300mA Flashes 90/minute Install Two screws Color Red/Blue/Yellow QTY 48PCS Meas 58*24*45cm
		Voltage DC 12V Current 200mA Flashes 90/minute Install Two screws Color Red/Blue/Yellow QTY 64PCS Meas 52*52*50cm

## STROBE LIGHT

GL-08	Drawing	Technical parameters
		Voltage DC 12V Current 300mA Flashes 90/minute Install Two screws Color Red/Blue/Yellow QTY 16PCS Meas 55*39*56cm
		Voltage DC 12V Current 300mA Flashes 150/minute Install Two screws Color Red/Blue/Yellow QTY 100PCS Meas 58*24*45cm
		Voltage DC 12V Current 300mA Flashes 150/minute Install Two screws Color Red/Blue/Yellow QTY 100PCS Meas 58*24*45cm
		Voltage DC 12V Current 1500mA Flashes 130/minute Install Magnet Color Red/Blue/Yellow QTY 20PCS Meas 70*42*32cm
		Voltage DC 12V Current 1500mA Flashes 130/minute Install Magnet Color Red/Blue/Yellow QTY 20PCS Meas 70*42*32cm