

Specifications -FULL RANGE

Photo	Brand/ Model	English Name&Description
	MAX15 (Monitor)	<p>Type: Single 15" Coaxial Speaker</p> <ol style="list-style-type: none"> 1) Components: 1x 15"; 1x2.4" (Coaxial driver - Fe) 2) Frequency Response: 60Hz - 20KHz(±3dB) 3) Sensitivity(1W/1M): 100dB 4) Maximum Peak SPL: 126dB 5) Rated Power(RMS): 500W 6) Peak Power(RMS): 1000W 7) Impedance(Ohm): 8 ohms 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 90o Coaxial Symmetry 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 392*580*507 mm 14) Net. W.: 26 kg
	LA-115M (Monitor)	<p>Type: Single 15" 2-way full range Speaker</p> <ol style="list-style-type: none"> 1) Components: LF: 1x15";HF:1x2" 2) Frequency Response: 52Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 99dB 4) Maximum Peak SPL: 124dB 5) Rated Power(RMS): 450W 6) Peak Power(RMS): 900W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 55H x 50-100V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Nexo Matt Paint 13) Dimensions (W*D*H): 466*490*759 mm 14) Net. W.: 33 kg
	PS15R2 (Monitor)	<p>Type: Single 15" 2-way full range Speaker</p> <ol style="list-style-type: none"> 1) Components: LF: 1x15";HF:1x3" 2) Frequency Response: 52Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 100dB 4) Maximum Peak SPL: 126dB 5) Rated Power(RMS): 450W 6) Peak Power(RMS): 900W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 55H x 50-100V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Nexo Matt Paint 13) Dimensions (W*D*H): 675*434*368 mm 14) Net. W.: 26 kg

RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com

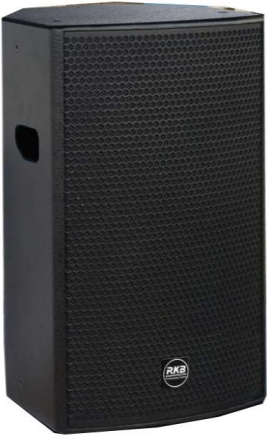



	<p>CF-308</p>	<p>Type : Single 8" 2-way full range Speaker 1) Components: LF: 1x8";HF:1x1.34" 2) Frequency Response: 63Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 96dB 4) Maximum Peak SPL: 120dB 5) Rated Power(RMS): 200W 6) Peak Power(RMS): 400W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.5 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 260*250*428 mm 14) Net. W.: 12 kg</p>
	<p>CF-310</p>	<p>Type : Single 10" 2-way full range Speaker 1) Components: LF: 1x10";HF:1x1.34" 2) Frequency Response: 60Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 97dB 4) Maximum Peak SPL: 121dB 5) Rated Power(RMS): 250W 6) Peak Power(RMS): 500W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.4 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 300*290*504 mm 14) Net. W.: 15.6 kg</p>
	<p>CF-312</p>	<p>Type : Single 12" 2-way full range Speaker 1) Components: LF: 1x12";HF:1x1.73" 2) Frequency Response: 55Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 122dB 5) Rated Power(RMS): 350W 6) Peak Power(RMS): 700W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.1 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 360*385*598 mm 14) Net. W.: 23.5 kg</p>

RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com

	<p style="text-align: center;">CF-315</p>	<p>Type : Single 15" 2-way full range Speaker 1) Components: LF: 1x15";HF:1x2" 2) Frequency Response: 52Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 99dB 4) Maximum Peak SPL: 124dB 5) Rated Power(RMS): 450W 6) Peak Power(RMS): 900W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 408*450*704 mm 14) Net. W.:31 kg</p>
	<p style="text-align: center;">CS-110</p>	<p>Type : Single 10" 2-way full range Speaker 1) Components: LF: 1x10";HF:1x1" 2) Frequency Response: 60Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 97dB 4) Maximum Peak SPL: 121dB 5) Rated Power(RMS): 200W 6) Peak Power(RMS): 400W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.4 KHz 9) Dispersion Angle (-6dB): 110H x 45V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: MDF 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 308*302*500 mm 14) Net. W.: 14 kg</p>
	<p style="text-align: center;">CS-112</p>	<p>Type : Single 12" 2-way full range Speaker 1) Components: LF: 1x12";HF:1x1.34" 2) Frequency Response: 55Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 122dB 5) Rated Power(RMS): 300W 6) Peak Power(RMS): 600W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.2 KHz 9) Dispersion Angle (-6dB): 110H x 45V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: MDF 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 390*368*600 mm 14) Net. W.: 23 kg</p>
	<p style="text-align: center;">CS-115</p>	<p>Type : Single 15" 2-way full range Speaker 1) Components: LF: 1x15";HF:1x1.73" 2) Frequency Response: 52Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 99dB 4) Maximum Peak SPL: 123dB 5) Rated Power(RMS): 400W 6) Peak Power(RMS): 800W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2 KHz 9) Dispersion Angle (-6dB): 110H x 45V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: MDF 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 440*410*711 mm 14) Net. W.: 29 kg</p>





RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com

	<p>MT-710</p>	<p>Type: Single 10" 2-way full range Speaker 1) Components: LF: 1x10";HF:1x1.37" 2) Frequency Response: 55Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 97dB 4) Maximum Peak SPL: 123dB 5) Rated Power(RMS): 300W 6) Peak Power(RMS): 600W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.5 KHz 9) Dispersion Angle (-6dB): 90H x 70V 10) Connectors: 2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 340*300*525 mm 14) Net. W.: 17 kg</p>
	<p>MT-712</p>	<p>Type: Single 12" 2-way full range Speaker 1) Components: LF: 1x12";HF:1x1.73" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 128dB 5) Rated Power(RMS): 450W 6) Peak Power(RMS): 900W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.8 KHz 9) Dispersion Angle (-6dB): 90H x 70V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 382*350*602 mm 14) Net. W.: 22 kg</p>
	<p>XT-810</p>	<p>Type: Single 10" 2-way full range Speaker 1) Components: LF: 1x10" (18sound) ;HF:1x1.37" 2) Frequency Response: 55Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 97dB 4) Maximum Peak SPL: 123dB 5) Rated Power(RMS): 250W 6) Peak Power(RMS): 500W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.0 KHz 9) Dispersion Angle (-6dB): 90H x 70V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High Strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 360*346*520 mm 14) Net. W.: 17.5 kg</p>
	<p>XT-812</p>	<p>Type: Single 12" 2-way full range Speaker 1) Components: LF: 1x12"(Neodymium-18Sound);HF:1x3"(Faital Pro) 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 128dB 5) Rated Power(RMS): 400W 6) Peak Power(RMS): 800W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.3 KHz 9) Dispersion Angle (-6dB): 90H x 70V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 410*399*615 mm 14) Net. W.: 24 kg</p>

	<p>XT-815</p>	<p>Type: Single 15" 2-way full range Speaker 1) Components: LF: 1x15"; HF:1x3" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 99dB 4) Maximum Peak SPL: 130dB 5) Rated Power(RMS): 500W 6) Peak Power(RMS): 1000W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.3 KHz 9) Dispersion Angle (-6dB): 90H x 70V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 478*467*676 mm 14) Net. W.: 30 kg</p>
	<p>GT-910</p>	<p>Type: Single 10" 2-way full range Speaker 1) Components: LF: 1x10" ;HF:1x1.37" 2) Frequency Response: 45Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 125dB 5) Rated Power(RMS): 300W 6) Peak Power(RMS): 600W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.3KHz 9) Dispersion Angle (-6dB): 100H x 70V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High Strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 313*305*524 mm 14) Net. W.: 17.5 kg</p>
	<p>GT-912</p>	<p>Type: Single 12" 2-way full range Speaker 1) Components: LF: 1x12";HF:1x1.75" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 99dB 4) Maximum Peak SPL: 128dB 5) Rated Power(RMS): 500W 6) Peak Power(RMS): 1000W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2 KHz 9) Dispersion Angle (-6dB): 100H x 70V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 380*360*605 mm 14) Net. W.: 23 kg</p>
	<p>DS-10</p>	<p>Type: Single 10" 2-way full range Speaker 1) Components: LF: 1x10" ;HF:1x1.37" 2) Frequency Response: 53Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 123dB 5) Rated Power(RMS): 250W 6) Peak Power(RMS): 500W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.3KHz 9) Dispersion Angle (-6dB): 90H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High Strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 335*375*520 mm 14) Net. W.: 16 kg</p>

RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com

	<p>DS-12</p>	<p>Type: Single 12" 2-way full range Speaker 1) Components: LF: 1x12";HF:1x1.73" 2) Frequency Response: 45Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 98dB 4) Maximum Peak SPL: 126dB 5) Rated Power(RMS): 400W 6) Peak Power(RMS): 800W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 2.1 KHz 9) Dispersion Angle (-6dB): 90H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 381*422*594 mm 14) Net. W.: 22.5 kg</p>
	<p>DS-15</p>	<p>Type: Single 15" 2-way full range Speaker 1) Components: LF: 1x15";HF:1x3" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 99dB 4) Maximum Peak SPL: 129dB 5) Rated Power(RMS): 500W 6) Peak Power(RMS): 1000W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 457*463*692 mm 14) Net. W.: 32 kg</p>
	<p>KK-250</p>	<p>Type: Dual 5" Column Array Speaker 1) Components: LF: 2x5"; HF:1x 1.34" 2) Frequency Response: 90Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 92 dB 4) Maximum Peak SPL: 122 dB 5) Rated Power(RMS): 120W 6) Peak Power(RMS): 240W 7) Impedance(Ohm): 4 Ohm 8) Crossover: 9) Dispersion Angle (-6dB): 60H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 168*205*515 mm 14) Net. W.: 9.2 kg</p>
	<p>KK-450</p>	<p>Type: 4x 5" Column Array Speaker 1) Components: LF: 4x5"; HF:1x 1.34" 2) Frequency Response: 90Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 95 dB 4) Maximum Peak SPL: 124 dB 5) Rated Power(RMS): 200W 6) Peak Power(RMS): 400W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 9) Dispersion Angle (-6dB): 60H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 168*205*795 mm 14) Net. W.: 13.5 kg</p>

RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com



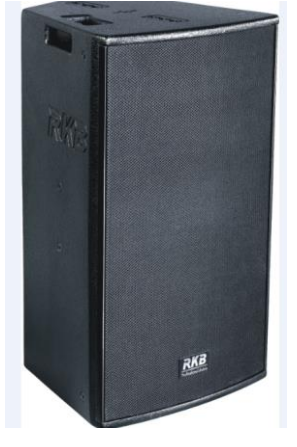

	<p>KK-650</p>	<p>Type: 6 x 5" Column Array Speaker 1) Components: LF: 6x5"; HF:1x 1.34" 2) Frequency Response: 80Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 96 dB 4) Maximum Peak SPL: 126 dB 5) Rated Power(RMS): 300W 6) Peak Power(RMS): 600W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 9) Dispersion Angle (-6dB): 60H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 168*205*1075 mm 14) Net. W.: 19.3 kg</p>
	<p>CF-225</p>	<p>Type: Double 15" 2-way full range Speaker 1) Components: LF: 2x15";HF:1x1.73" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 100dB 4) Maximum Peak SPL: 128dB 5) Rated Power(RMS): 700W 6) Peak Power(RMS): 1400W 7) Impedance(Ohm): 4 Ohm 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: MDF 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 460*535*1240 mm 14) Net. W.: 49 kg</p>
	<p>CX-225</p>	<p>Type : Double 15" 2-way full range Speaker 1) Components: LF: 2x15";HF:1x3" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 100dB 4) Maximum Peak SPL: 130dB 5) Rated Power(RMS): 800W 6) Peak Power(RMS): 1600W 7) Impedance(Ohm): 4 Ohm 8) Crossover: 1.9 KHz 9) Dispersion Angle (-6dB): 90H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 550*602*1240 mm 14) Net. W.: 60 kg</p>
	<p>HX-225</p>	<p>Type: Double 15" 2-way full range Speaker 1) Components: LF: 2x15";HF:1x3" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 101dB 4) Maximum Peak SPL: 131dB 5) Rated Power(RMS): 900W 6) Peak Power(RMS): 1800W 7) Impedance(Ohm): 4 Ohm 8) Crossover: 1.6 KHz 9) Dispersion Angle (-6dB): 90H x 60V 10) Connectors:2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 550*602*1240 mm 14) Net. W.: 67 kg</p>

RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com

	<p>HXL-225</p>	<p>Type: Double 15" 2-way full range Speaker (With Wheels)</p> <ol style="list-style-type: none"> 1) Components: LF: 2x15"; HF: 1x3" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 101dB 4) Maximum Peak SPL: 131dB 5) Rated Power(RMS): 900W 6) Peak Power(RMS): 1800W 7) Impedance(Ohm): 4 Ohm 8) Crossover: 1.6 KHz 9) Dispersion Angle (-6dB): 90H x 60V 10) Connectors: 2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 550*602*1240 mm 14) Net. W.: 67 kg
	<p>HXL-325</p>	<p>Type: Double 15" 3-way full range Speaker</p> <ol style="list-style-type: none"> 1) Components: LF: 2x15"; MF: 1x8"; HF: 1x3" 2) Frequency Response: 40Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 102dB 4) Maximum Peak SPL: 136dB 5) Rated Power(RMS): 1200W 6) Peak Power(RMS): 2400W 7) Impedance(Ohm): 4 Ohm 8) Crossover: 550HZ / 2.3 KHz 9) Dispersion Angle (-6dB): 90H x 50V 10) Connectors: 2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 560*560*1240 mm 14) Net. W.: 75 kg
	<p>MX-15</p>	<p>Type: Single 15" 2-way full range Speaker</p> <ol style="list-style-type: none"> 1) Components: LF: 1x15"; HF: 1x1.73" 2) Frequency Response: 45Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): 100dB 4) Maximum Peak SPL: 128dB 5) Rated Power(RMS): 550W 6) Peak Power(RMS): 1100W 7) Impedance(Ohm): 8 Ohm 8) Crossover: 1.8 KHz 9) Dispersion Angle (-6dB): 90H x 60V 10) Connectors: 2xNL4 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 468*458*710 mm 14) Net. W.: 32.7 kg
	<p>MX-500</p>	<p>Type: Single 15" 3-way full range Speaker</p> <ol style="list-style-type: none"> 1) Components: LF: 1x15"; MF: 1x8"; HF: 1x1" 2) Frequency Response: 60Hz-20kHz(±3dB) 3) Sensitivity(1W/1M): LF: 112dB; MF: 105dB; HF: 112dB 4) Maximum Peak SPL: 135dB / 141dB 5) Rated Power(RMS): LF: 550W; MF: 200W; HF: 50W 6) Peak Power(RMS): LF: 1600W; MF: 800W; HF: 200W 7) Impedance(Ohm): LF: 8 Ohm; MF: 16 Ohm; HF: 8 Ohm 8) Crossover: 250HZ; 4.5K / 6 kHz 9) Dispersion Angle (-6dB): 50H x 25V 10) Connectors: 1 x NL4 + 2 x NL8 Speakon 11) Enclosure Material: High-strength Plywood 12) Cabinet Finish: Germany Water Paint 13) Dimensions (W*D*H): 977*574*498 mm 14) Net. W.: 60 kg

RKB Guangzhou Hongxiang Audio Equipment Co., Ltd.

Professional Audio

Add: No.13 Fuyi Road, Shiqi Town, Panyu District, Guangzhou City, Guangdong Province, P.R China

Contact: Ms. Ella Mak Cell: +86 13929531732 Tel: +86-20-66359085 Email: ella@rkb-audio.com



T-122

- Type: Double 12" 2-way full range Speaker
- 1) Components: LF: 2x12"; HF:1x3"
 - 2) Frequency Response: 950Hz-20kHz(±3dB)
 - 3) Sensitivity(1W/1M): 108 dB
 - 4) Maximum Peak SPL: 143 dB
 - 5) Rated Power(RMS): 900W
 - 6) Peak Power(RMS): 1800W
 - 7) Impedance(Ohm): 4 Ohm
 - 8) Crossover: /
 - 9) Dispersion Angle (-6dB): 60H x 40V
 - 10) Connectors: 2 x NL4 Speakon
 - 11) Enclosure Material: High-strength Plywood
 - 12) Cabinet Finish: Germany Water Paint
 - 13) Dimensions (W*D*H): 706*440*440 mm
 - 14) Net. W.: 34 kg