



LEISURE 潇客

1. 高强度尼龙支架，左右便捷可拆卸盖板。
2. 大容量CNC加工铝质线杯。
3. 10+1个不锈钢轴承，卷线轮两端采用日本MN不锈钢轴承，耐腐蚀。
4. 磁力刹车系统。
5. 轻便流畅，可抛7g以下路亚饵。
6. 防滑橡胶把手或者EVA把手可供选择。
7. 精密加工高强度锰铜质传动齿轮，日本进口C3604材料。
8. ONE-WAY无间隙单向逆止系统。

1. High strength nylon body with removable cover plate.
2. CNC machined aluminum spool with large line capacity.
3. 10+1 stainless steel bearings and both sides of the reel are made of Japanese MN stainless steel bearings, anti-corrosion.
4. Magnetic braking system.
5. Ultra light weight and high performance for casting 1-7g lure.
6. Anti-skid soft rubber knob or light EVA knob is available.
7. Precise machined high strength manganin gear with Japanese C3604 material.
8. One way clutch anti-reverse system.

Model Name 型号名称	Gear Ratio 传动比	Drag Power 拉力	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
LEISURE GA1000R	6.3: 1	4kg	198g	10+1	0.285mm-115m 0.33mm-90m 0.37mm-75m
LEISURE GA1000L	6.3: 1	4kg	198g	10+1	#3-115m #4-90m #5-75m



NONSUCH 尚品 8KG

1. 高强度石墨支架，便捷可拆卸盖板。
2. 大容量CNC加工铝制线杯。
3. 10+1个不锈钢轴承，卷线轮两端采用日本MN不锈钢轴承，耐腐蚀。
4. 磁力刹车系统，最大钓力可达8公斤。
5. EVA把手轻便流畅。
6. 精密加工高强度锰铜质传动齿轮，日本进口C3604材料。
7. One-way 无间隙单项逆止系统。

1. High strength graphite body with removable cover plate.
2. CNC machined aluminum spool feature large line capacity.
3. 10+1 stainless steel bearings and both side of the reel made of apanese MN stainless steel bearings, anti-corrosion.
4. Magnetic braking system, 8kg max drag power.
5. Ultra light reel body and EVA knob
6. Precise machined high strength manganin gear with Japanese C3604 material.
7. One way clutch anti-reverse system.

Model Name 型号名称	Gear Ratio 传动比	Drag Power 拉力	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
NONSUCH A5(R)	7.3:1	8kg	198	10+1	12lb/220m 14lb/190m 20lb/120m
NONSUCH A5(L)	7.3:1	8kg	198	10+1	12lb/220m 14lb/190m 20lb/120m
NONSUCH A6(R)	7.3:1	8kg	198	10+1	12lb/220m 14lb/190m 20lb/120m
NONSUCH A6(L)	7.3:1	8kg	198	10+1	12lb/220m 14lb/190m 20lb/120m



NONSUCH 尚品

1. ADC耐腐蚀金属主体和侧盖板。
2. A6061-T6铝合金车削阳极线轮。
3. 超强化铜合金主齿轮齿杆。
4. 5组碳纤维泄力系统。
5. 宽幅星型刹车调整扳手易施力。
6. 不锈钢材质导线螺杆及线规。
7. 7段可调式离心刹车系统。
8. 侧盖易拆卸，线轮快速更换系统。
9. 加宽型线轮，大规模线容量。
10. 12kg净钓力，抗腐蚀系统配置，适用海钓及重磅淡水路亚。

1. ADC material corrosion-proof metal frame and side cover.
2. A6061-T6 aluminum alloy CNC machined spool.
3. Super strength brass alloy material main gear and pioneer gear.
4. 5-group carbon drag washer for drag system.
5. Wide star-drag easily push.
6. Stainless material line guide pole and line guide.
7. 7 section adjustable centrifugal braking system.
8. Open the cover handily, easy to change the spool.
9. Large spool, super colossal line capacity.
10. 12 Kg max drag power, anti-corrosion, suitable for sea fishing and heavy freshwater fishing.

Model Name 型号名称	Gear Ratio 传动比	Drag Power 拉力	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
NONSUCH DC1200R	6.3: 1	12kg	260g	10+1BB	0.285mm-210m 0.33mm-160m 0.37mm-130m
NONSUCH DC1200L	6.3: 1	12kg	260g	10+1BB	0.285mm-210m 0.33mm-160m 0.37mm-130m

振海 30KG



Infinite 无限

1. 超大尺寸单向轴承经久耐用，配有单向锁紧以及多刹系统。
2. 6.5毫米的坚固主轴能够承受巨大的拉力。
3. 陶瓷线轴在出线时更加平顺，4毫米固态线圈。
4. 全封闭的机身(6个防水线圈把整个机身，旋转按钮组件包裹起来)。
5. 不锈钢传动齿轮，小齿轮，连接齿轮和锰铜合金震动齿轮。
6. 7000/9000尺寸的最大拉力30公斤。
7. 金属机身，齿轮，数控精密加工的铝质线杯。
8. 不锈钢和碳素垫片使渔轮的拉力表现更出色。
9. 双球面轴承使线轴的运转能够高速平顺。
10. 易拆卸，可更换T型把手或EVA手柄。

1. Large size one-way durable bearings, with one-way clutch and multi braking system.
2. 6.5 mm solid main shaft can withstand great tension.
3. The ceramic spool is more smooth at the outlet, and the 4 mm solid bail wire circle.
4. A fully enclosed body (6 waterproof coils wrap up the entire wheel body and the knob assembly).
5. Stainless steel drive gear, pinion gear, connection gear, and manganese bronze oscillation gear.
6. 30kg maximum drag power.
7. Al-Si-Cu-Mg Aluminum body and rotor, CNC machined aluminum spool.
8. Stainless steel and carbon drag washers to support good dragging performance.
9. Twin ball bearing to support the high speed smooth running of spool.
10. Removable and changeable T shape knob or EVA knob.

Model Name 型号名称	Gear Ratio 传动比	Drag Power 拉力	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
INFINITE 7000B	4.1:1	30kg	730g	10+1	40lb/330yds 50lb/280yds 60lb/220yds
INFINITE 9000B	4.1:1	30kg	850g	9+1	60lb/490yds 70lb/410yds 80lb/350yds

道奇 20KG




Infinite 無極 NONSUCH 尚品

1. 高强度铝合金壳体及线杯。
2. One-Way瞬间逆止系统。
3. 独特的结构设计，系统摩擦更小，噪音更低。
4. 新结构，更轻巧，手感更舒适。
5. 独特S型滑块结构，排线更加平整。
6. 高强度不锈钢齿轮轴，最大拉力20公斤。
7. 金属CNC机加工摇臂，不锈钢传动轴，可左右手互换。
8. 卷线轮采用碳素材料摩擦片，摩擦力更大更均。
9. 镶嵌式CNC加工铝合金摇杆，搭配EVA把手，经久耐用，触感舒适。

1. High strength Aluminum body, sturdy and durable.
2. One-way clutch instant anti-reverse system.
3. Unique design with less system friction, less noise.
4. Light weight with good hand feeling.
5. Unique S shape slider structure to make sure the outlet line more smooth.
6. High strength stainless gear shaft, 20kg maximum drag power.
7. Stainless steel drive shaft, CNC handle is suitable for both left and right side.
8. Friction is stronger and more uniform with carbon washer in the spool.
9. Mosaic CNC aluminium alloy handle, matched with EVA knob, durable and nice looking, better operating feeling.

Model Name 型号名称	Gear Ratio 传动比	Drag Power 拉力	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
INFINITE 4000	5.1:1	12kg	336g	11+1	9lb/275yds 12lb/195yds 18lb/110yds
INFINITE 5000	5.1:1	12kg	333g	11+1	12lb/240yds 18lb/155yds 24lb/110yds
NONSUCH 6000	4.9:1	20kg	485g	10+1	40lb/260mm 50lb/220mm 60lb/180mm
NONSUCH 7000	4.9:1	20kg	497g	10+1	40lb/290mm 50lb/250mm 60lb/220mm

航母

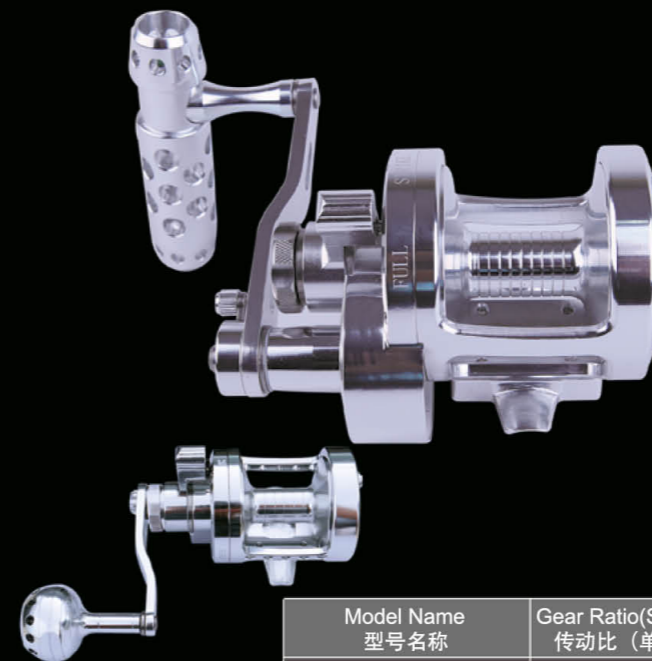

NONSUCH 尚品

1. 机身，线轮，侧盖高强度航空铝合金材料。
2. 军工级别防腐蚀防刮痕表面处理，外观靓丽不褪色。
3. 不锈钢斜齿配合，运转顺畅耐腐蚀。
4. 双面刹车设计，进口碳纤维加工的刹车材料，刹车平稳顺畅。
5. 摇臂采用2次镂空加工技术，精美而轻量化。
6. 拉簧式双棘轮反动系统。

1. Body, wheel, and side cover are made of high-strength aviation aluminum alloy material.
2. Military grade anti-corrosion anti-scratch surface treatment, the appearance is beautiful and nonfading.
3. Stainless steel helical teeth, smooth running without rust.
4. Double-sideding brake system design with imported carbon fiber, stable and smooth.
5. Rocker with twice hollow processing techniques, beautiful and light.
6. Pull spring-type double ratchet reaction system.

Model Name 型号名称	Gear Ratio(Single/Dual) 传动比 (单速/双速)	Braking force 拉力	Ball Bearing 轴承	Wire cup size 线容量	Main body size 主体尺寸
NONSUCH2000 (R/L)	4.5:1/2.1:1	18kg	7+1	10lb/300yds	Φ62*49.7
NONSUCH3000 (R/L)	4.5:1/2.1:1	18kg	7+1	10lb/420yds	Φ62*67.7
NONSUCH4000 (R/L)	4.5:1/2.1:1	20kg	7+1	20lb/265yds	Φ68*49.7
NONSUCH6000 (R/L)	4.5:1/2.1:1	20kg	7+1	20lb/330yds	Φ68*57.7
NONSUCH8000 (R/L)	4.5:1/2.1:1	20kg	7+1	20lb/410yds	Φ68*67.7
NONSUCH10000 (R/L)	4.5:1/2.1:1	25kg	7+1	20lb/495yds	Φ76*58.7
NONSUCH12000 (R/L)	4.5:1/2.1:1	25kg	7+1	20lb/615yds	Φ76*68.7

传奇



NONSUCH 尚品

1. 高强度铝合金壳体盖板与线杯。
2. 11(12)个不锈钢轴承加1个单向轴承。
3. 卷线轮双轴承设计。
4. 导套双轴承设计，CNC精密加工超远投设计卷线轮，出线超级顺滑。
5. 精加工不锈钢主轴。
6. 耐磨性极强的碳素和不锈钢摩擦片。

1. High strength Aluminum body, sturdy and durable.
2. 11(12) stainless steel ball bearing and 1 one-way ball bearing.
3. Double smooth ball bearings in spool for smooth running.
4. Double bearings in line rollers, precise CNC super long casting spool, guarantees outlet line smoothly.
5. Precise stainless steel main shaft.
6. Abrasion resistant carbon and stainless steel friction plate.

Model Name 型号名称	Gear Ratio 传动比	Drag Power 拉力	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
NONSUCH 2000	5.2:1	18lbs	285g	11+1	0.205mm/240m 0.235mm/200m 0.260mm/160m
NONSUCH 3000	5.2:1	18lbs	295g	11+1	0.235mm/240m 0.260mm/200m 0.285mm/180m
NONSUCH 4000	5.2:1	25lbs	310g	12+1	0.260mm/290m 0.285mm/260m 0.310mm/230m
NONSUCH 5000	5.2:1	25lbs	320g	12+1	0.285mm/290m 0.310mm/250m 0.330mm/230m

LEISURE 潇客K2



1. 核心转动部位搭载高效不锈钢防腐轴。
2. 采用TRP软胶把手，手感更舒适。
3. 采用用钢琴线制作的压缩式抛线弹簧，弹跳寿命达30万次以。
4. 防卷线硬导线轮，有利于收放线平滑，具有平整的绕线结果及顺畅的抛投。
5. 锻造，防腐处理的铝合金线轮。
6. 外观饰件采用UV固化处理，造就完美之表现。
7. 铝合金折叠摇臂，可左右互换。
8. 全机身，线壳采用高强度韧性工程塑料，参照航空工艺进行注射。

1. Anti-corrosion stainless steel bearings make up the key device.
2. TPR soft rubber handle has more comfortable hand feeling.
3. Compressional casting spring made of piano line, bounces up to 30,000 times.
4. Hardened chromium spool avoid line winder, withdraw and release line smoothly, flat rolling line, unhindered casting.
5. Forging and corrosion resistant aluminium alloy spool.
6. The accessories made by UV process feature perfect performance.
7. The exchangeable folding Aluminum handle.
8. Full body and line cover are made with high toughness engineering plastics, injection molding refer to aviation technology.

Model Name 型号名称	Gear Ratio 传动比	Weight 重量	Ball Bearing 轴承	Line Capacity 线容量
LEISURE K2-2000	5.5:1	243	5+1	4lb/125m 6lb/95m 18lb/119m
LEISURE K2-3000	5.5:1	260	5+1	4lb/252m 6lb/186m 8lb/126m
LEISURE K2-4000	5.5:1	290	5+1	12lb/175m 15lb/120m 18lb/104m
LEISURE K2-5000	5.5:1	302	5+1	12lb/208m 15lb/148m 18lb/120m