
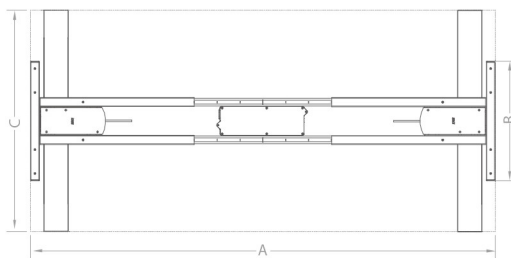


TECHNICAL DATA

SQ 650

Type	KDTJ002
Spec	Dual motor two legs
Speed	36mm/s
Max.Load	80kg/system
Leg Size	69x69mm
A	min 1091 mm/43 inch
	max 1550 mm/61 inch
B	B1 400 mm/15.8 inch
	B2 460 mm/18.1 inch
	C1 586 mm/23 inch
	C2 690 mm/27.2 inch
C	C3 738 mm/29 inch
	min 618 mm/24.3 inch
	max 1270 mm/50 inch

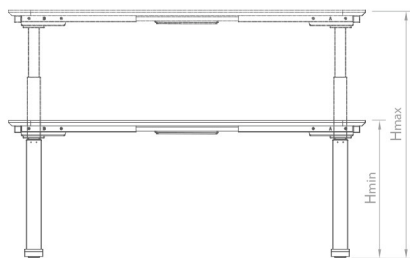

COLOUR



White

Gray

Black

Options

SQ 650



120 DEGREE PICTURE



90 DEGREE PICTURE

Handset Options



KDH064
Digital handset



KDH066
Telescopic controller



KDH006
Fixed controller



KDH126
Fixed controller

Foot Options



KDF004
Mounting Hole Position
Center/off-center
Size:24"、30"



KDF005
Mounting Hole Position
Center/off-center
Size:24"、30"

Control-unit Options



US: KDDY023N AC120V
EU: KDDY041 AC230V
Dual motor control box





US: KDDY068 AC230V
EU: KDDY068A AC120V
Dual motor control box
0.1W Standby power consumption

TECHNICAL DATA

RE 650

Type	KDTJ002
Spec	Dual motor two legs
Speed	36mm/s
Max.Load	80kg/system
Leg Size	60×95mm
A	min 1091 mm/43 inch
	max 1550 mm/61 inch
B	B1 400 mm/15.8 inch
	B2 460 mm/18.1 inch
C	C1 586 mm/23 inch
	C2 690 mm/27.2 inch
	C3 738 mm/29 inch
H	min 618 mm/24.3 inch
	max 1270 mm/50 inch

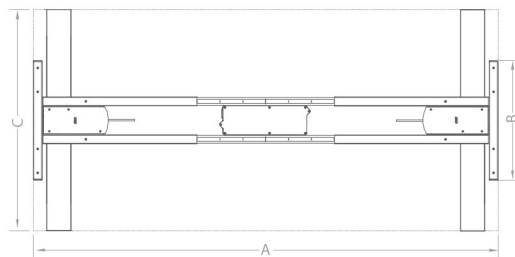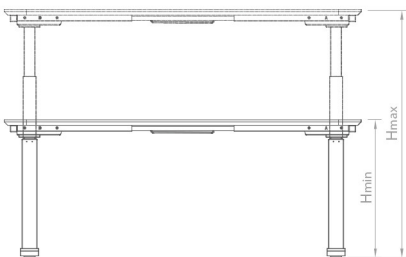

COLOUR



White

Gray

Black

Options

RE 650



120 DEGREE PICTURE

90 DEGREE PICTURE

Handset Options



KDH064

Digital handset



KDH066

Telescopic controller



KDH006

Fixed controller



KDH126

Fixed controller

Foot Options



KDF004

Mounting Hole Position

Center/off-center

Size:24"、30"



KDF005

Mounting Hole Position

Center/off-center

Size:24"、30"

Control-unit Options



US: KDDY023N AC120V
EU: KDDY041 AC230V

Dual motor control box





US: KDDY068 AC230V
EU: KDDY068A AC120V

Dual motor control box
0.1W Standby power consumption

TECHNICAL DATA

RO 650

Type	KDTJ002
Spec	Dual motor two legs
Speed	36mm/s
Max.Load	80kg/system
Leg Size	ø70mm
A	min 1091 mm/43 inch
	max 1550 mm/61 inch
B	B1 400 mm/15.8 inch
	B2 460 mm/18.1 inch
C	C1 586 mm/23 inch
	C2 690 mm/27.2 inch
	C3 738 mm/29 inch
H	min 618 mm/24.3 inch
	max 1270 mm/50 inch

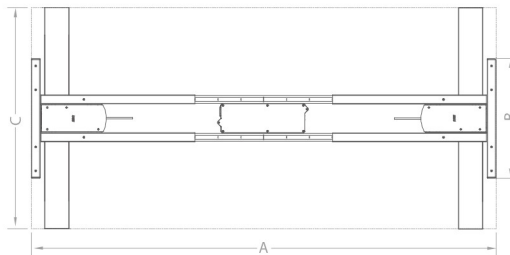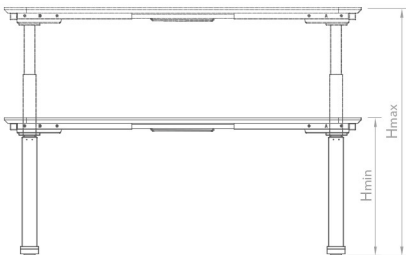

COLOUR



Options
RO 650



120 DEGREE PICTURE

90 DEGREE PICTURE

Handset Options



KDH064
Digital handset



KDH066
Telescopic controller



KDH006
Fixed controller



KDH126
Fixed controller

Foot Option



KDF005
Mounting Hole Position
Center/off-center
Size:24"、30"

Control-unit Options



US: KDDY023N AC120V
EU: KDDY041 AC230V
Dual motor control box



US: KDDY068 AC230V
EU: KDDY068A AC120V
Dual motor control box
0.1W Standby power consumption