

The leading Brand Of China Scooter Industry

Tel: 0086 576 82935958
Fax: 0086 576 82935958
Email: sales@zhongneng.com

Zhejiang Zhongneng Industry Group Co.,Ltd. Taizhou Zhongneng Import And Export Co.,Ltd.
Add: #389 Xinwen Road, Xinqiao Town, Luqiao District, Taizhou City, Zhejiang, China



(Scan this QR code,
You can visit our Official Website immediately)



ZNEN

Ride Your Way!



—1987—
www.znen.com

ZHEJIANG ZHONGNENG INDUSTRY GROUP CO.,LTD.

Since 1987

Zhejiang Zhongneng Industry Group Co., Ltd.
WWW.ZNEN.COM

ROAR.....01
VISTA.....02
VES.....03
LEGEND.....04
F8.....05
F9.....06
A9.....07
R8.....08
REVIVAL.....09
ZNEN Q.....10
ZNEN-KING.....11
KANGAROO.....12
ZOOM.....13
LOSAIL.....14
F7.....15
AURORA SERIES.....16

SNAIL.....17
GOLDFISH.....18
VPA.....19
X6.....20
ELEGANCE.....21
GRACE.....22
PSC.....23
PSC II.....24
A3.....25
SCOOPY.....26
CLICK.....27
PCX.....28
BWS.....29
R-X.....30
F22.....31
F35.....32

EMPEROR II.....33
CRYSTAL.....34
BREEZE.....35
SUN 3.....36
VELOCITY.....37
ZNEN-BOMB.....38
SKYLARK.....39
FALCON SERIES.....40
DBR.....41
FLASH.....42
XT-7.....43
CONQUEROR.....44
GULSTAR.....45
VIGOR.....46
GALLOP.....47
STORM.....48

ZNEN MOTOR

ZHEJIANG ZHONGNENG INDUSTRY GROUP CO., LTD.

ROAR



(Scan this QR code,
You can visit our Official Website immediately)



W002 W001 R007 B007

Technical Data	ZN125T-39C	ZN150T-39C	ZN250T-39C
Length/width/height(mm)	2145/830/1240	2145/830/1240	2145/830/1240
Curb weight(kg)	148	148	161
Top speed(km/h)	92	95	100
Tank capacity(L)	9.5	9.5	9.5
Wheelbase(mm)	1520	1520	1545
Max.output kw/(r/min)	6.40/7500	7.10/7500	12.20/6500
Max.torque N.m(r/min)	8.55/6500	9.60/6000	19.5/5000
Displacement(ml)	124.6	149.6	249.8
Oil consumption(L/100)	≤2.8	≤2.9	≤3.1
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	110/90-12 ;110/90-12	110/90-12 ;110/90-12	130/60-13;130/60-13

Technical Data	ZN150T-58
Length/width/height(mm)	2190/755/1140
Curb weight(kg)	143
Top speed(km/h)	90
Tank capacity(L)	11.5
Wheelbase(mm)	1580
Max.output kw/(r/min)	6.20/7000
Max.torque N.m(r/min)	8.0/5500
Displacement(ml)	149.6
Oil consumption(L/100)	≤2.9
Brake mode	Disc/Drum
Tire specifications	130/60-13;130/60-13

W002 W001 R007 B007



VISTA



(Scan this QR code,
You can visit our Official Website immediately)



(Scan this QR code,
You can visit our Official Website immediately)

W002/B001 BL014/B001 R026/B001

Technical Data	ZN50QT-27	ZN50QT-27	ZN125T-27	ZN150T-27
Length/width/height(mm)	1865/770/1090	1865/770/1090	1885/770/1090	1885/770/1090
Curb weight(kg)	90	90	99	99
Top speed(km/h)	25	45	85	90
Tank capacity(L)	6.7	6.7	6.7	6.7
Wheelbase(mm)	1325	1325	1360	1360
Max.output kw/(r/min)	1.30/5500	2.2/7500	5.30/7500	6.2/7000
Max.torque N.m(r/min)	2.4/4700	3.0/7000	7.50/6500	8.00/5500
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10



(Scan this QR code,
You can visit our Official Website immediately)

Y002/WY001 B004/WY001 W002/WY001 R001/WY001 BL016/WY001

Technical Data	ZN50QT-E5	ZN50QT-E5	ZN125T-E5	ZN150T-E5
Length/width/height(mm)	1795/875/1105	1795/875/1105	1840/875/1105	1840/875/1105
Curb weight(kg)	92	92	100	107
Top speed(km/h)	25	45	85	90
Tank capacity(L)	5.0	5.0	5.0	5.0
Wheelbase(mm)	1280	1280	1280	1280
Max.output kw/(r/min)	1.80/7500	2.20/7500	5.43/7500	7.00/7500
Max.torque N.m(r/min)	2.30/6500	2.90/6500	8.20/6000	9.60/6000
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤3.0
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10



Once touches the Legend scooter, what impress you are her enduring beauty, smooth skin and pure mood, which will arouse others' envy and jealousy. Accompanied by the Legend scooter, you will become the focus in your life. The Legend scooter is artistically nurtured by assimilating classical culture. Yesterday's fashion, today's pop, the Legend scooter is sure to be classical.




(Scan this QR code,
You can visit our Official Website immediately)

W002/B001 BL014/B001 R026/B001

Technical Data	ZN50QT-C(2 STROKE)	ZN50QT-C(2 STROKE)	ZN50QT-F(4 STROKE)	ZN50QT-F(4 STROKE)	ZN125T-F	ZN150T-F
Length/width/height(mm)	1925/720/1175	1905/720/1165	1905/720/1165	1905/720/1165	1905/720/1140	1905/720/1140
Curb weight(kg)	102	102	101	101	110	110
Top speed(km/h)	25	45	25	45	85	87
Tank capacity(L)	7.6	7.6	7.6	7.6	7.6	7.6
Wheelbase(mm)	1280	1280	1300	1300	1300	1300
Max.output kw/(r/min)	2.40/6000	2.70/6500	1.55/5500	2.23/7500	5.70/7000	6.00/8000
Max.torque N.m(r/min)	3.90/5500	4.10/5500	2.72/5000	3.05/5500	8.0/5000	8.4/5500
Displacement(ml)	49.6	49.6	49.6	49.6	124.6	151.1
Oil consumption(L/100)	≤1.4	≤2.0	≤1.4	≤2.0	≤2.8	≤2.4
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12



Technical Data	ZN50QT-36	ZN125T-36	ZN150T-36
Length/width/height(mm)	1840/705/1055	1875/705/1055	1875/705/1055
Curb weight(kg)	104	109	109
Top speed(km/h)	45	85	95
Tank capacity(L)	6.5	8.0	8.0
Wheelbase(mm)	1315	1315	1315
Max.output kw/(r/min)	2.23/7500	5.4/7500	6.0/8000
Max.torque N.m(r/min)	3.05/5500	8.4/5500	9.4/5500
Displacement(ml)	49.6	124.6	149.6
Oil consumption(L/100)	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	100/60-12;100/60-12	100/60-12;100/60-12	100/60-12;100/60-12

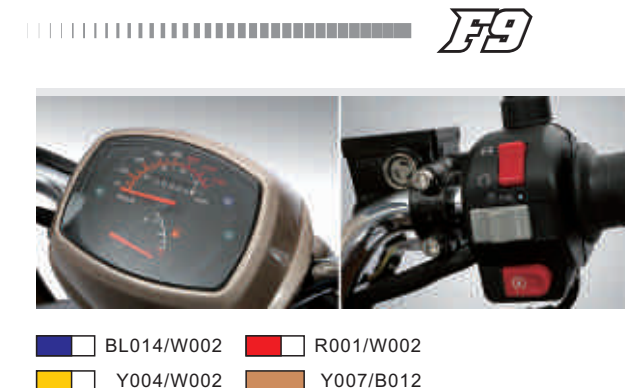

BL014/W002 R001/W002
Y004/W002 Y007/B012



(Scan this QR code,
You can visit our Official Website immediately)

A9

(Scan this QR code,
You can visit our Official Website immediately)



Water Cooler

BL014
 R026
 B004
 Y004

Technical Data	ZN50QT-50D(WATER COOLER)/2 STROKE	ZN50QT-50D(WATER COOLER)/2 STROKE	ZN50QT-50C(AIR COOLER)/2 STROKE	ZN50QT-50C(AIR COOLER)/2 STROKE	ZN125T-50
Length/width/height(mm)	1955/695/1110	1955/695/1110	1955/695/1110	1955/695/1110	1955/695/1110
Curb weight(kg)	97	97	91	91	111
Top speed(km/h)	25	45	25	45	80
Tank capacity(L)	6.0	6.0	6.0	6.0	6.0
Wheelbase(mm)	1395	1395	1395	1395	1380
Max.output kw/(r/min)	3.25/ 7500	3.35/ 7750	3.00/6500	3.00/6500	5.50/7500
Max.torque N.m(r/min)	4.60/5250	4.40/5250	4.50/6000	4.50/6000	8.00/6000
Displacement(ml)	49.2	49.2	49.2	49.2	124.6
Oil consumption(L/100)	≤1.4	≤2.0	≤1.4	≤2.0	≤2.8
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	120/60-13;130/60-13	120/60-13;130/60-13	120/60-13;130/60-13	120/60-13;130/60-13	130/60-13;130/60-13

Technical Data	ZN50QT-22	ZN50QT-22	ZN125T-22	ZN150T-22
Length/width/height(mm)	1825/680/1145	1825/680/1145	1825/680/1145	1825/680/1145
Curb weight(kg)	92	92	105	105
Top speed(km/h)	25	45	85	90
Tank capacity(L)	5.5	5.5	5.5	5.5
Wheelbase(mm)	1280	1280	1300	1300
Max.output kw/(r/min)	1.30/7500	2.10/7500	5.5/7500	6.2/7000
Max.torque N.m(r/min)	2.10/7500	2.80/7000	8.0/6000	8.0/5500
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤3.0
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12

BL014/W002
 R026/W002
 B004/W002
 Y004/W002



(Scan this QR code,
You can visit our Official Website immediately)

B8

REVIVAL



W002/B004
 W002/R010
 BL016/W002/B004
 R001/W002/B004
 R010/W002/B004

Technical Data	ZN50QT-D	ZN50QT-D
Length/width/height(mm)	1690/695/1095	1679/695/1084
Curb weight(kg)	85	85
Top speed(km/h)	25	45
Tank capacity(L)	6.0	6.0
Wheelbase(mm)	1270	1270
Max.output kw/(r/min)	1.80/7500	2.20/7500
Max.torque N.m(r/min)	2.30/6500	2.90/6500
Displacement(ml)	49.6	49.6
Oil consumption(L/100)	≤1.4	≤2.0
Brake mode	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10

ZHEN Q



(Scan this QR code,
You can visit our Official Website immediately)

B004
 BL014/B004
 W002/B004
 R001/B004
 Y002/B004

Technical Data	ZN50QT-11D	ZN50QT-11D	ZN50QT-11E(2 STROKE)
Length/width/height(mm)	1800/660/1040	1800/660/1040	1845/660/1075
Curb weight(kg)	85	85	88
Top speed(km/h)	25	45	45
Tank capacity(L)	5.0	5.0	5.0
Wheelbase(mm)	1265	1265	1305
Max.output kw/(r/min)	1.80/7500	2.20/7500	2.70/6500
Max.torque N.m(r/min)	2.30/6500	2.90/6500	4.10/5500
Displacement(ml)	49.6	49.6	49.2
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	120/70-12;120/70-12



The distinctive design, flexible maneuverability and extraordinary riding experience won most applause for it. As one of the most-applauded self-developed models of ZHEN, it embodies the essence of decades of development of craftsmanship, and it comes shouldering the mission of exceeding the history. The sole purpose of the assiduous practice and repeated deliberation is to present you free and satisfide life experience.

ZNEN-KING



(Scan this QR code,
You can visit our Official Website immediately)

BL014/B001 W001/B001 R001/B001

Technical Data	ZN50QT-19C(2 STROKE)	ZN50QT-19(4 STROKE)	ZN125T-19	ZN150T-9
Length/width/height(mm)	2060/670/1180	2085/670/1175	2085/670/1170	2065/665/1175
Curb weight(kg)	115	113	118	118
Top speed(km/h)	45	45	85	85
Tank capacity(L)	9.0	9.0	9.0	9.0
Wheelbase(mm)	1430	1430	1380	1365
Max.output kw/(r/min)	3.1/8000	2.23/7500	5.1/7500	6. 3/7500
Max.torque N.m(r/min)	4.0/5500	3.05/5500	7.6/5000	9.2/5500
Displacement(ml)	49.2	49.6	124.6	149.6
Oil consumption(L/100)	≤2.0	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	130/60-13;120/70-12	130/60-13;120/70-12	130/60-13;130/60-13	130/60-13;130/60-13



KANGAROO



(Scan this QR code,
You can visit our Official Website immediately)

W002 R001/W002

Technical Data	ZN50QT-12	ZN125T-12	ZN150T-12
Length/width/height(mm)	1775/740/1100	1833/710/1115	1833/710/1115
Curb weight(kg)	85	103	103
Top speed(km/h)	45	80	85
Tank capacity(L)	7.4	7.4	7.4
Wheelbase(mm)	1255	1243	1243
Max.output kw/(r/min)	2.3/7500	5.6/7500	6. 3/7500
Max.torque N.m(r/min)	3.1/5000	7.8/5500	9. 2/5500
Displacement(ml)	49.6	124.6	149.6
Oil consumption(L/100)	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10





Technical Data	ZN125T-18	ZN150T-18
Length/width/height(mm)	2145/730/1235	2145/730/1235
Curb weight(kg)	119	119
Top speed(km/h)	100	105
Tank capacity(L)	9.0	9.0
Wheelbase(mm)	1435	1435
Max.output kw/(r/min)	6. 0/8000	6. 40/7500
Max.torque N.m(r/min)	7.40/5500	9.60/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/Disc	Disc/Disc
Tire specifications	100/80-16;120/80-16	100/80-16;120/80-16

BL014/B001
 W002/B001
 R001/B001
 Y004/B001



(Scan this QR code,
You can visit our Official Website immediately)



(Scan this QR code,
You can visit our Official Website immediately)

WY001
 Y004
 R001
 BL014
 B004

Technical Data	ZN150T-45
Length/width/height(mm)	1995/680/1198
Curb weight(kg)	99
Top speed(km/h)	90
Tank capacity(L)	6.3
Wheelbase(mm)	1326
Max.output kw/(r/min)	6. 2/7000
Max.torque N.m(r/min)	8. 0/5500
Displacement(ml)	149. 6
Oil consumption(L/100)	≤2.9
Brake mode	Disc/Drum
Tire specifications	120/70-12;120/70-12





F7

(Scan this QR code,
You can visit our Official Website immediately)

WY001 Y004 R001 BL014 B004

Technical Data	F7-50	F7-50S	F7-150
Length/width/height(mm)	1911/720/1183	1911/720/1183	1905/720/1140
Curb weight(kg)	97	97	97
Top speed(km/h)	25	45	90
Tank capacity(L)	5.0	5.0	5.0
Wheelbase(mm)	1276	1276	1255
Max.output kw/(r/min)	1.25/7000	2. 23/7500	6. 2/7000
Max.torque N.m(r/min)	2.20/5000	3.10/5500	8.00/5500
Displacement(ml)	49.6	49.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.9
Brake mode	Disc/Disc	Disc/Disc	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12	3.50-10;3.50-10



Technical Data	ZN50QT-K	ZN50QT-KS	ZN125T-K	ZN150T-K
Length/width/height(mm)	1891/872/1090	1891/872/1090	1891/872/1090	1891/872/1090
Curb weight(kg)	91	91	97	90
Top speed(km/h)	25	45	90	90
Tank capacity(L)	4.0	4.0	5.0	5.0
Wheelbase(mm)	1250	1250	1255	1255
Max.output kw/(r/min)	1.25/7000	2. 23/7500	6.30/7500	7.00/7503
Max.torque N.m(r/min)	2.20/5000	3. 1/5000	9.30/5000	9.60/6003
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10

W002 R010 BL014 B004 Y007

AURORA SERIES



(Scan this QR code,
You can visit our Official Website immediately)

Technical Data	ZN50QT-B	ZN50QT-A
Length/width/height(mm)	1709/658/1038	1709/658/1038
Curb weight(kg)	80	80
Top speed(km/h)	25	45
Tank capacity(L)	6.0	6.0
Wheelbase(mm)	1200	1200
Max.output kw/(r/min)	1.80/7000	2.3/8000
Max.torque N.m(r/min)	2.5/5000	3.01/5000
Displacement(ml)	49.6	49.6
Oil consumption(L/100)	≤1.4	≤2.0
Brake mode	Disc/Drum	Disc/Drum
Tire specifications	3.00-10/3.00-10;3.5-10/3.5-10	3.00-10/3.00-10;3.5-10/3.5-10

Y004/W002
 R025/W002
 G005/W002
 R010/W002
 OT002/W002



W002/R008
 BL014/W002/B012
 R010/W002
 B004/R002

Technical Data	ZN50QT-48
Length/width/height(mm)	1695/640/1080
Curb weight(kg)	81
Top speed(km/h)	45
Tank capacity(L)	5.4
Wheelbase(mm)	1120
Max.output kw/(r/min)	2.3/7000
Max.torque N.m(r/min)	3.01/5000
Displacement(ml)	49.6
Oil consumption(L/100)	≤2.0
Brake mode	Disc/Drum
Tire specifications	3.50-10 ; 3.50-10



VPA



(Scan this QR code,
You can visit our Official Website immediately)



W002 Y004 R001 BL014 B004

Technical Data	ZN50QT-30A	ZN50QT-30A	ZN125T-30A	ZN150T-30A
Length/width/height(mm)	1820/685/1135	1820/685/1135	1820/685/1135	1820/685/1135
Curb weight(kg)	93	93	95	98
Top speed(km/h)	25	45	85	90
Tank capacity(L)	5.5	5.5	5.5	5.5
Wheelbase(mm)	1291	1291	1305	1305
Max.output kw/(r/min)	1.80/7500	2.0/7000	6.00/7500	6.20/7000
Max.torque N.m(r/min)	2.30/6500	3.01/5000	8.40/5500	8.00/5500
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10



Technical Data	ZN50QT-41	ZN125T-41	ZN150T-41
Length/width/height(mm)	1905/720/1165	1905/720/1140	1905/720/1140
Curb weight(kg)	101	110	110
Top speed(km/h)	45	80	90
Tank capacity(L)	7.6	7.6	7.6
Wheelbase(mm)	1350	1350	1350
Max.output kw/(r/min)	2.0/7000	5.7/7000	6.2/7000
Max.torque N.m(r/min)	3.01/5000	7.60/5500	8.00/5500
Displacement(ml)	49.6	124.6	149.6
Oil consumption(L/100)	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12; 120/70-12	120/70-12; 120/70-12



BL014/B001 W002/B001 R001/B001 Y004/B001



(Scan this QR code,
You can visit our Official Website immediately)





Technical Data	ZN50QT-M	ZN50QT-M
Length/width/height(mm)	1765/695/1050	1765/695/1050
Curb weight(kg)	85	85
Top speed(km/h)	25	45
Tank capacity(L)	4.5	4.5
Wheelbase(mm)	1270	1270
Max.output kw/(r/min)	1.80/7500	2.20/7500
Max.torque N.m(r/min)	2.30/6500	2.90/6500
Displacement(ml)	49.6	49.6
Oil consumption(L/100)	≤1.4	≤2.0
Brake mode	Disc/drum	Disc/drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10

BL014/B001
 W002/B001
 R001/B001
 Y004/B001

ELEGANCE



(Scan this QR code,
You can visit our Official Website immediately)



GRACE



(Scan this QR code,
You can visit our Official Website immediately)

WB030/B001
 ZR032/B001
 DG028/B001
 FW018/B001
 W002/B001

Technical Data	ZN50QT-56	ZN50QT-56
Length/width/height(mm)	1780/670/1095	1780/670/1095
Curb weight(kg)	81	81
Top speed(km/h)	25	45
Tank capacity(L)	4.7	4.7
Wheelbase(mm)	1265	1265
Max.output kw/(r/min)	1.80/7500	2.20/7500
Max.torque N.m(r/min)	2.30/6500	2.90/6500
Displacement(ml)	49.6	49.6
Oil consumption(L/100)	≤1.4	≤2.0
Brake mode	Disc/drum	Disc/drum
Tire specifications	3.50-10 ; 3.50-10	3.50-10 ; 3.50-10



PSC



(Scan this QR code,
You can visit our Official Website immediately)

BL014/W002 R002/W002 OT002/B001 Y004/B001

Technical Data	ZN50QT-51	ZN50QT-51	ZN80T-51
Length/width/height(mm)	1735/655/1090	1735/655/1090	1735/655/1090
Curb weight(kg)	81	81	81
Top speed(km/h)	25	45	70
Tank capacity(L)	5.0	5.0	5.0
Wheelbase(mm)	1210	1210	1210
Max.output kw/(r/min)	1.60/5500	2.25/7500	3.00/7500
Max.torque N.m(r/min)	2.80/5000	3.10/5000	3.80/6500
Displacement(ml)	49.6	49.6	72.0
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8
Brake mode	Disc/drum	Disc/drum	Disc/drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10	3.50-10;3.50-10



PSC III



(Scan this QR code,
You can visit our Official Website immediately)

BL014 R002 W002 Y004 B003

Technical Data	ZN50QT-51A	ZN50QT-51A
Length/width/height(mm)	1710/655/1050	1710/655/1050
Curb weight(kg)	81	81
Top speed(km/h)	25	45
Tank capacity(L)	5.0	5.0
Wheelbase(mm)	1210	1210
Max.output kw/(r/min)	1.60/5500	2.25/7500
Max.torque N.m(r/min)	2.80/5000	3.10/5000
Displacement(ml)	49.6	49.6
Oil consumption(L/100)	≤1.4	≤2.0
Brake mode	Disc/drum	Disc/drum
Tire specifications	3.50-10 ; 3.50-10	3.50-10 ; 3.50-10



A3



(Scan this QR code, You can visit our Official Website immediately)

WY001
 Y004
 R001
 BL014
 B004

Technical Data	ZN50QT-23	ZN125T-23	ZN150T-23
Length/width/height(mm)	1825/680/1060	1825/680/1060	1825/680/1060
Curb weight(kg)	88	95	95
Top speed(km/h)	45	85	90
Tank capacity(L)	5.0	5.0	5.0
Wheelbase(mm)	1285	1285	1285
Max.output kw/(r/min)	2.0/7000	5.7/7000	6. 2/7000
Max.torque N.m(r/min)	3.01/5000	7.6/5500	8.0/5500
Displacement(ml)	49.6	124.6	149.6
Oil consumption(L/100)	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	70/90-14;80/90-14	70/90-14;80/90-14	70/90-14;80/90-14



Technical Data	ZN125T-43A
Length/width/height(mm)	1905/720/1140
Curb weight(kg)	110
Top speed(km/h)	90
Tank capacity(L)	7.6
Wheelbase(mm)	1250
Max.output kw/(r/min)	6.2/7000
Max.torque N.m(r/min)	8.0/5500
Displacement(ml)	124.6
Oil consumption(L/100)	≤2.9
Brake mode	Disc/Drum
Tire specifications	80/90-14;80/90-14

BL014/W002
 R026/W002
 B004/W002
 Y004/W002

SCOOPY



(Scan this QR code, You can visit our Official Website immediately)

CLICK



(Scan this QR code,
You can visit our Official Website immediately)



■ BL014/B001 ■ W002/B001 ■ R001/B001 ■ Y004/B001

Technical Data	ZN125T-53	ZN150T-53
Length/width/height(mm)	1960/680/1140	1960/680/1140
Curb weight(kg)	95	95
Top speed(km/h)	85	90
Tank capacity(L)	6.7	6.7
Wheelbase(mm)	1300	1300
Max.output kw/(r/min)	5.70/7000	6.20/7000
Max.torque N.m(r/min)	7.60/5500	8.00/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/drum	Disc/drum
Tire specifications	80/90-14;90/90-14	80/90-14;90/90-14

Technical Data	ZN150T-57
Length/width/height(mm)	1950/735/1120
Curb weight(kg)	113
Top speed(km/h)	90
Tank capacity(L)	8
Wheelbase(mm)	1320
Max.output kw/(r/min)	6.20/7000
Max.torque N.m(r/min)	8.00/5500
Displacement(ml)	149.6
Oil consumption(L/100)	≤2.9
Brake mode	Disc/drum
Tire specifications	90/90-14;100/80-14

■ BL014 ■ R002 ■ W001 ■ Y004 ■ B003



PCX



(Scan this QR code,
You can visit our Official Website immediately)

BWS

(Scan this QR code,
You can visit our Official Website immediately)

BL014/B001 W002/B001 R001/B001 Y004/B001

Technical Data	ZN125T-31	ZN150T-31
Length/width/height(mm)	1825/690/1080	1825/690/1080
Curb weight(kg)	102	102
Top speed(km/h)	80	90
Tank capacity(L)	6.5	6.5
Wheelbase(mm)	1300	1300
Max.output kw/(r/min)	5.70/7000	6.2/7000
Max.torque N.m(r/min)	7.60/5500	8.0/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/drum	Disc/drum
Tire specifications	120/90-10;130/90-10	120/90-10;130/90-10

**R-X**

(Scan this QR code,
You can visit our Official Website immediately)

BL014/B001 W002/B001 R001/B001 DY024/B001

Technical Data	ZN125T-31A	ZN150T-31A
Length/width/height(mm)	1942/702/1125	1942/702/1125
Curb weight(kg)	116	116
Top speed(km/h)	80	90
Tank capacity(L)	6.2	6.2
Wheelbase(mm)	1300	1300
Max.output kw/(r/min)	5.70/7000	6.2/7000
Max.torque N.m(r/min)	7.60/5500	8.00/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/Disc	Disc/Disc
Tire specifications	130/60-13,130/60-13	130/60-13,130/60-13



F22



(Scan this QR code,
You can visit our Official Website immediately)



■ BL014/B001 ■ W002/B001 ■ R001/B001 ■ Y004/B001

Technical Data	ZN50QT-32	ZN50QT-32	ZN125T-32	ZN150T-32
Length/width/height(mm)	1865/705/1170	1865/705/1170	1860/705/1160	1860/705/1160
Curb weight(kg)	93	93	107	107
Top speed(km/h)	25	45	85	90
Tank capacity(L)	6.3	6.3	6.3	6.3
Wheelbase(mm)	1295	1295	1324	1324
Max.output kw/(r/min)	1.80/7000	2.23/8000	6.00/8000	7.00/7500
Max.torque N.m(r/min)	2.50/5000	3.01/5000	8.45/5500	9.60/6500
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12



F35



(Scan this QR code,
You can visit our Official Website immediately)



■ BL014/B001 ■ W002/B001 ■ R001/B001 ■ Y007/B001 ■ BG025/B001

Technical Data	ZN50QT-32A	ZN50QT-32A	ZN125T-32A	ZN150T-32A
Length/width/height(mm)	1865/670/1170	1865/670/1170	1860/670/1160	1860/670/1160
Curb weight(kg)	93	93	107	107
Top speed(km/h)	25	45	85	90
Tank capacity(L)	6.3	6.3	6.3	6.3
Wheelbase(mm)	1324	1324	1324	1324
Max.output kw/(r/min)	1.80/7000	2.23/8000	6.0/8000	7.00/7500
Max.torque N.m(r/min)	2.50/5000	3.01/5000	8.45/5500	9.60/6500
Displacement(ml)	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤1.4	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12



EMPEROR II



(Scan this QR code,
You can visit our Official Website immediately)

GY009/B001 R025/B001 R026/B001 Y004/B001 BL014/B001

Technical Data	ZN125T-46	ZN150T-46
Length/width/height(mm)	1850/600/1260	1850/600/1260
Curb weight(kg)	95	95
Top speed(km/h)	80	90
Tank capacity(L)	5.5	5.5
Wheelbase(mm)	1300	1300
Max.output kw/(r/min)	5.70/7000	6.20/7000
Max.torque N.m(r/min)	7.60/5500	8.00/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum
Tire specifications	90/90-12;3.50-10	90/90-12;3.50-10



Technical Data	ZN125T-3S	ZN150T-3S
Length/width/height(mm)	1942/702/1125	1942/702/1125
Curb weight(kg)	120	120
Top speed(km/h)	80	90
Tank capacity(L)	6.2	6.2
Wheelbase(mm)	1310	1310
Max.output kw/(r/min)	5.70/7000	6.20/7000
Max.torque N.m(r/min)	7.60/5500	8.00/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10

CRYSTAL



W002 BL014/B004 OT002/B004 R001/B004 Y002/B004



(Scan this QR code,
You can visit our Official Website immediately)



BREEZE



(Scan this QR code,
You can visit our Official Website immediately)



W002 B004 GY009 BL014 Y004

Technical Data	ZN50QT-52	ZN125T-52
Length/width/height(mm)	1995/680/1198	1995/680/1198
Curb weight(kg)	100	100
Top speed(km/h)	75	75
Tank capacity(L)	6.3	6.3
Wheelbase(mm)	1250	1250
Max.output kw/(r/min)	2.0/7500	5.30/7500
Max.torque N.m(r/min)	3.01/5000	7.50/6500
Displacement(ml)	49.6	124.6
Oil consumption(L/100)	≤2.0	≤2.9
Brake mode	Disc/Drum	Disc/Drum
Tire specifications	3.50-10;3.50-10	3.50-10;3.50-10



Technical Data	ZN50QT-11F(2 STROKE)	ZN50QT-11B(4 STROKE)	ZN50QT-11B(4 STROKE)
Length/width/height(mm)	1770/665/1135	1706/650/1080	1706/650/1080
Curb weight(kg)	84	80	80
Top speed(km/h)	45	25	45
Tank capacity(L)	4.8	5.4	5.4
Wheelbase(mm)	1265	1220	1220
Max.output kw/(r/min)	3.10/8000	1.55/5501	2.23/7500
Max.torque N.m(r/min)	4.0/5500	2.72/5001	3.10/5500
Displacement(ml)	49.2	49.6	49.6
Oil consumption(L/100)	≤2.2	≤1.4	≤2.0
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	120/70-12 ;120/70-12	3.50-10 ; 3.50-10	3.50-10 ; 3.50-10

W002/B004 ZB032/B001 R026/B004 Y004/B004 B004

SUN 3



(Scan this QR code,
You can visit our Official Website immediately)

VELOCITY



(Scan this QR code,
You can visit our Official Website immediately)



W002 B004 R026 BL014 Y004

Technical Data	ZN125T-42A	ZN150T-42A
Length/width/height(mm)	1905/720/1140	1905/720/1140
Curb weight(kg)	110	110
Top speed(km/h)	80	87
Tank capacity(L)	7.6	7.6
Wheelbase(mm)	1350	1350
Max.output kw/(r/min)	5.70/7000	6.2/7000
Max.torque N.m(r/min)	7.60/5500	8.00/5500
Displacement(ml)	124.6	149.6
Oil consumption(L/100)	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12



ZNEN-BOMB



(Scan this QR code,
You can visit our Official Website immediately)



BL014/B001 W002/B001 R001/B001 FG022/B001

Technical Data	ZN50QT-25A(2 Stroke)	ZN50QT-15A(4 Stroke)	ZN50QT-15A(4 Stroke)	ZN125T-15A	ZN150T-5A
Length/width/height(mm)	1810/685/1150	1865/685/1175	1865/685/1175	1865/685/1175	1865/685/1175
Curb weight(kg)	88	88	88	105	107
Top speed(km/h)	45	25	45	85	90
Tank capacity(L)	4.8	4.8	4.8	4.8	4.8
Wheelbase(mm)	1280	1285	1285	1280	1280
Max.output kw/(r/min)	3.10/8000	1.80/7000	2.23/8000	6.0/8000	6.3/7500
Max.torque N.m(r/min)	4.0/5500	2.50/5000	3.01/5000	8.45/5500	9.2/5500
Displacement(ml)	49.2	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤2.2	≤1.4	≤2.0	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12	120/70-12;120/70-12



SKYLARK



(Scan this QR code,
You can visit our Official Website immediately)



BL014/B001 W002/B001 R001/B001 Y004/B001

Technical Data	ZN150T-7G
Length/width/height(mm)	1980/700/1150
Curb weight(kg)	116
Top speed(km/h)	87
Tank capacity(L)	6.4
Wheelbase(mm)	1380
Max.output kw/(r/min)	6.2/7500
Max.torque N.m(r/min)	9.2/7500
Displacement(ml)	149.6
Oil consumption(L/100)	≤2.9
Brake mode	Disc/Disc
Tire specifications	130/60-13;130/60-13

Technical Data	ZN50QT-7B(2 STROKE)	ZN50QT-8B(4 STROKE)	ZN50QT-8B(4 STROKE)	ZN125T-7B	ZN150T-7B
Length/width/height(mm)	1980/702/1106	1955/702/1106	1955/702/1106	1942/702/1106	1942/702/1106
Curb weight(kg)	97	110	110	118	118
Top speed(km/h)	45	25	45	85	90
Tank capacity(L)	6.4	6.4	6.4	6.4	6.4
Wheelbase(mm)	1365	1460	1460	1365	1365
Max.output kw/(r/min)	3.1/8000	1.80/7000	2.05/8000	5.7/7000	6.25/7500
Max.torque N.m(r/min)	4.0/5500	2.50/5000	2.70/7000	8.0/5500	9.4/5500
Displacement(ml)	49.6	49.6	49.6	124.6	149.6
Oil consumption(L/100)	≤2.2	≤1.4	≤2.2	≤2.8	≤2.9
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Disc	Disc/Drum
Tire specifications	130/60-13;120/70-12	130/60-13;120/70-12	130/60-13;120/70-12	130/60-13;130/60-13	130/60-13;130/60-13

W002/B001 BL014/B001 R001/B001 Y004/B001 B004/B001



(Scan this QR code,
You can visit our Official Website immediately)

FALCON SERIES



DBR

(Scan this QR code,
You can visit our Official Website immediately)



■ BL014 □ W002 ■ R001 ■ DY024 ■ B001

Technical Data	FT150-9C	FT200-8C	FT250-9C
Length/width/height(mm)	2050/755/1380	2050/755/1380	2050/755/1380
Curb weight(kg)	115	115	115
Top speed(km/h)	90	90	90
Tank capacity(L)	15	15	15
Wheelbase(mm)	1370	1370	1370
Max.output kw/(r/min)	9.0/9000	9.20/7500	11.5/7500
Max.torque N.m(r/min)	9.0/7500	13/6000	17.0/5500
Displacement(ml)	149	149	223
Oil consumption(L/100)	≤2.2	≤2.3	≤2.5
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	110/70-17;120/80-17	110/70-17;120/80-17	110/70-17;120/80-17

Technical Data	FT50-9C	FT125-9C	FT150-9C
Length/width/height(mm)	2060/745/1150	2060/745/1150	2060/745/1150
Curb weight(kg)	123	130	130
Top speed(km/h)	45	90	90
Tank capacity(L)	20	20	20
Wheelbase(mm)	1290	1290	1290
Max.output kw/(r/min)	2.6/8500	8.0/8500	9.0/9000
Max.torque N.m(r/min)	3.0/7500	8.5/7500	9.0/7500
Displacement(ml)	48	124	149
Oil consumption(L/100)	≤1.5	≤2.1	≤2.2
Brake mode	Disc/drum	Disc/drum	Disc/drum
Tire specifications	2.75-18;110/90-16	2.75-18;110/90-16	2.75-18;110/90-16

■ BL014 □ W002 ■ R001 ■ DY024 ■ B001

**FLASH**

(Scan this QR code,
You can visit our Official Website immediately)



XT-7



(Scan this QR code,
You can visit our Official Website immediately)



W002
 B004
 R026
 BL014
 Y004

Technical Data	FT50-12C	FT125-10C
Length/width/height(mm)	2100/715/1280	2100/715/1280
Curb weight(kg)	108	115
Top speed(km/h)	45	90
Tank capacity(L)	15	15
Wheelbase(mm)	1300	1300
Max.output kw/(r/min)	2.6/8500	8.0/8500
Max.torque N.m(r/min)	3.0/7500	8.5/7500
Displacement(ml)	48	124
Oil consumption(L/100)	≤1.5	≤2.1
Brake mode	Disc/drum	Disc/drum
Tire specifications	2.75-18;3.00-18	2.75-18;3.00-18

CONQUEROR



(Scan this QR code,
You can visit our Official Website immediately)



W002
 B004
 R026
 BL014
 Y004

Technical Data	FT50Q-9	FT125-9C	FT150-9C	FT200-9C
Length/width/height(mm)	2055/760/1112	2060/745/1135	2060/745/1135	2060/745/1135
Curb weight(kg)	122.5	130	130	130
Top speed(km/h)	45	90	90	100
Tank capacity(L)	15	15	15	15
Wheelbase(mm)	1295	1290	1290	1290
Max.output kw/(r/min)	2.4/6000	8.5/8500	9.0/9000	10.8/8000
Max.torque N.m(r/min)	3.3/5500	11.5/7500	9.0/7500	13.8/6500
Displacement(ml)	48	124.1	149	197
Oil consumption(L/100)	≤1.5	≤2.1	≤2.2	≤2.8
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	2.75-18;3.25-18	2.75-18;3.25-18	2.75-18;3.25-18	2.75-18;3.25-18



GULSTAR



(Scan this QR code,
You can visit our Official Website immediately)



■ BL014 □ W002 ■ R001 ■ DY024 ■ B001

Technical Data	FT125-9C	FT150-9C	FT200-9C
Length/width/height(mm)	2060/745/1136	2060/745/1136	2060/745/1136
Curb weight(kg)	130	130	130
Top speed(km/h)	90	90	110
Tank capacity(L)	15	15	15
Wheelbase(mm)	1295	1295	1295
Max.output kw/(r/min)	7.2/8500	9.0/9000	10.8/8000
Max.torque N.m(r/min)	8.5/7500	9.0/7500	13.8/6500
Displacement(ml)	124.1	149	197
Oil consumption(L/100)	≤2.1	≤2.2	≤2.8
Brake mode	Disc/Disc	Disc/Disc	Disc/Disc
Tire specifications	2.75-18;3.25-18	2.75-18;3.25-18	2.75-18;3.25-18

Technical Data	FT50-2C	FT125-2C	FT150-2C	FT200-2C
Length/width/height(mm)	1970/750/1120	1970/750/1120	1970/750/1120	1970/750/1120
Curb weight(kg)	96.5	104	104	104
Top speed(km/h)	45	90	90	100
Tank capacity(L)	12	12	12	12
Wheelbase(mm)	1290	1290	1290	1290
Max.output kw/(r/min)	2.6/8500	7.2/8500	9.0/9000	10.8/8000
Max.torque N.m(r/min)	3.0/7500	8.5/7500	9.0/7500	13.8/6500
Displacement(ml)	48	124.1	149	197
Oil consumption(L/100)	≤1.5	≤1.5	≤2.2	≤2.8
Brake mode	Disc/Drum	Disc/Drum	Disc/Drum	Disc/Drum
Tire specifications	2.75-18;110/90-16	2.75-18;110/90-16	2.75-18;110/90-16	2.75-18;110/90-16

■ BL014 □ W002 ■ R001 ■ DY024 ■ B001



VIGOR




(Scan this QR code,
You can visit our Official Website immediately)

GALLOP



(Scan this QR code,
You can visit our Official Website immediately)

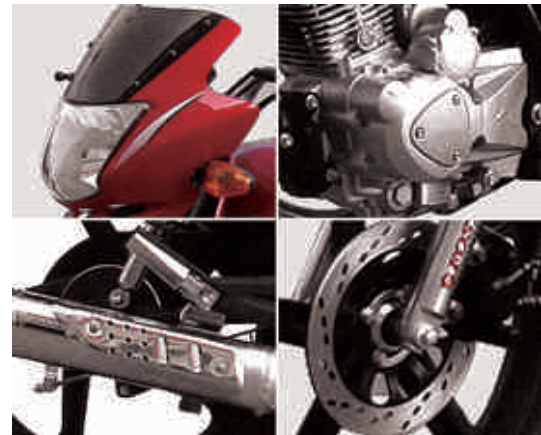


	BL014	W002	R001	DY024	B001
Technical Data					
	FT50-10C	FT125-10C	FT150-10C	FT200-10C	
Length/width/height(mm)	2450/740/1130	2450/740/1130	2450/740/1130	2450/740/1130	
Curb weight(kg)	117.5	125	125	125	
Top speed(km/h)	45	90	90	100	
Tank capacity(L)	13	13	13	13	
Wheelbase(mm)	1295	1295	1295	1295	
Max.output kw/(r/min)	2.4/6000	7.2/8500	9.0/9000	10.8/8000	
Max.torque N.m(r/min)	3.3/5500	8.5/7500	9.0/7500	13.8/6500	
Displacement(ml)	48	124.1	149	149	
Oil consumption(L/100)	≤1.5	≤2.1	≤2.2	≤2.8	
Brake mode	Disc/drum	Disc/drum	Disc/drum	Disc/drum	
Tire specifications	2.75-18;3.25-18	2.75-18;3.25-18	2.75-18;3.25-18	2.75-18;3.25-18	

STORM



	BL014	W002	R001	DY024	B001
Technical Data					
	FT125-8(SINGLE CYLINDER)	FT150-8(SINGLE CYLINDER)	FT125-8(DOUBLE CYLINDER)	FT250-8(DOUBLE CYLINDER)	
Length/width/height(mm)	2225/790/1100	2225/790/1100	2225/790/1100	2225/790/1100	
Curb weight(kg)	155	155	163	163	
Top speed(km/h)	90	90	90	110	
Tank capacity(L)	13	13	13	13	
Wheelbase(mm)	1450	1450	1450	1450	
Max.output kw/(r/min)	7.2/8500	9.0/9000	7.8/10000	12.5/8000	
Max.torque N.m(r/min)	8.5/7500	9.0/7500	8.6/8500	15.0/6000	
Displacement(ml)	124.1	149	124.7	234	
Oil consumption(L/100)	≤2.1	≤2.2	≤2.1	≤2.8	
Brake mode	Disc/drum	Disc/drum	Disc/drum	Disc/drum	
Tire specifications	3.50-16;130/90-15	3.50-16;130/90-15	110/90-16;130/90-15	3.50-16;130/90-15	

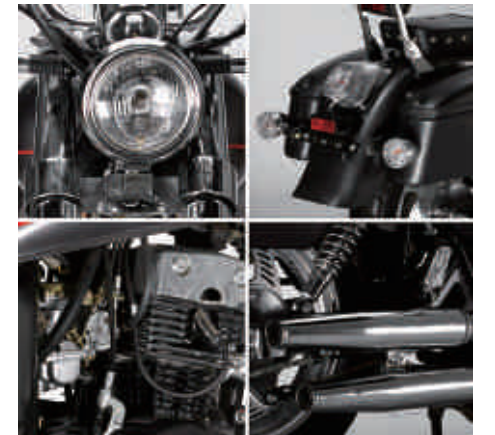

Model	PACKING MODE	PACKAGE SIZE (MM)	(40*HQ)/QUANTITY
ROAR	CBU iron package	2200*750*1260	32
VISTA	CBU iron package	2200*750*1260	32
VES	CBU iron package	1980*750*1160	36
	SKD iron package	1980*750*860	54
LEGEND	SKD iron package	1900*580*860	75
F8	CBU iron package	1980*630*1240	38
	SKD iron package	2160*630*860	57
F9	CBU iron package	1980*630*1240	38
	SKD iron package	1980*630*860	57
A9	CBU iron package	1980*580*1220	48
	SKD iron package	1900*580*860	75
R8	CBU iron package	1900*580*1220	50
	SKD iron package	1900*580*860	75
REVIVAL	CBU iron package	1710*580*1160	56
	SKD iron package	1710*495*860	93
ZHEN Q	CBU iron package	1800*580*1160	56
	SKD iron package	1710*495*860	93
ZHEN-KING	CBU iron package	2100*630*1220	38
	SKD iron package	1870*720*860	57
KANGAROO	CBU iron package	1900*580*1240	50
ZOOM	CBU iron package	2160*630*1200	38
	SKD iron package	2160*630*860	57
LOSAIL	CBU iron package	1960*630*1220	38
F7	CBU iron package	1900*580*1220	50
	SKD iron package	1900*580*860	75
AURORA SERIES	SKD iron package	1900*580*860	75
SNAIL	CBU iron package	1710*580*1120	/
	SKD iron package	1710*580*860	84
GOLDFISH	SKD iron package	1790*580*860	78
A3	CBU iron package	1900*580*1220	50
	SKD iron package	1790*580*860	78
F22	CBU iron package	1900*580*1240	50
	SKD iron package	1900*580*860	75

Model	PACKING MODE	PACKAGE SIZE (MM)	(40*HQ)/QUANTITY
F35	CBU iron package	1900*580*1240	50
	SKD iron package	1710*580*860	75
SKYLERK	CBU iron package	1980*630*1220	38
	SKD iron package	1900*580*860	75
FALCON 3	CBU iron package	1980*580*1280	48
	SKD iron package	1900*580*860	75
FALCON 6/7	CBU iron package	1980*620*1140	38
	SKD iron package	1950*620*800	57
VPA	CBU iron package	1900*580*1200	50
	SKD iron package	1900*580*860	75
X6	CBU iron package	1900*580*1220	50
	SKD iron package	1900*580*860	75
ELEGANCE	CBU iron package	1790*580*1160	52
	SKD iron package	1710*580*860	84
GRACE	CBU iron package	1790*580*1160	52
	SKD iron package	1790*580*860	78
PSC	CBU iron package	1710*580*1120	56
	SKD iron package	1710*580*860	84
PSC II	CBU iron package	1710*580*1160	56
	SKD iron package	1710*580*860	84
CLICK	CBU iron package	1900*580*1220	50
	SKD iron package	1900*580*860	75
PCX	CBU iron package	1980*630*1260	38
BWS	CBU iron package	1900*580*1120	50
	SKD iron package	1900*580*860	75
P-X	CBU iron package	1900*580*1120	50
	SKD iron package	1900*580*860	75
EMPEROR	CBU iron package	1900*580*1220	50
	SKD iron package	1900*580*860	75
SUN 3	CBU iron package	1710*580*1160	56
	SKD iron package	1710*580*860/1710*490*860/1710*460*860	84/93/105
VELOCITY	CBU iron package	1900*575*1200	50
	SKD iron package	1710*575*800	84
ZHEN-BOMB	CBU iron package	1900*580*1220	50
	SKD iron package	1790*580*860	78

Model	PACKING MODE	PACKAGE SIZE (MM)	(40*HQ)/QUANTITY
SCOOPY	CBU iron package	1900*580*1160	50
CRYSTA	CBU iron package	1900*580*1220	50
	SKD iron package	1900*580*860	75
BREEIE	CBU iron package	1790*580*1120	52
	SKD iron package	1710*580*860	84
DBR	SKD wood package	1750*460*810	99
FLASH	SKD wood package	1750*460*810	99
XT-7	SKD wood package	1700*460*810	105
CONQUEROR	SKD wood package	1700*460*850	105
GULSTAR	SKD wood package	1750*460*850	99
VIGOR	SKD wood package	1700*460*850	105
GALLOP	SKD wood package	1770*460*850	99
STORM	SKD wood package	2300*495*1120	48

